

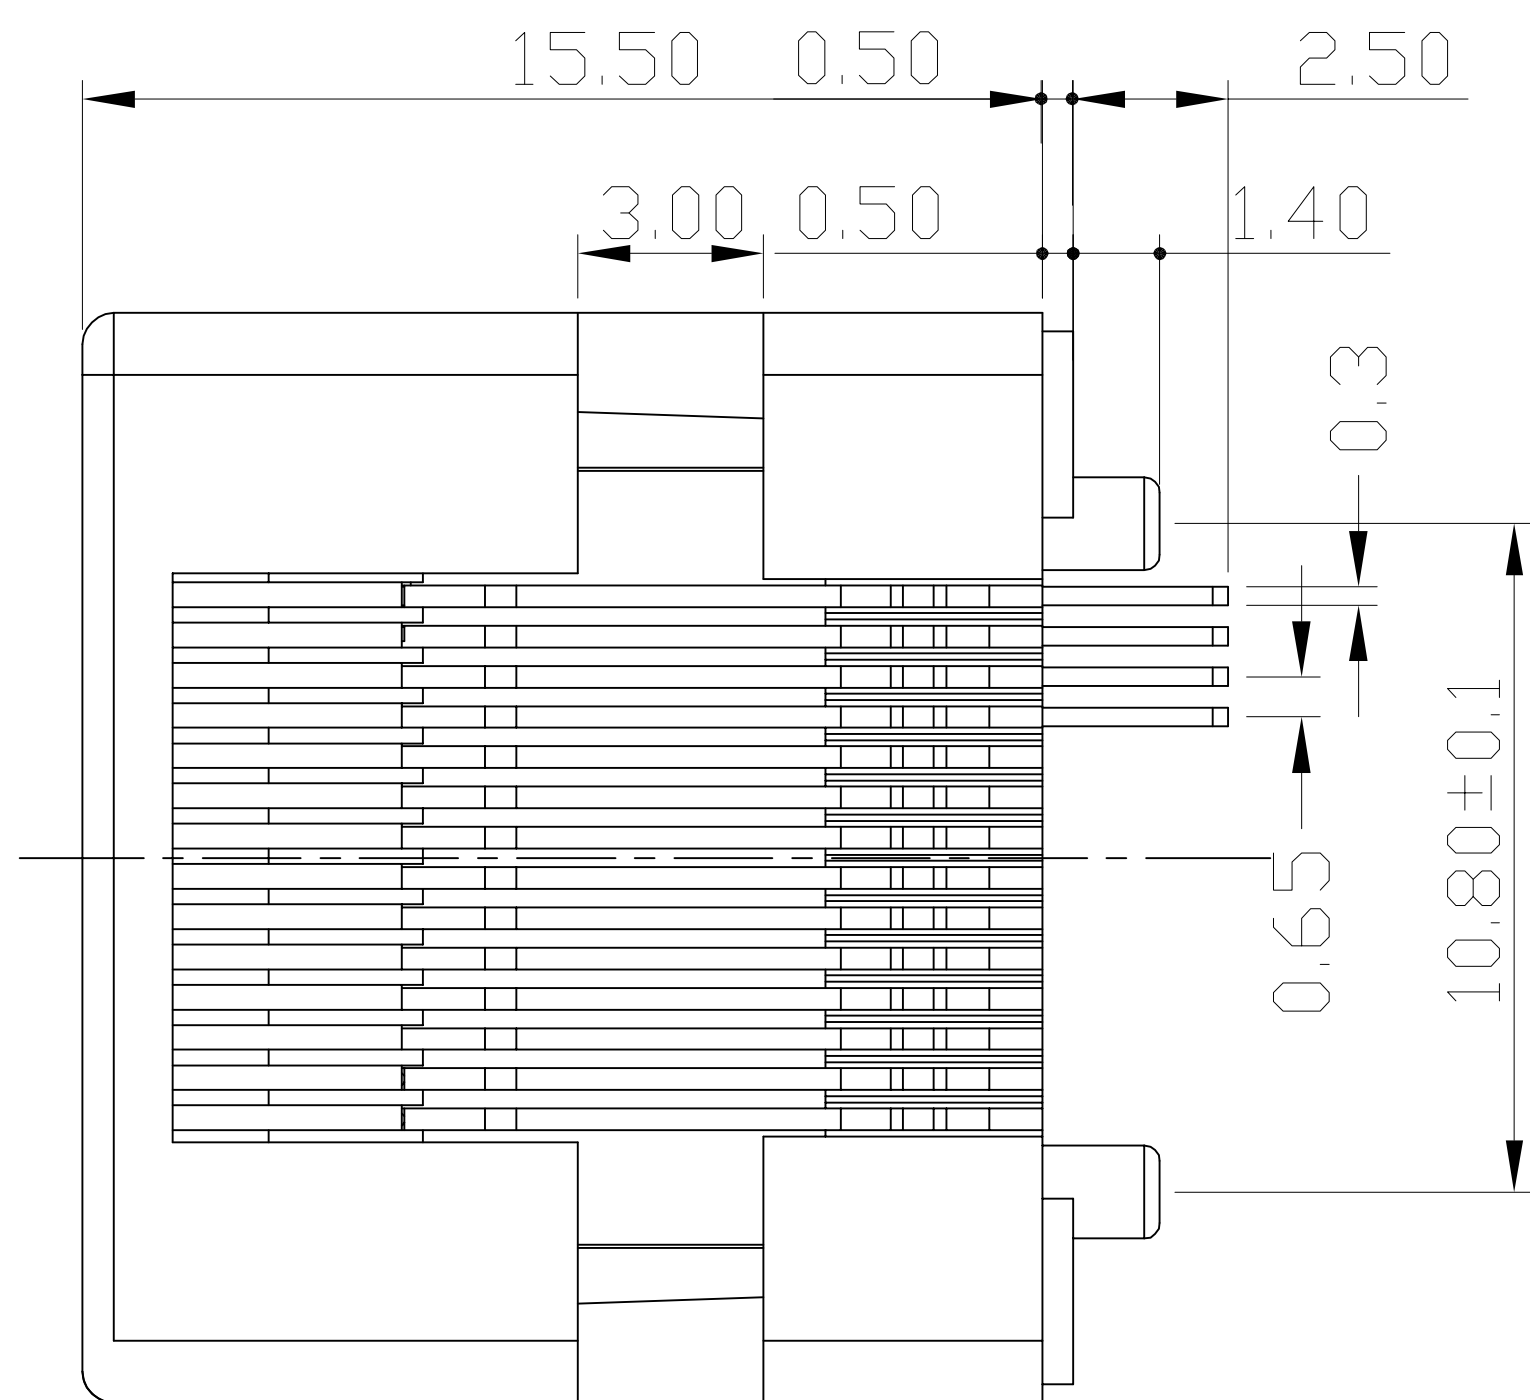
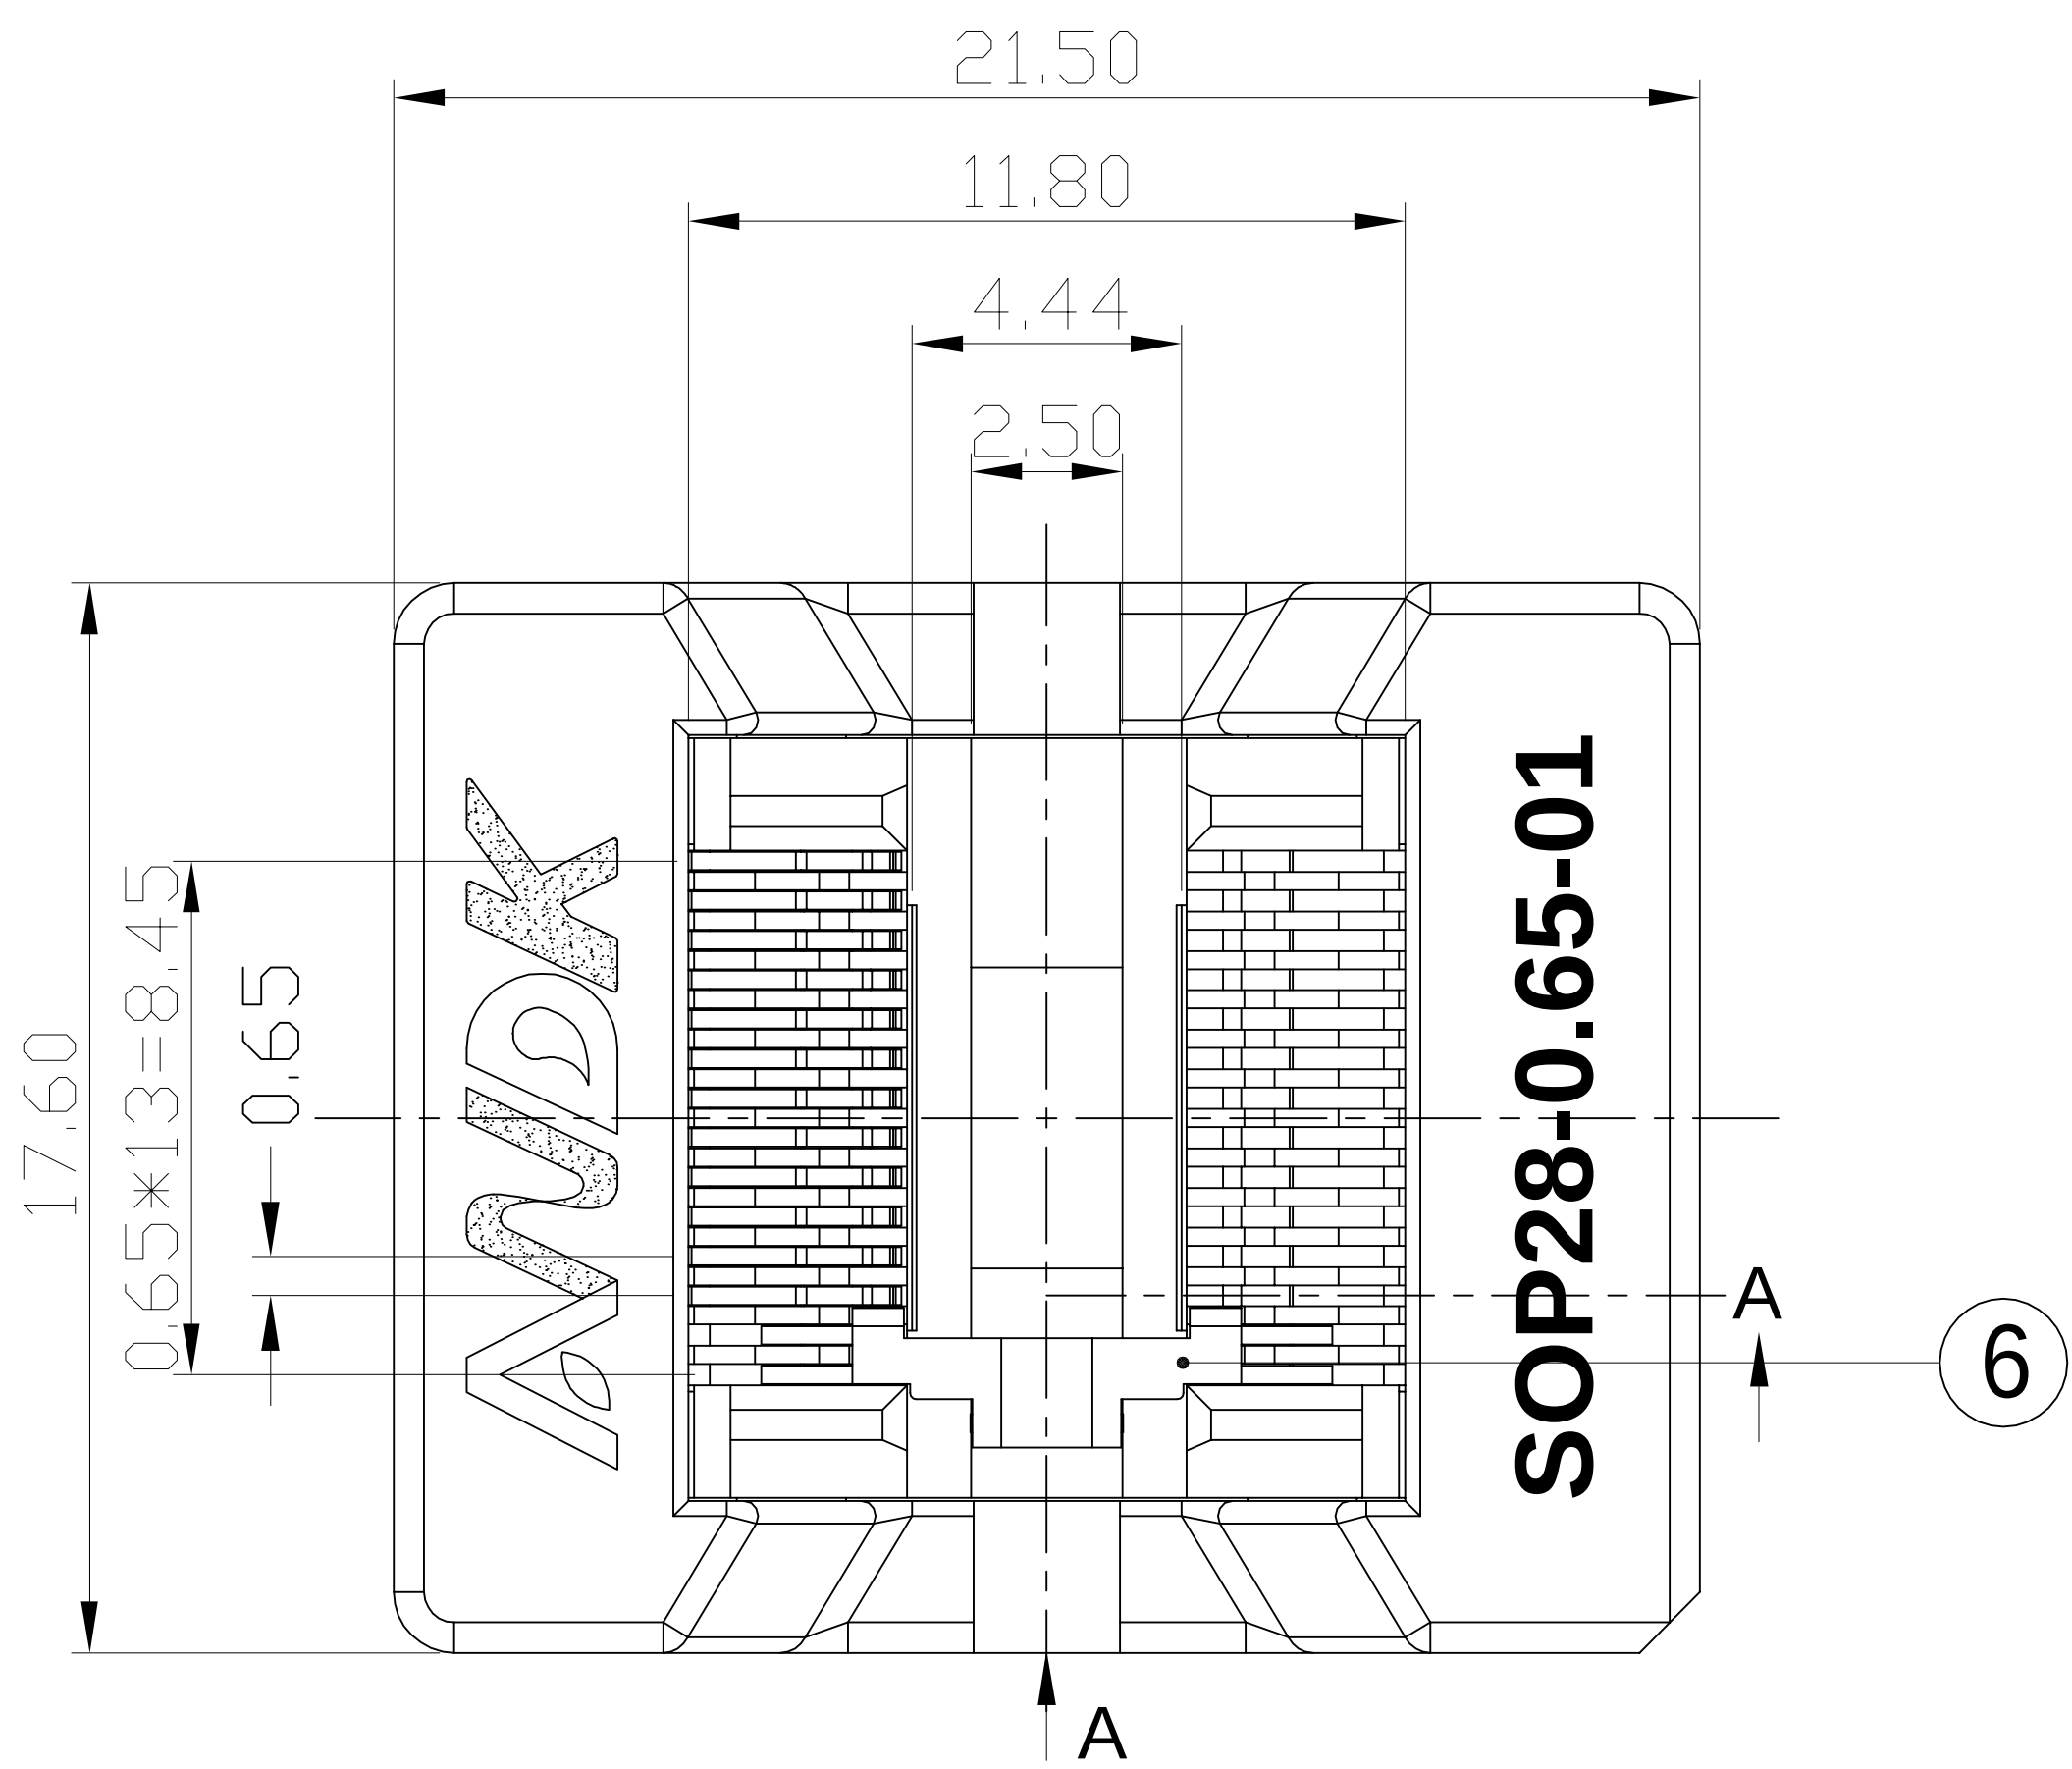


	REVISION	DESCRIPTION	CHECK	APP	DATE	REV.NOTICE.NO
△ 1						
△ 2						
△ 3						

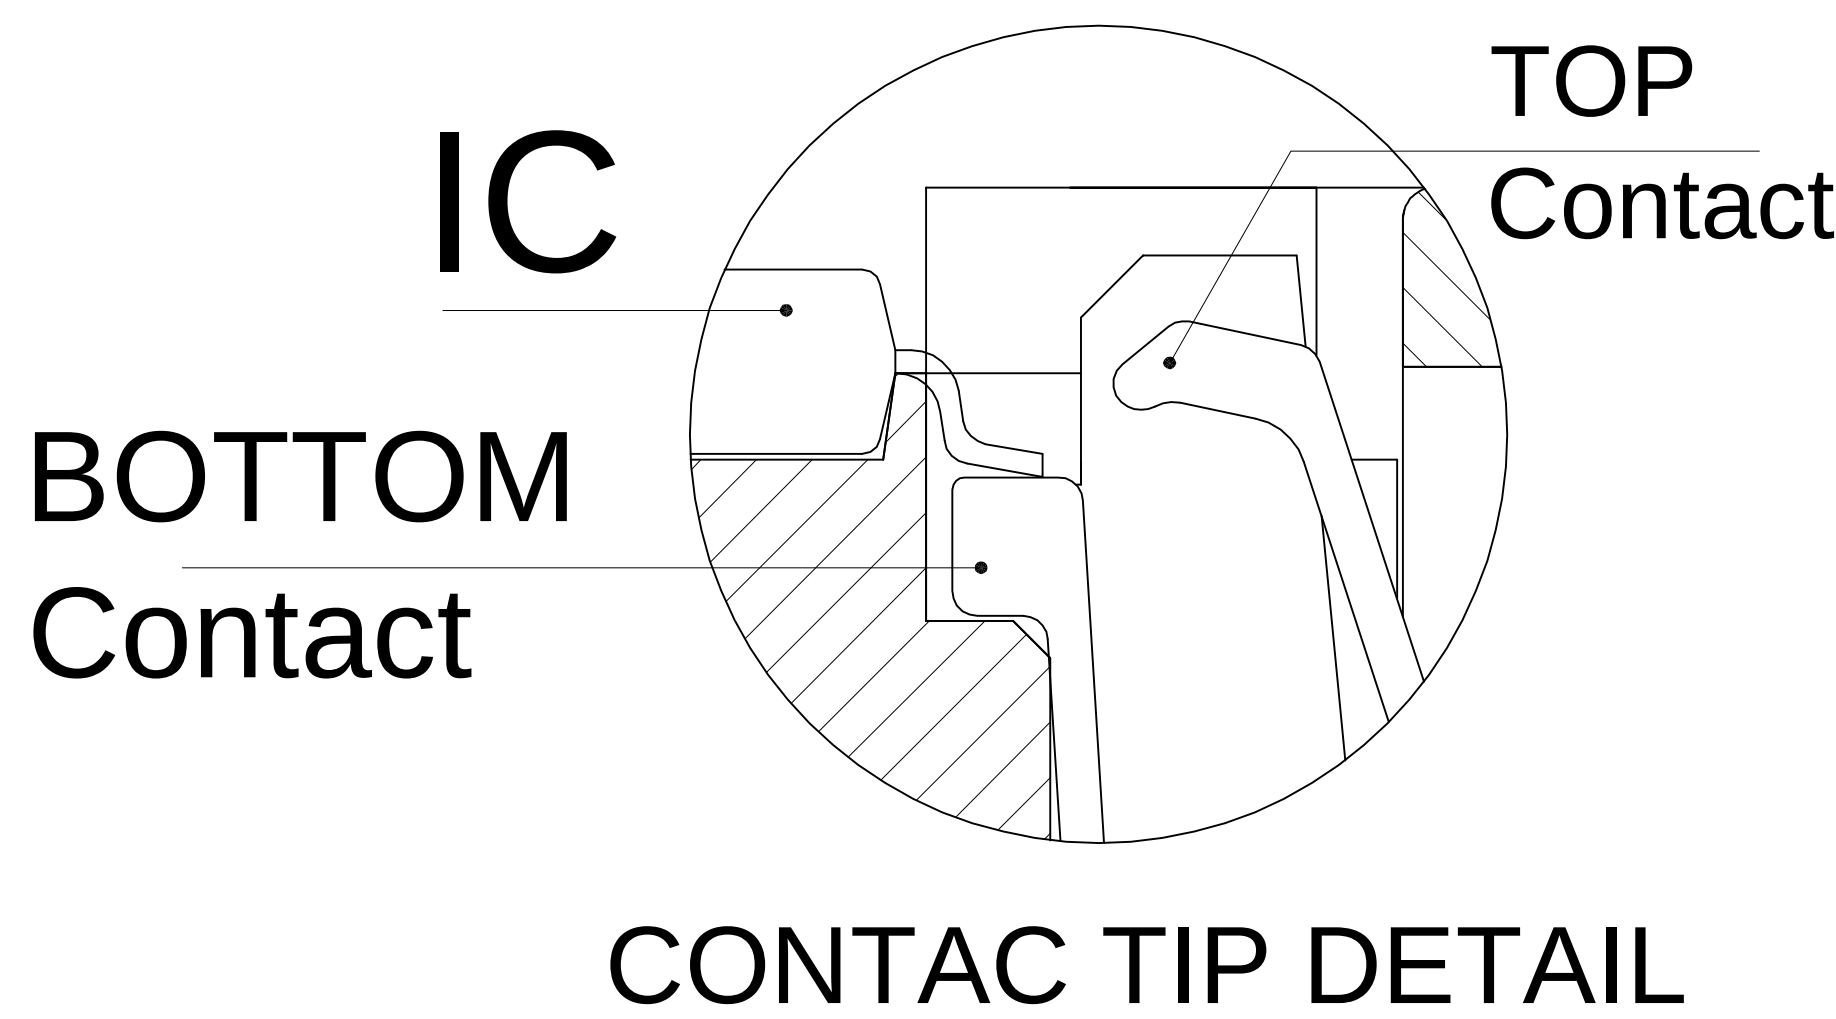

PCB PATTERN (TOP VIEW)

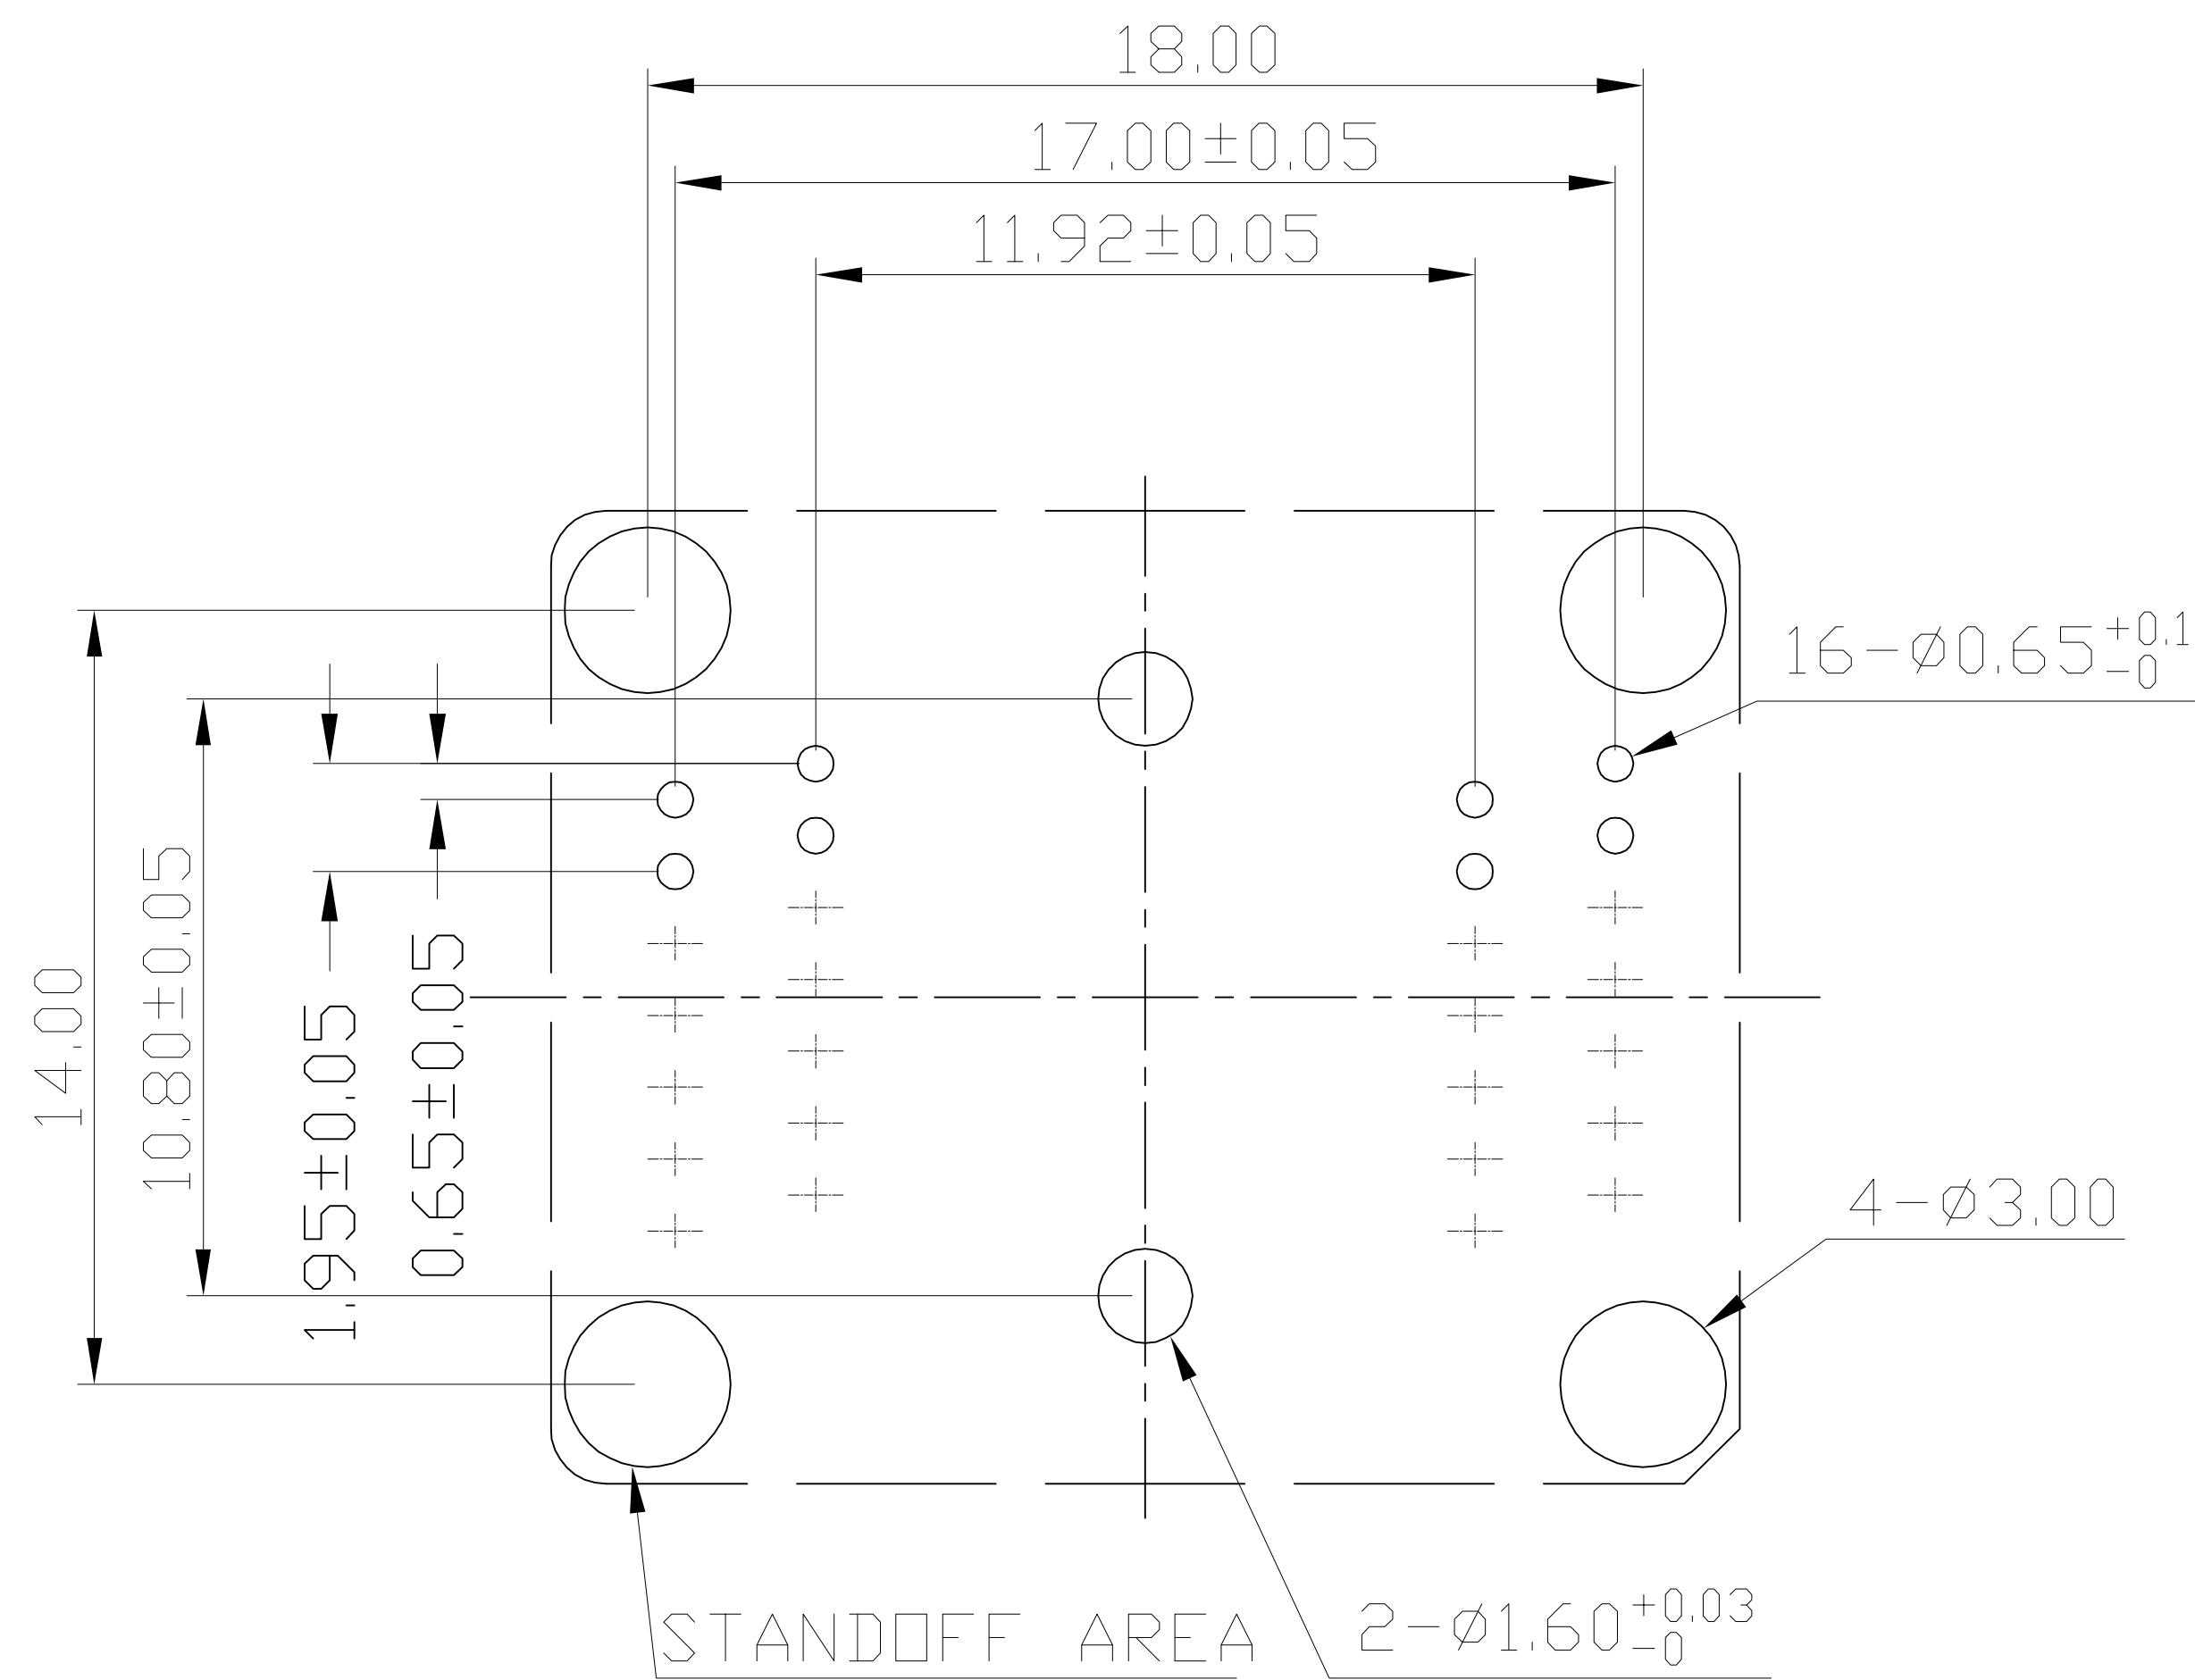


PERFORMANCE

- 1、Insulation Resistance: 1000m Ω Min.At DC 500V
- 2、Dielectric Withstanding Voltage For 1 Minute At AC 700V
- 3、Contact Resistance 30m Ω MAX.at 10mA and 20mV MAX.(Initial)
- 4、Current Rating: 1A max.
- 5、Operation Temperature -55℃ ~+175℃
- 6、Contact Force 5-8g Per Pin (Normal)
- 7、Life Span 15,000 Times (Mechanical)
- 8、Operation Force 1.0 Kg MAX

6	SOP-28-U01-003	ADAPTER	PEI/PES	1	BLACK
5	SOP-28-U01-002	COVER	PEI/PES	1	BLACK
4	30-B-4515X	SPRING	SUS	4	FOR COVER
3	SOP-28-U01-001	BASE	PEI/PES	1	BLACK
2	SOP-28-MSBR-02	CONTACT	BeCu	4	Au PLATING
1	SOP-28-MSBR-01	CONTACT	BeCu	4	Au PLATING
No	Part Number	Name	Material	Q/ty	Note

APPL ICABLE IC

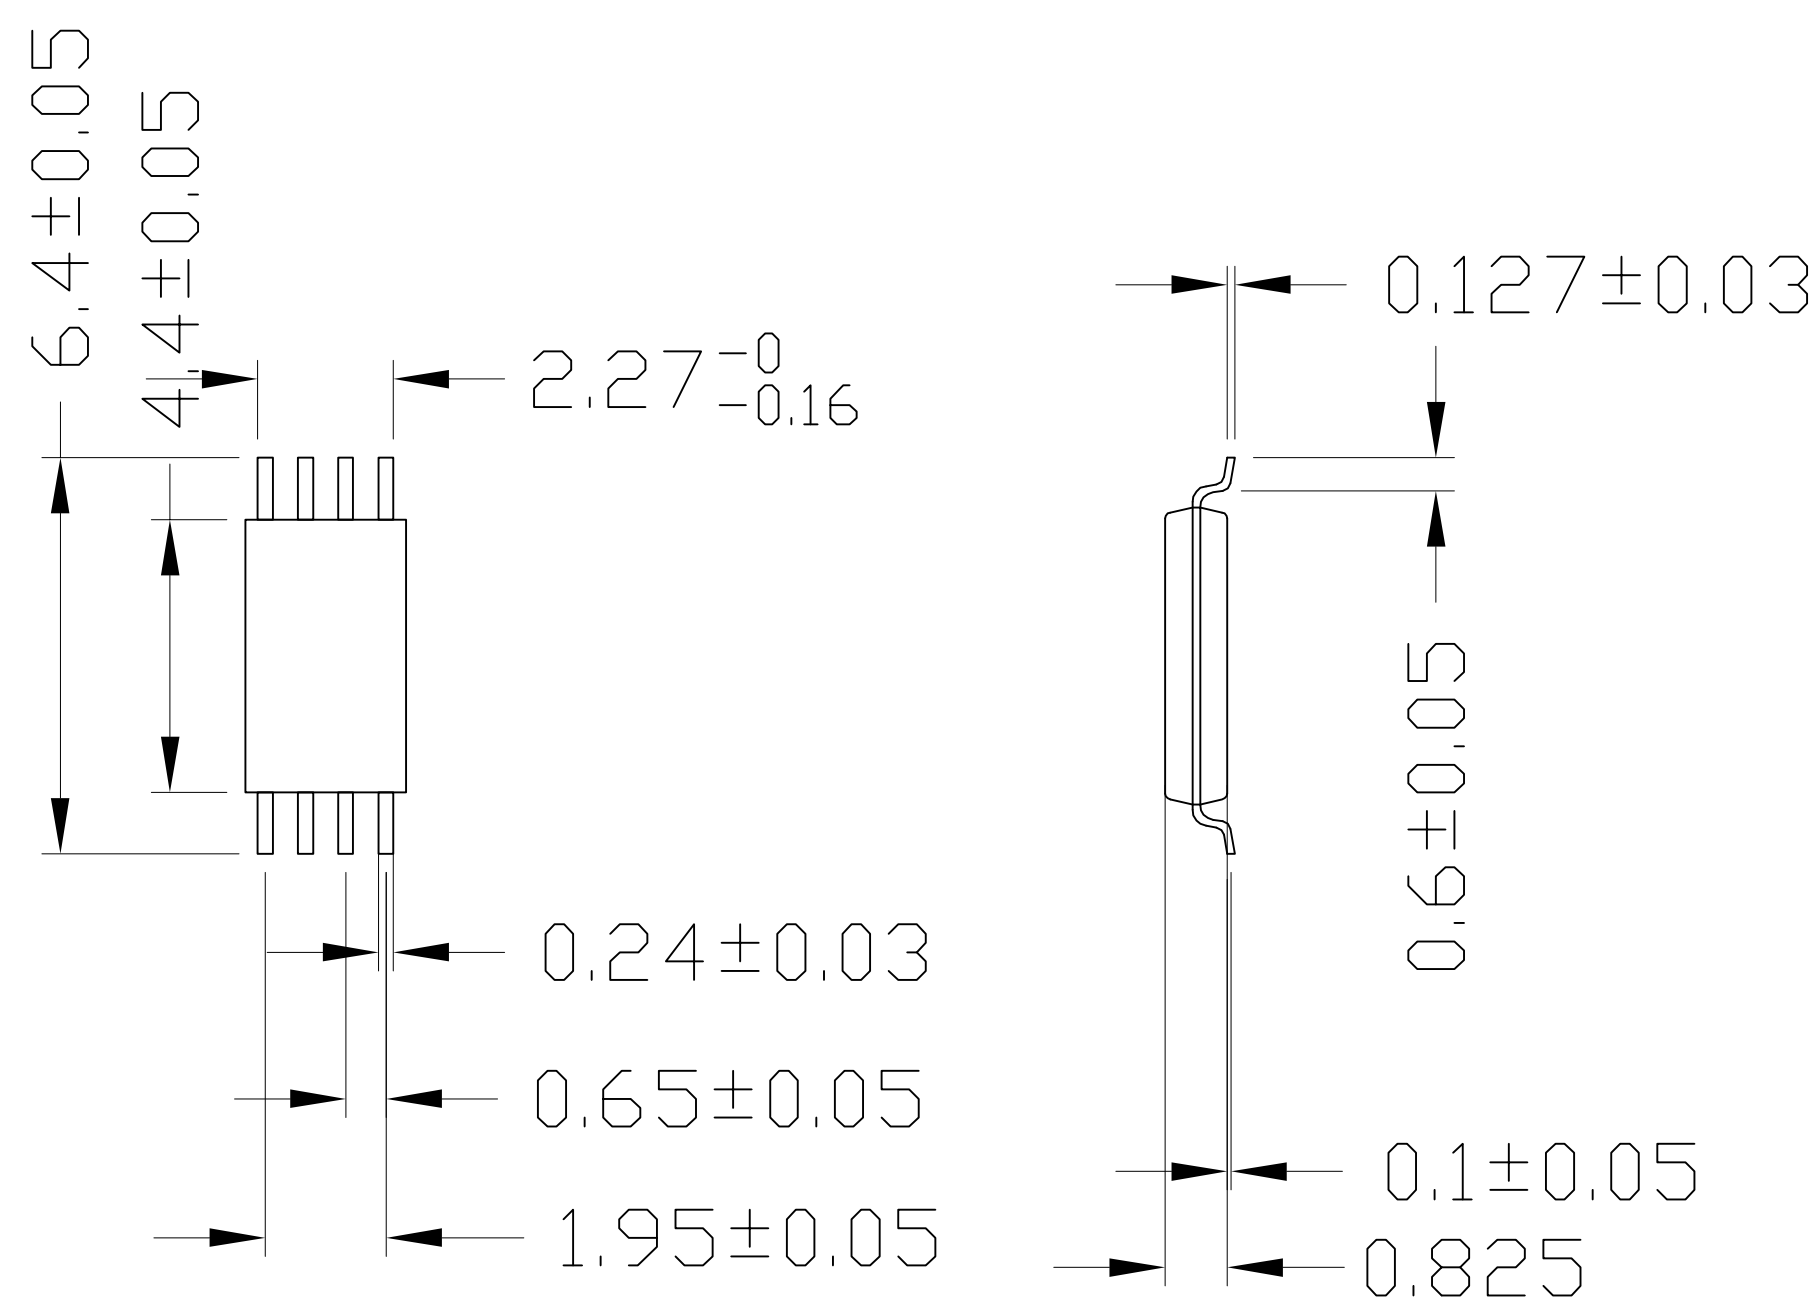

PROJECTION		GENERAL TOLERANCES	±0.10	TITLE	SOP28-0.65 SOCKET
		R E V	A	CLASS	SOP-8(28)-0.65-01
DIMENSION:	mm	SCALE:	1:1	DRW.NO	SOP-8/14/16/24/28-0.65-M01
APP:		DATE:			
CHECK:		DATE:			
DEGK:	ENG02	DATE:	20120829		