
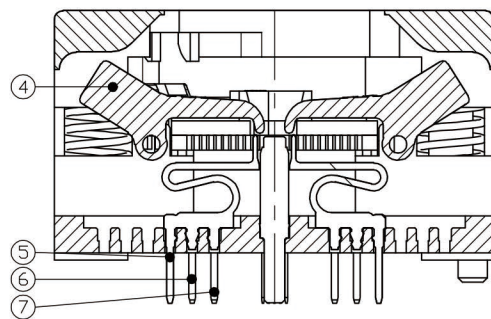
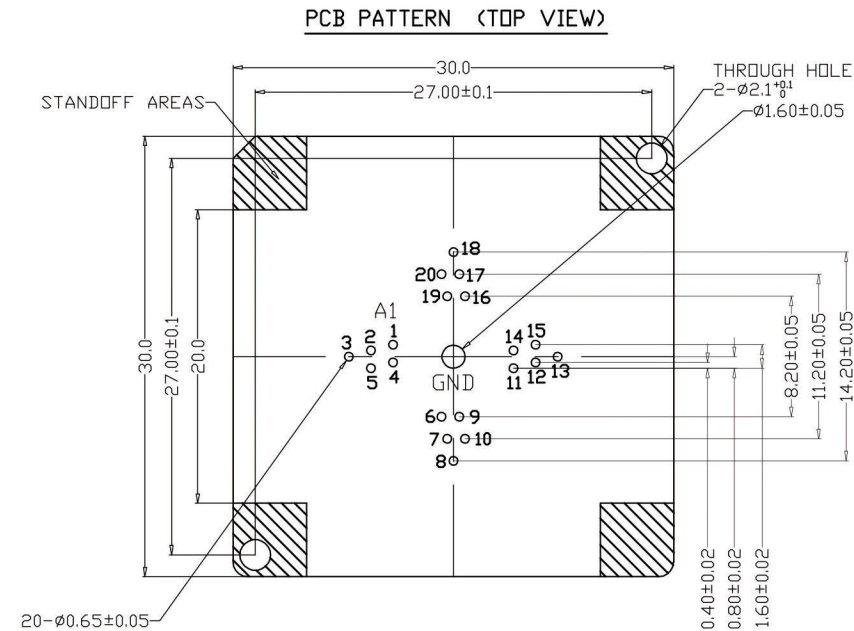
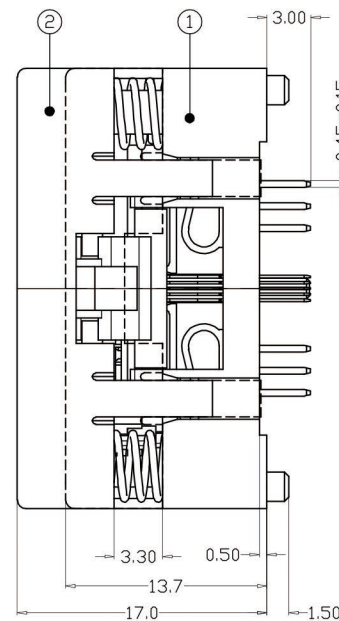



	10		11		12	
	REVISION DESCRIPTION	CHECK	APP	DATE	REV. NOTICE NO	
	1					
	2					

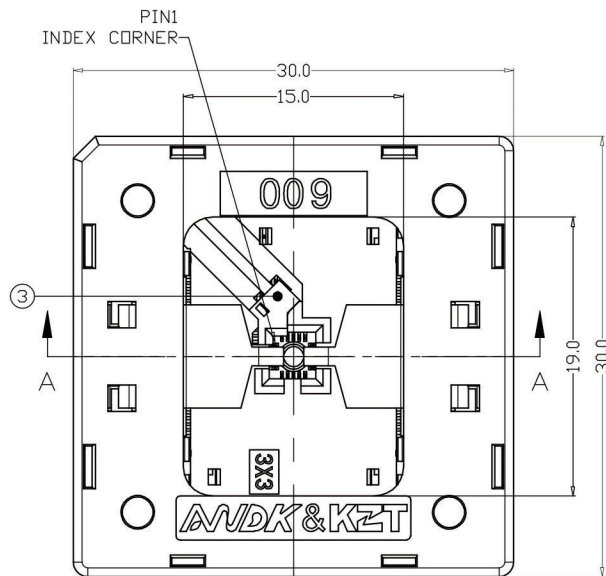

PERFORMANCE

1. Insulation Resistance: 1000 M Ω or more At 500VDC
2. Dielectric withstanding Voltage: For 1 Minute At 700VAC
3. Contact resistance: 50 m Ω or less at 10 mA and 20 mV MAX (Initial)
4. Operation Temperature: -55°C~+155°C
5. Operation Force: 2.0 $\pm$ 0.3kg
6. Contact Force: 20-28g Per Pin
7. Current Rating: 1A max.


APPL ICABLE IC

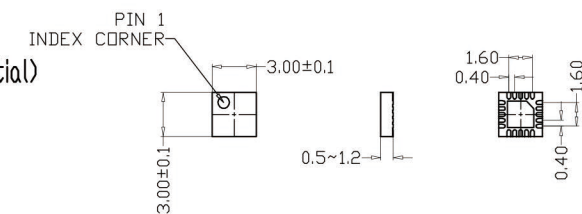

TOP VIEW

SIDE VIEW

BOTTOM VIEW



7	QFN-009-F05-03	CONTACT	BeCu	8	Au PLATING	TOLERANCES	PROJECTION		GENERAL TOLERANCES	±0.10	TITLE	QFN20-0.4-0091TGH(3x3)
6	QFN-009-F04-02	CONTACT	BeCu	8	Au PLATING						CLASS	
5	QFN-009-F03-01	CONTACT	BeCu	4	Au PLATING						DRW.NO	
4	QFN-009-F02-001	BLOCK	LOP	2	WHITE							
3	QFN-009-F01-001	BLOCK	LOP	1	WHITE							
2	QFN-009-G01-001	COVER	PEI/PES/PPS	1	BLACK	X.X ±0.25	APP:	DATE:				
1	QFN-009-U01-001	BASE	LOP	1	WHITE	X.XX ±0.10	CHECK:	DATE:				
No	Part Number	Name	Material	Q/ty	Note	X.XXX±0.05	DEGK:	DATE:				