

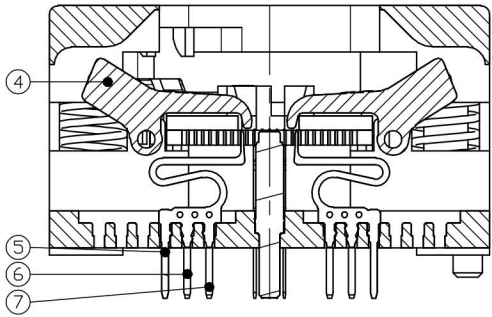
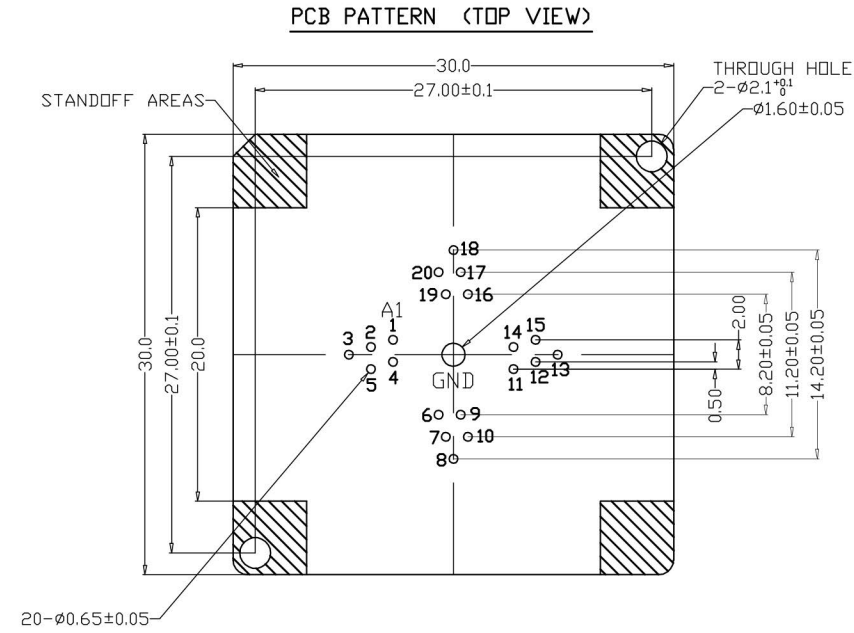
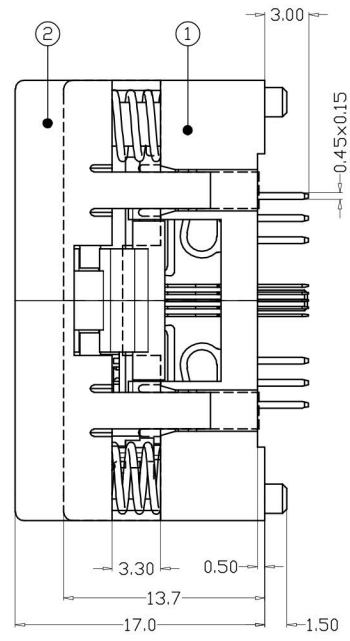


REVISION	DESCRIPTION	CHECK	APP	DATE	REV. NOTICE NO
1					
2					

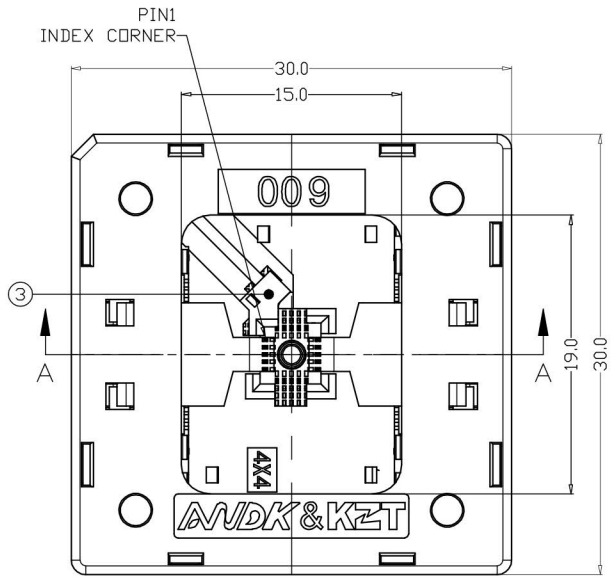


SECTION A-A



PERFORMANCE

1. Insulation Resistance: 1000 MΩ or more At 500VDC
2. Dielectric withstanding Voltage: For 1 Minute At 700VAC
3. Contact resistance: 50 mΩ or less at 10 mA and 20 mV MAX (Initial)
4. Operation Temperature: -55°C~+155°C
5. Operation Force: 2.0±0.3kg
6. Contact Force: 20-28g Per Pin
7. Current Rating: 1A max.
8. Life Span: 100,000 Times (Mechanical)

APPL ICABLE IC

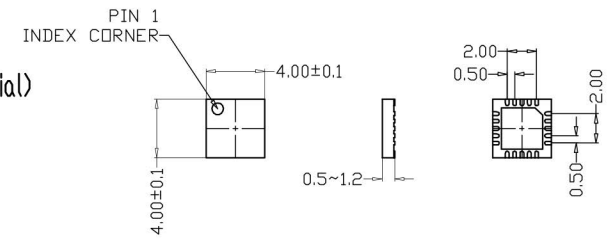

TOP VIEW SIDE VIEW BOTTOM VIEW

7	QFN-009-F05-03	CONTACT	BeCu	8	Au PLATING	TOLERANCES PROJECTION  GENERAL TOLERANCES R E V A ±0.10 TITLE QFN20-0.5-0091TGH(4x4)
6	QFN-009-F04-02	CONTACT	BeCu	8	Au PLATING	
5	QFN-009-F03-01	CONTACT	BeCu	4	Au PLATING	
4	QFN-009-F02-001	BLOCK	LOP	2	WHITE	
3	QFN-009-F01-001	BLOCK	LOP	1	WHITE	
2	QFN-009-G01-001	COVER	PEI/PES/PPS	1	BLACK	<div>X.X ±0.25</div> <div>APP:</div> <div>DATE:</div> <div rowspan="3"><div>ANDK & KZT</div></div>
1	QFN-009-U01-001	BASE	LOP	1	WHITE	X.XX ±0.10 CHECK: DATE:
No	Part Number	Name	Material	Q/ty	Note	X.XXX±0.05 DEGK: DATE: