
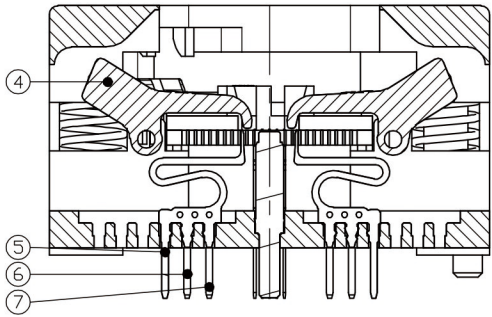
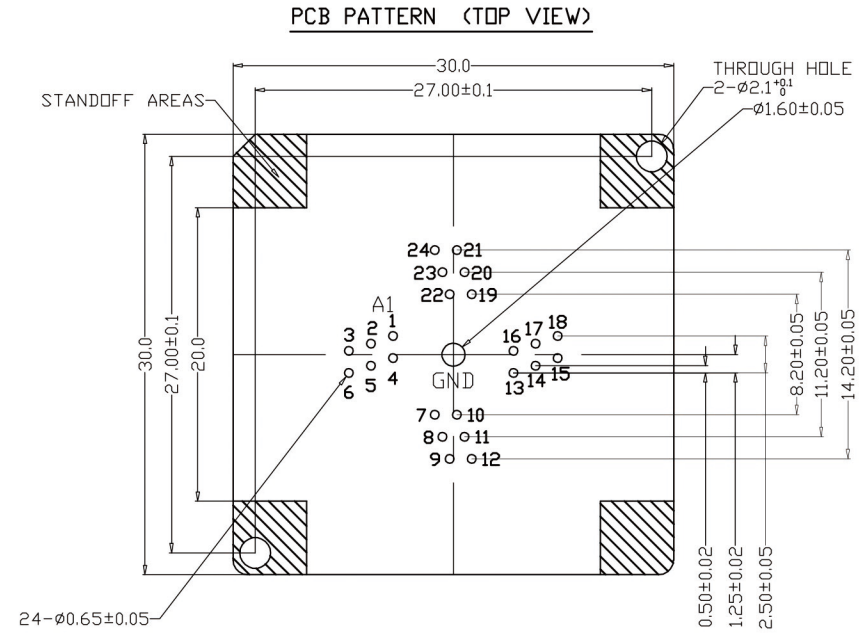
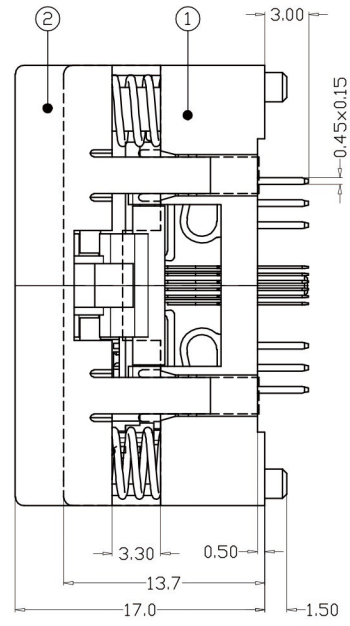


REVISION	DESCRIPTION	CHECK	APP	DATE	REV. NOTICE NO
1					
2					

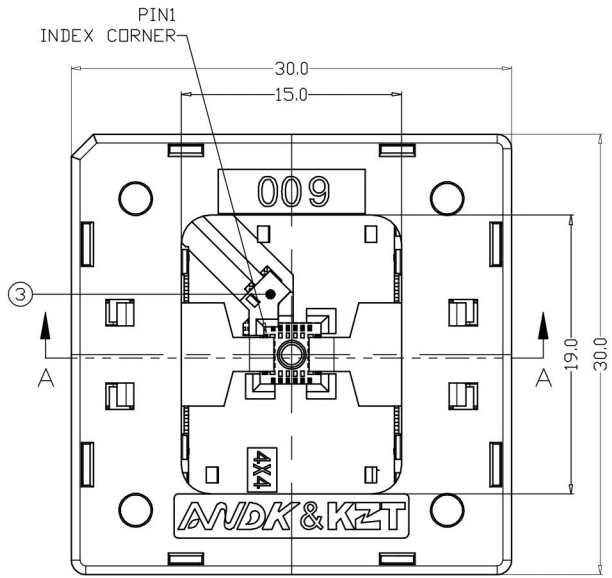


SECTION A-A

PERFORMANCE

1. Insulation Resistance: 1000 MΩ or more At 500VDC
2. Dielectric withstanding Voltage: For 1 Minute At 700VAC
3. Contact resistance: 50 mΩ or less at 10 mA and 20 mV MAX (Initial)
4. Operation Temperature: -55°C~+155°C
5. Operation Force: 2.0±0.3kg
6. Contact Force: 20-28g Per Pin
7. Current Rating: 1A max.
8. Life Span: 100,000 Times (Mechanical)


APPL ICABLE IC

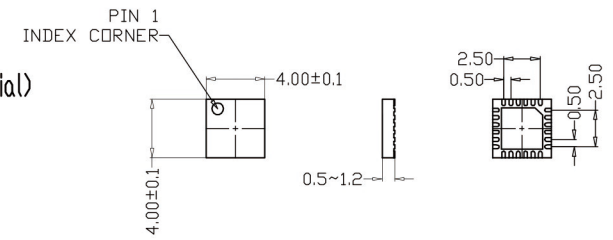

TOP VIEW

SIDE VIEW

BOTTOM VIEW



7	QFN-009-F05-03	CONTACT	BeCu	8	Au PLATING	TOLERANCES	PROJECTION	GENERAL TOLERANCES	±0.10	TITLE	QFN24-0.5-0092TGH(4x4)
6	QFN-009-F04-02	CONTACT	BeCu	8	Au PLATING	R	E	V	A	CLASS	
5	QFN-009-F03-01	CONTACT	BeCu	8	Au PLATING	X.	±0.50	DIMENSION: mm	SCALE: 1:1	DRW.NO	
4	QFN-009-F02-001	BLOCK	LCP	2	WHITE	X.X	±0.25	APP:	DATE:		
3	QFN-009-F01-001	BLOCK	LCP	1	WHITE	X.XX	±0.10	CHECK:	DATE:		
2	QFN-009-G01-001	COVER	PEI/PES/PPS	1	BLACK	X.XXX	±0.05	DEGK:	DATE:		
1	QFN-009-U01-001	BASE	LCP	1	WHITE						
No	Part Number	Name	Material	Q/ty	Note						

AVDK & KZT