

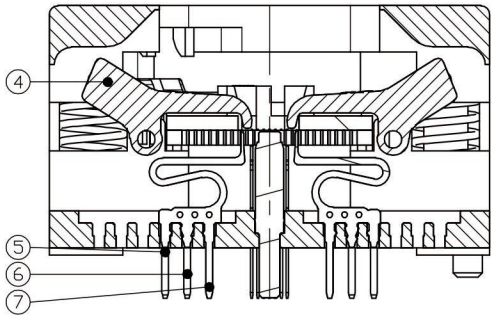
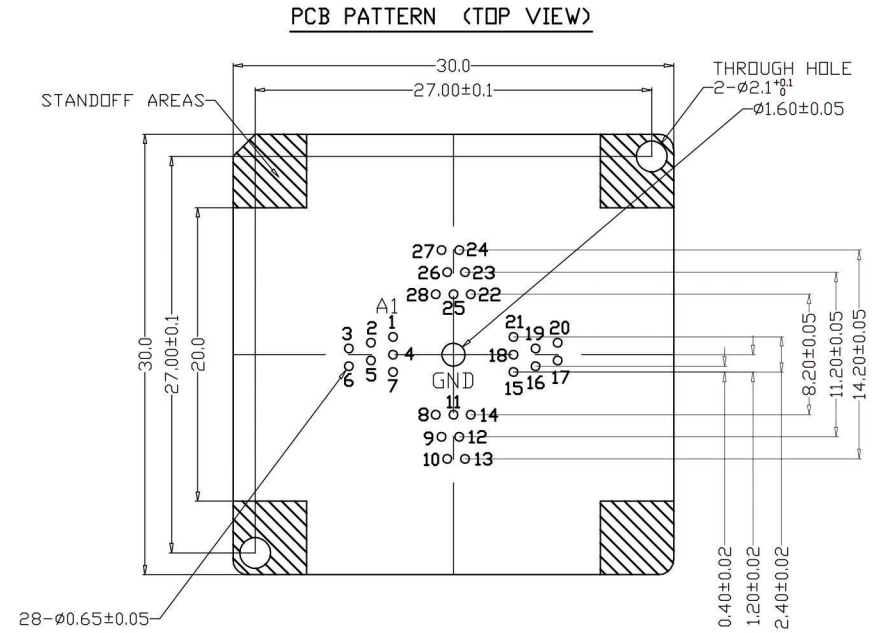
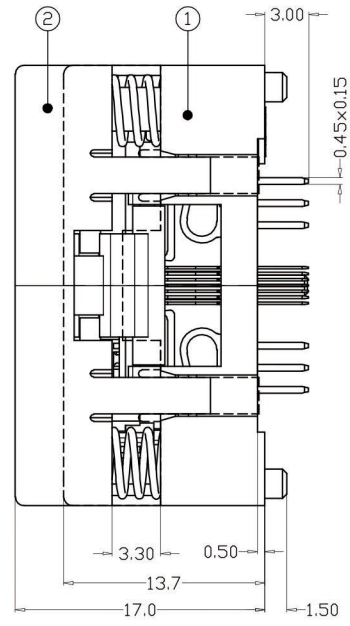


REVISION	DESCRIPTION	CHECK	APP	DATE	REV. NOTICE NO
1					
2					

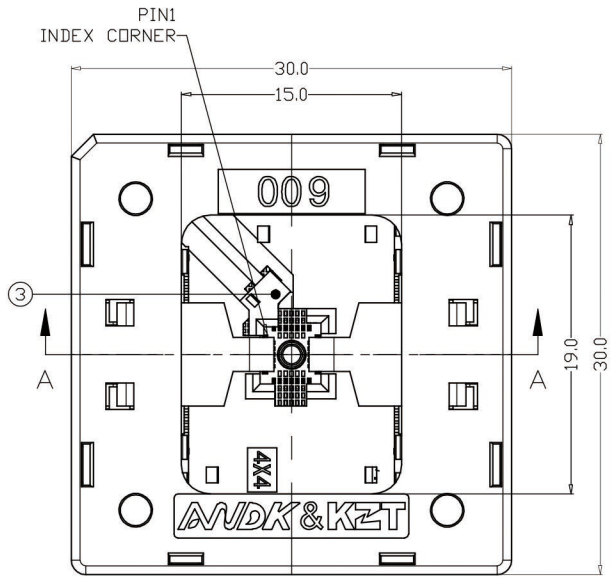


SECTION A-A



PERFORMANCE

1. Insulation Resistance: 1000 MΩ or more At 500VDC
2. Dielectric withstanding Voltage: For 1 Minute At 700VAC
3. Contact resistance: 50 mΩ or less at 10 mA and 20 mV MAX (Initial)
4. Operation Temperature: -55°C~+155°C
5. Operation Force: 2.0±0.3kg
6. Contact Force: 20-28g Per Pin
7. Current Rating: 1A max.
8. Life Span: 100,000 Times (Mechanical)

APPL ICABLE IC

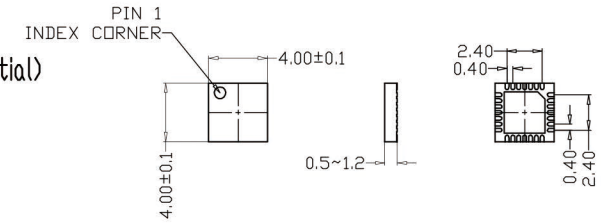

TOP VIEW SIDE VIEW BOTTOM VIEW

7	QFN-009-F05-03	CONTACT	BeCu	12	Au PLATING	TOLERANCES	PROJECTION	GENERAL TOLERANCES	±0.10	TITLE	QFN28-0.4-0091TGH(4x4)
6	QFN-009-F04-02	CONTACT	BeCu	8	Au PLATING	X. ±0.50	DIMENSION: mm	R E V	SCALE: 1:1	CLASS	
5	QFN-009-F03-01	CONTACT	BeCu	8	Au PLATING	X.X ±0.25	APP:	DATE:		DRW.NO	
4	QFN-009-F02-001	BLOCK	LCP	2	WHITE	X.XX ±0.10	CHECK:	DATE:			
3	QFN-009-F01-001	BLOCK	LCP	1	WHITE	X.XXX±0.05	DEGK:	DATE:			
2	QFN-009-G01-001	COVER	PEI/PES/PPS	1	BLACK						
1	QFN-009-U01-001	BASE	LCP	1	WHITE						
No	Part Number	Name	Material	Q/ty	Note						

ANDK & KZT