

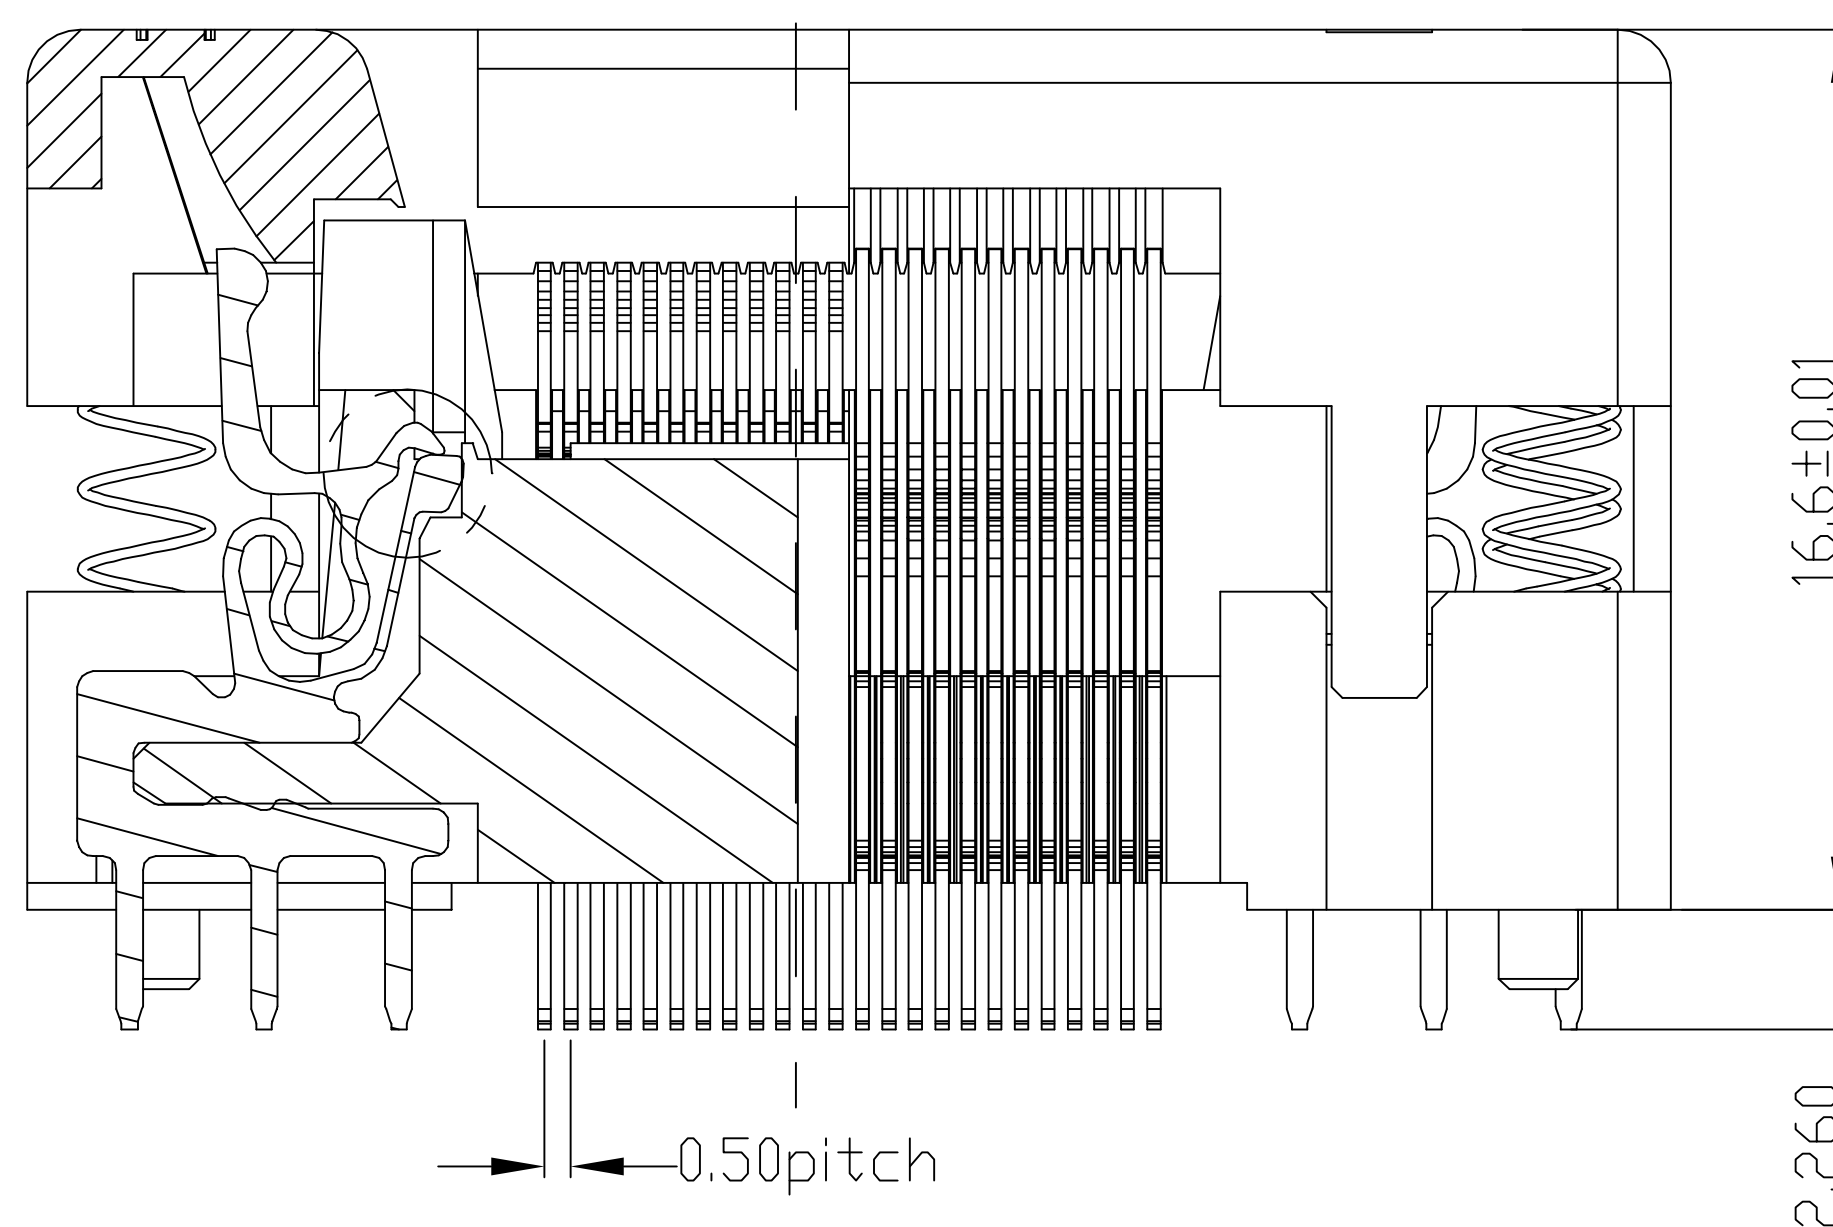
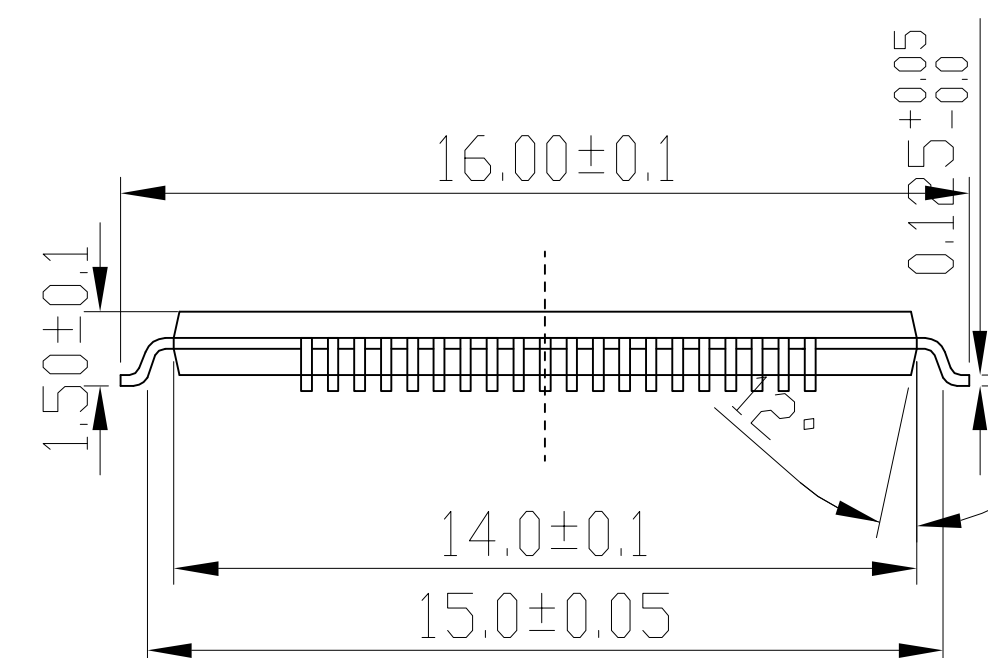
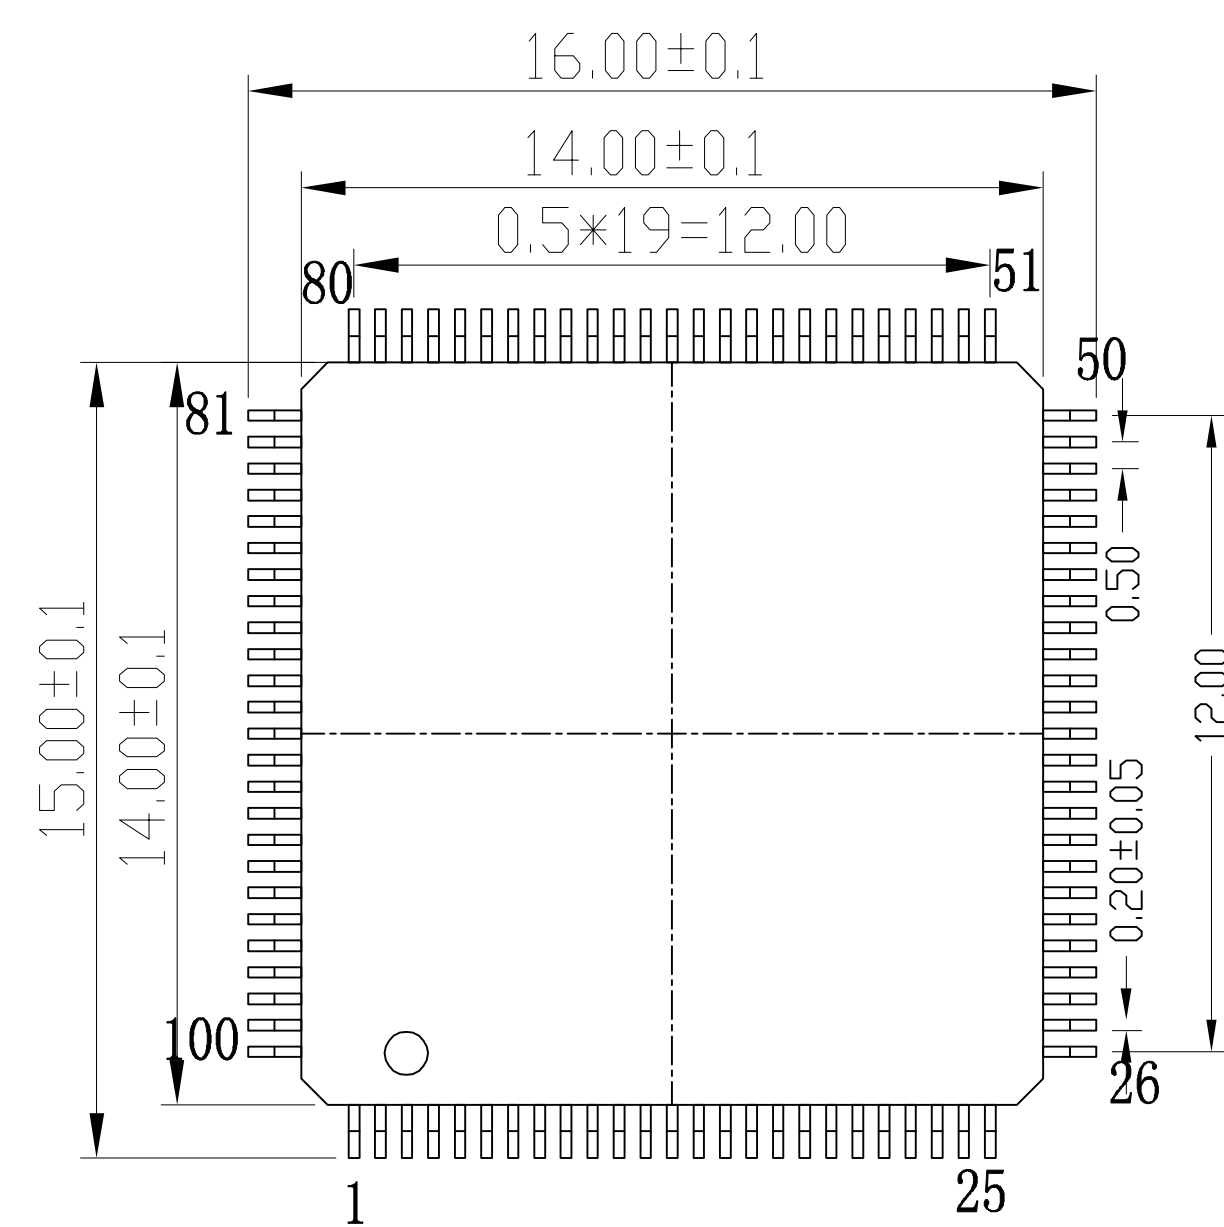



	REVISION DESCRIPTION	CHECK	APP	DATE	REV.NOTICE.NO
△ 1					
△ 2					
△ 3					

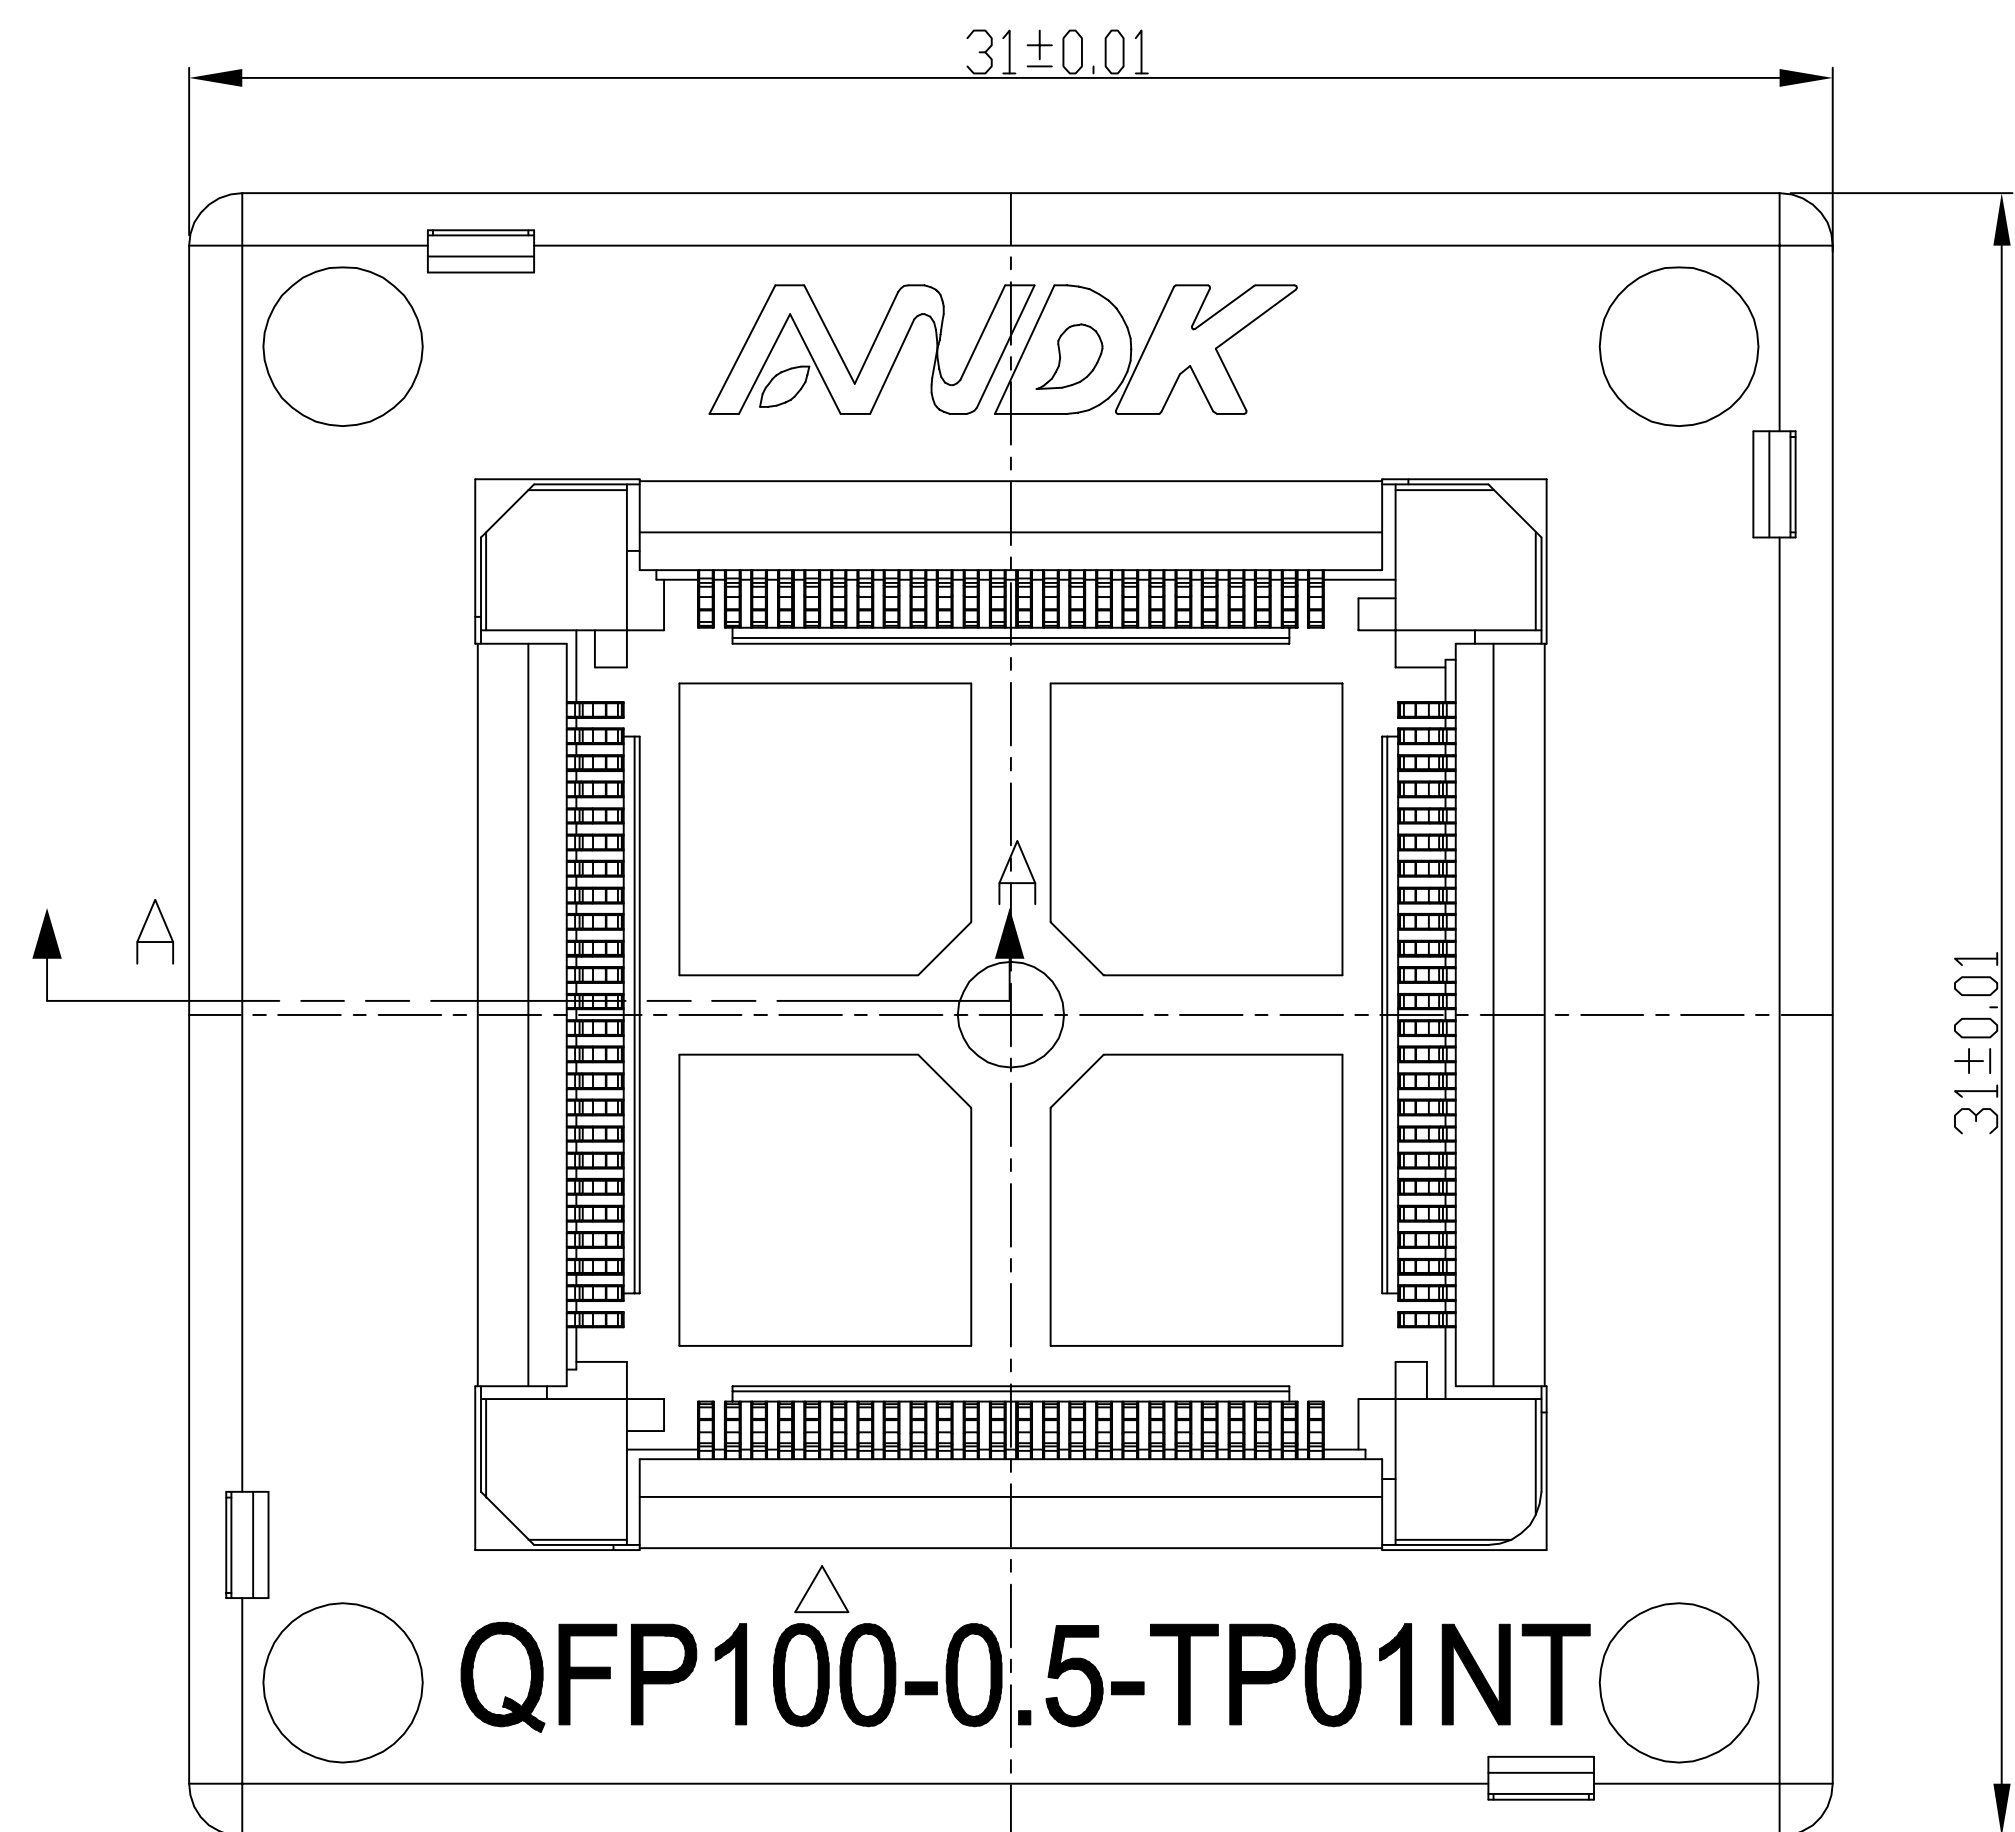


截面 A-A

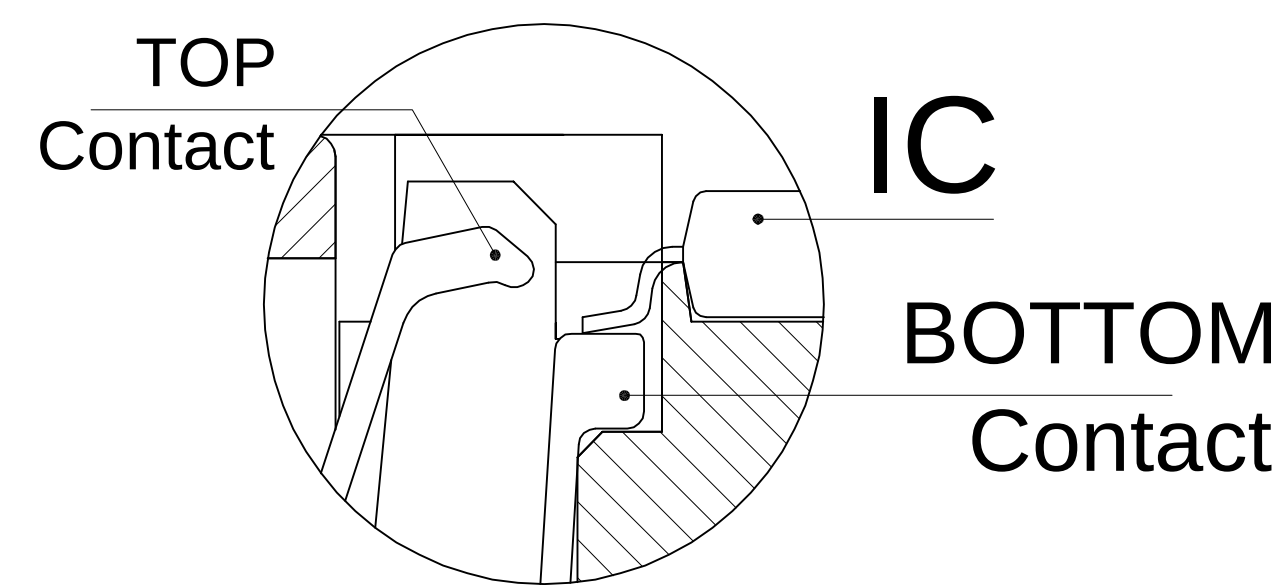



CONTACT TIP DETAIL

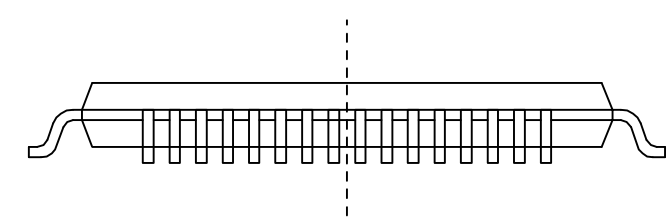

↓ Insertion

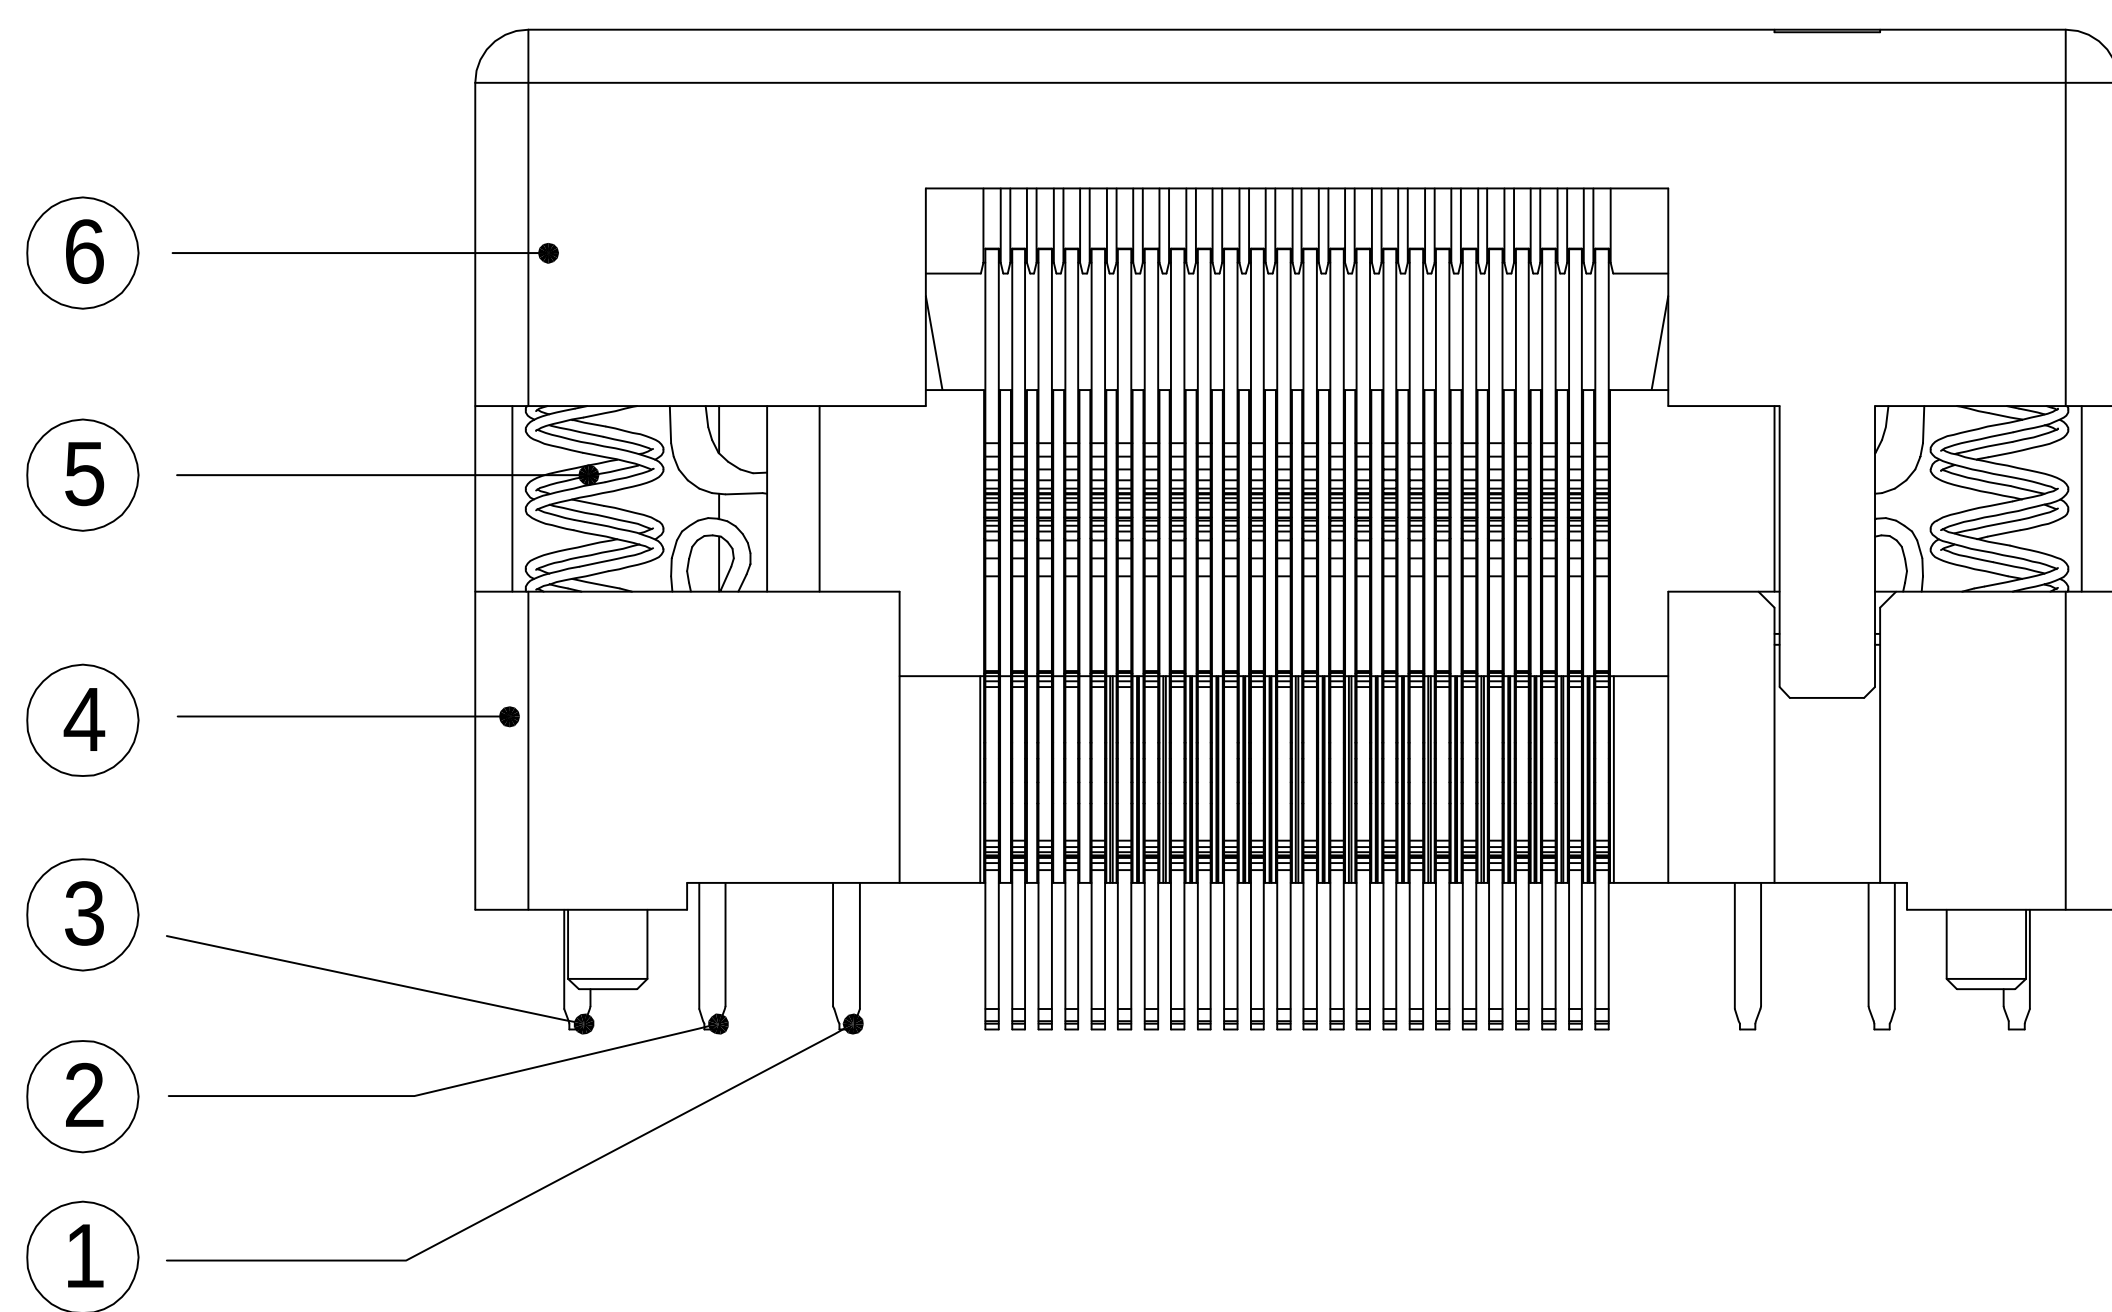


CONTACT LEAD
W0.45XT0.25

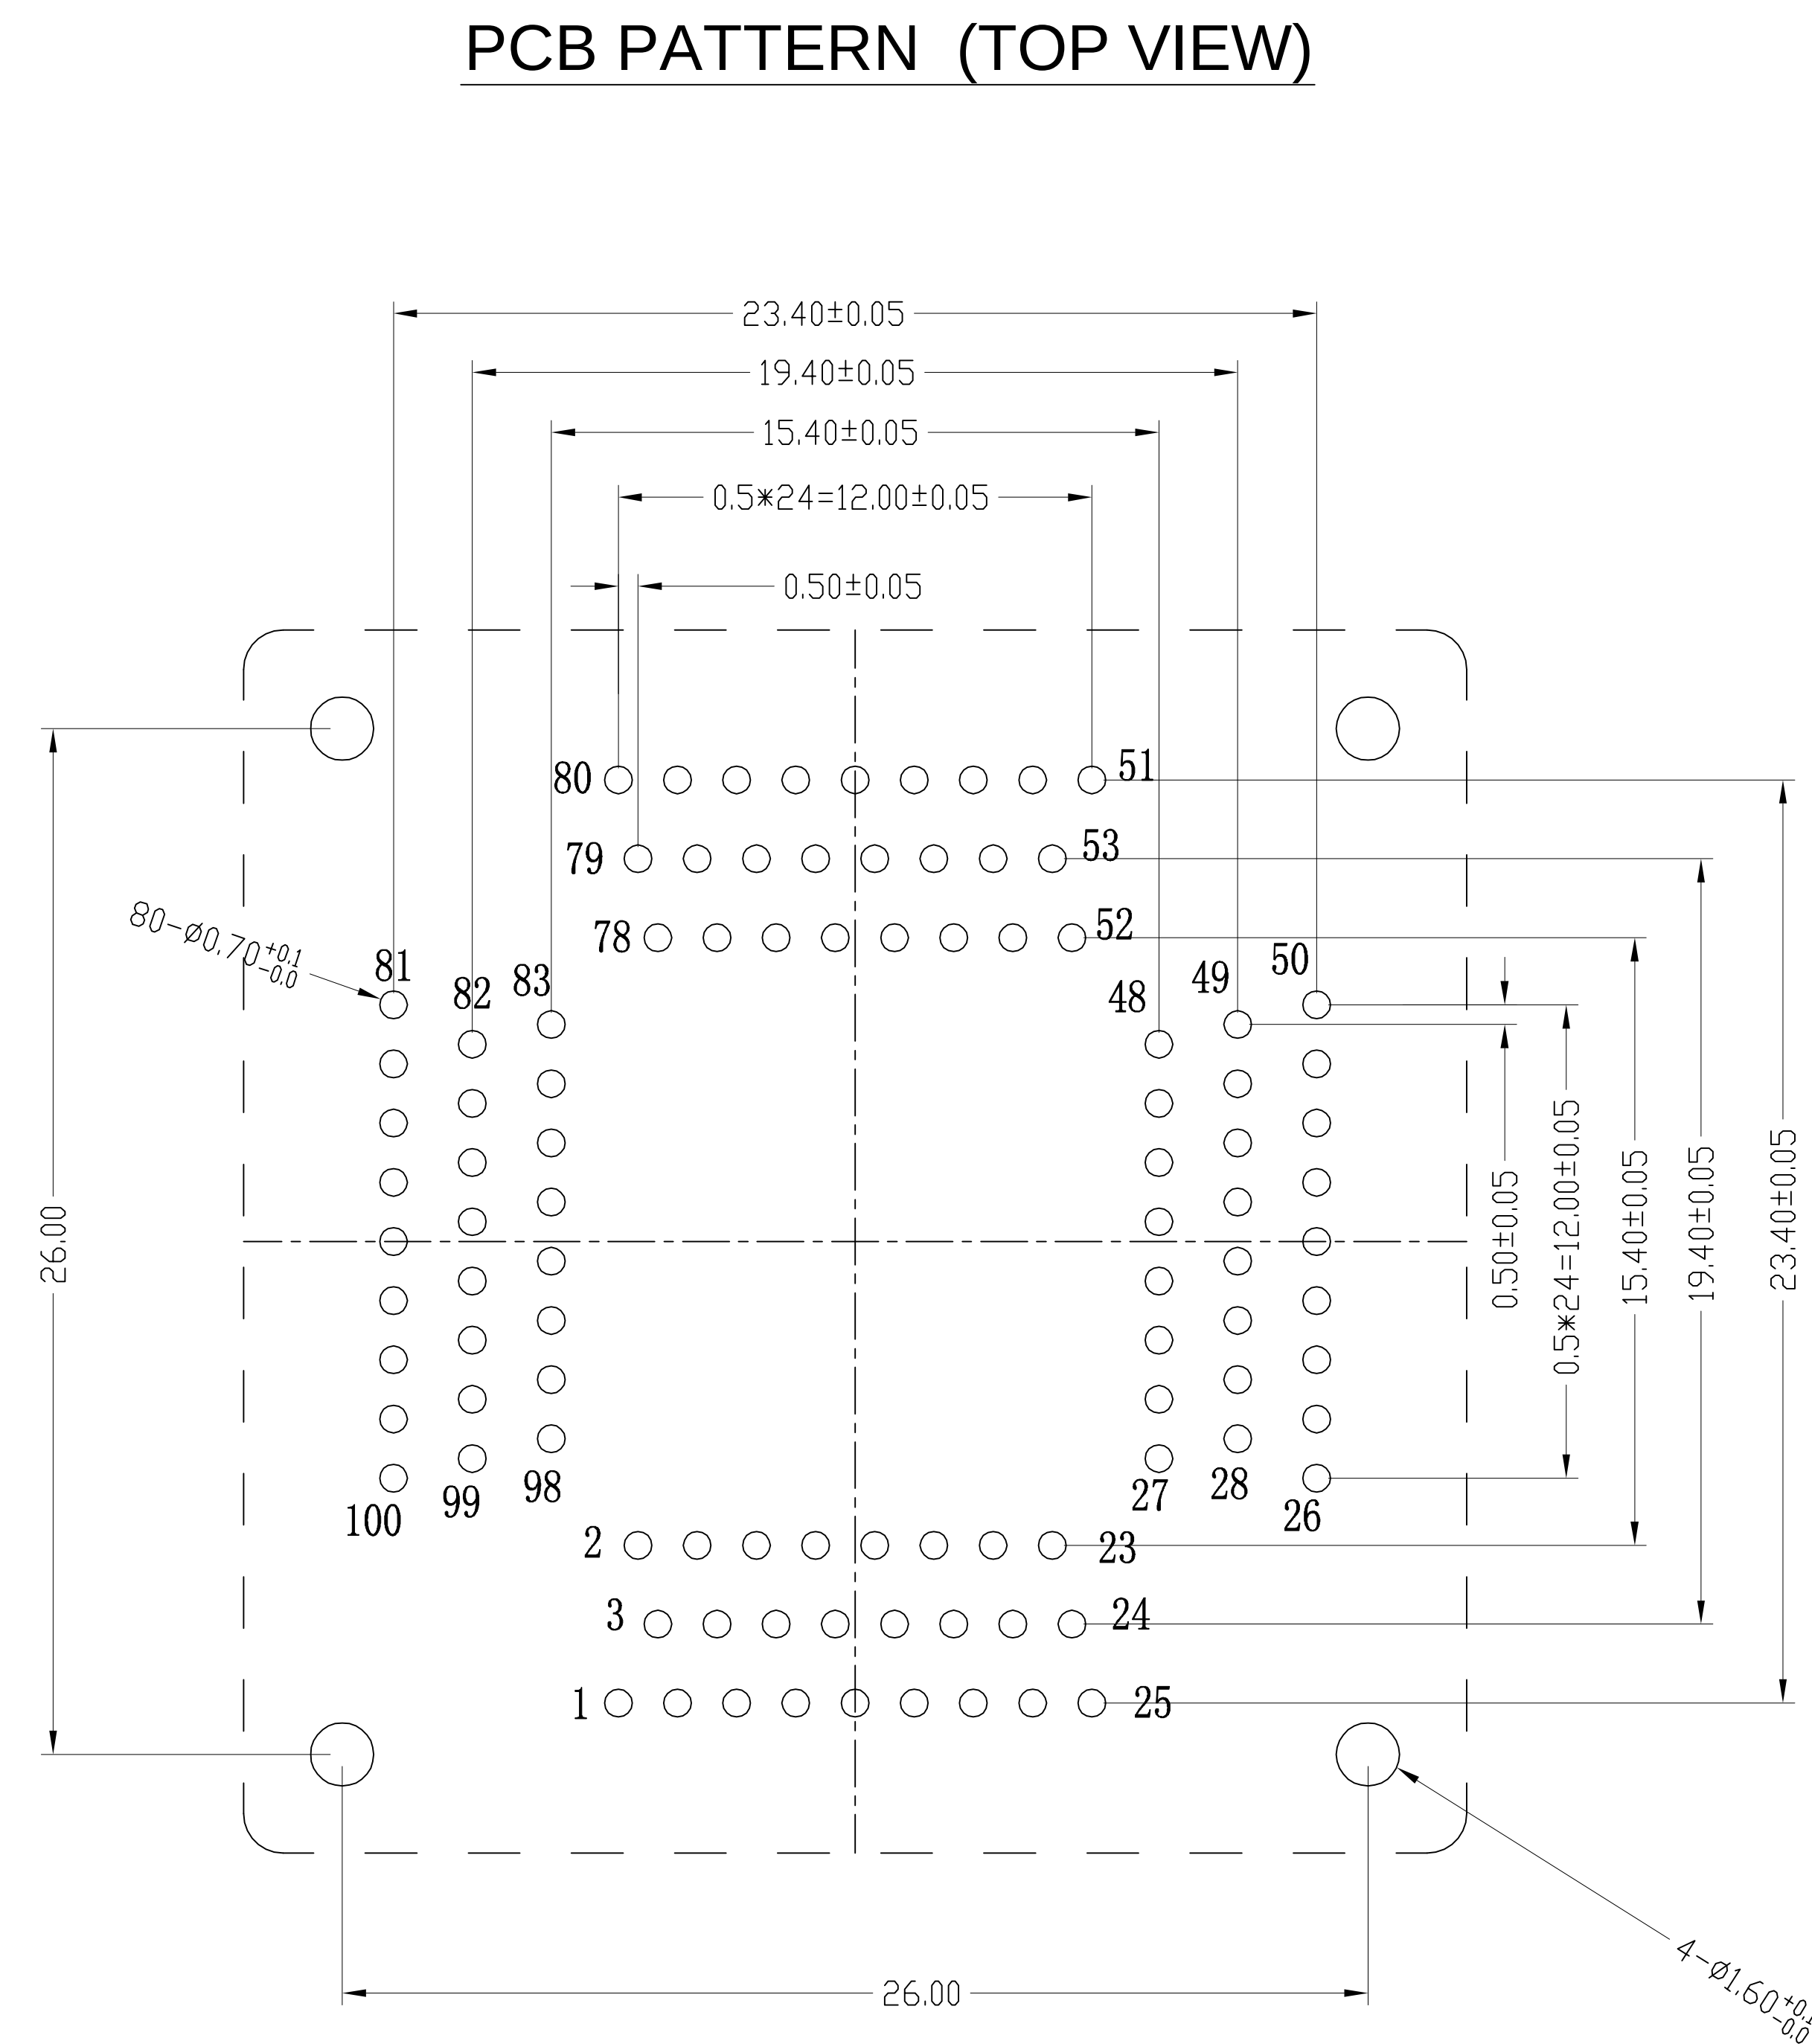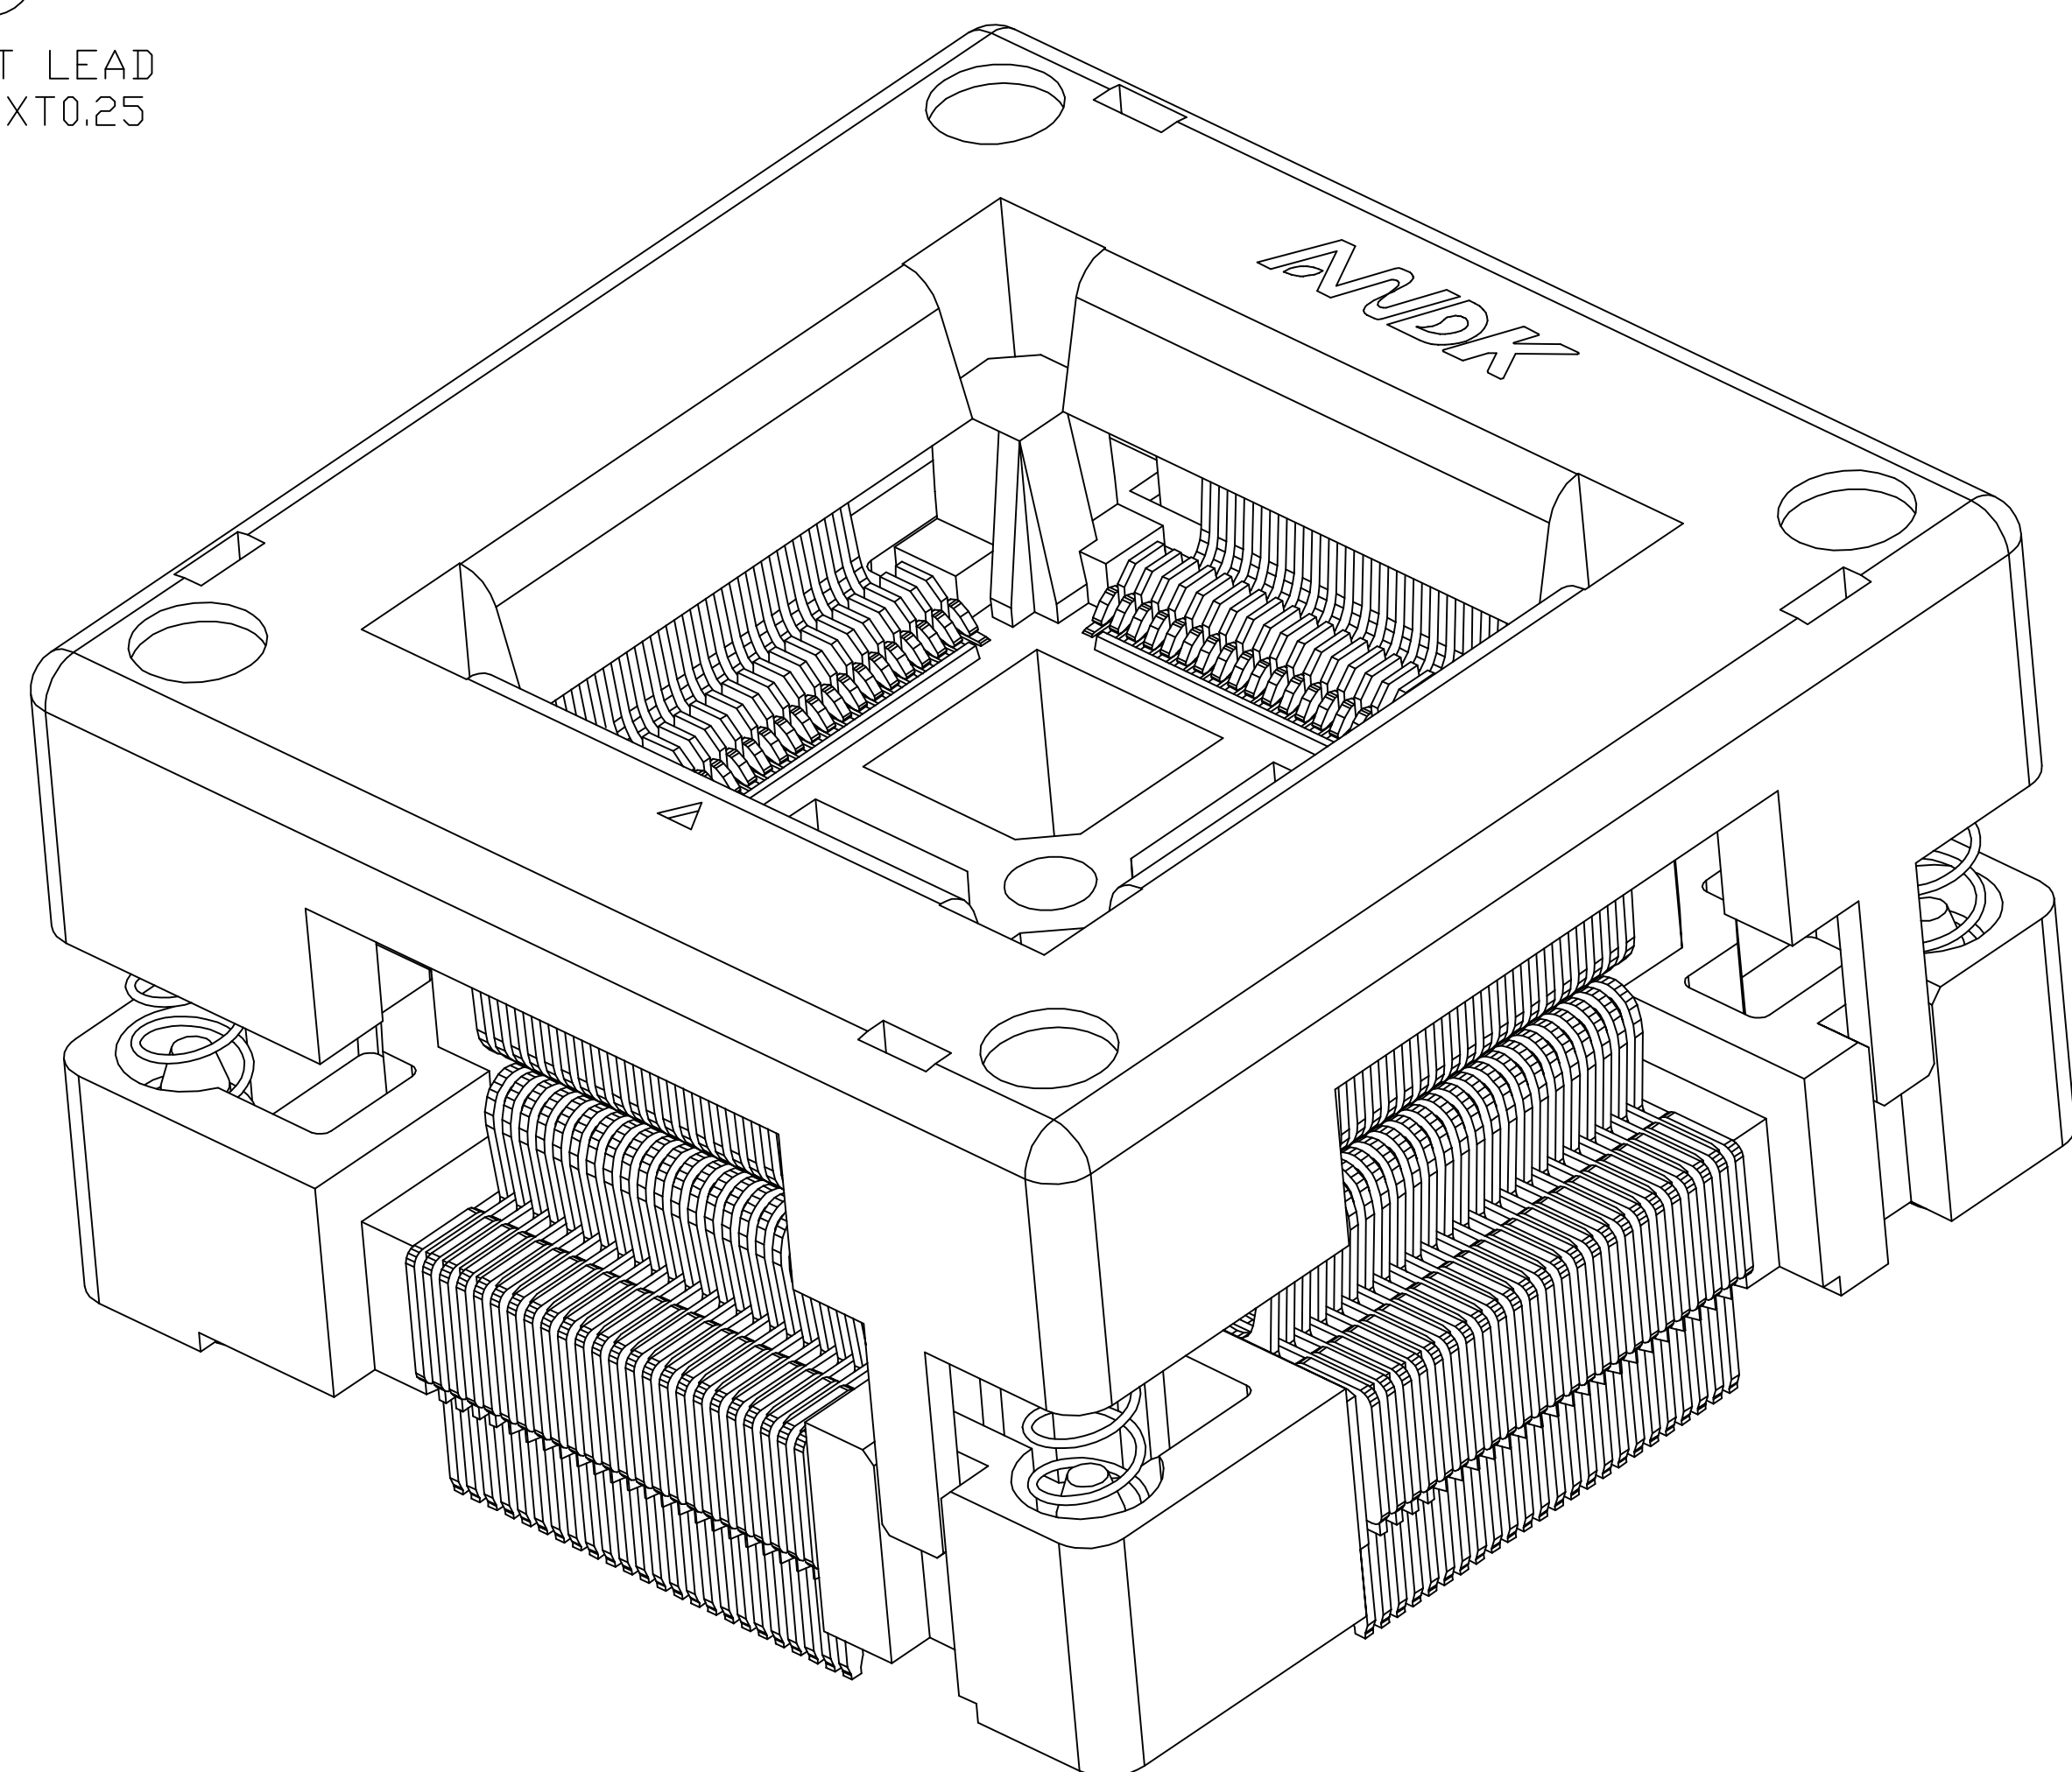

PERFORMANCE

- 1、Insulation Resistance: 1000M Ω Min.At DC 500V
- 2、Dielectric Withstanding Voltage For 1 Minute At AC500V
- 3、Contact Resistance(Initial) 100m Ω MAX at 10mA
- 4、Rated Current: 1.0A.
- 5、Operation Temperature range -65°C ~+150°C
- 6、Terminal strength against pulling 0.5Kg(1min)
- 7、Insertion Min10000 cycle (Mechanical)
- 8、Material: Body:PAI,PES; Contact:BeCu,Au plating(Ni-base)

6	QFP64-0.5-XCR	COVER	PEI/PES	1	BLACK
5	30-B-4515X	SPRING	SUS	4	FOR COVER
4	QFP64-0.5-XBY	BODY	PEI/PES	1	BLACK
3	QFP64-0.5-XCTC	CONTACT	BeCu	36	FOR COVER
2	QFP64-0.5-XCTB	CONTACT	BeCu	32	BLACK
1	QFP64-0.5-XCTA	CONTACT	BeCu	32	Au PLATING
No	Part Number	Name	Material	Q/ty	Note

TOLERANCE	PROJECTION		GENERAL TOLERANCES	± 0.10	TITLE	QFP100-0.5 SOCKET
			R E V	A	CLASS	QFP100-0.5-TP01NT
X. ± 0.50	DIMENSION:	mm	SCALE:	1:1	DRW.NO	04
X.X ± 0.25	APP:		DATE:			
X.XX ± 0.10	CHECK:		DATE:			
X.XXX ± 0.05	DECK:	ENG03	DATE:	20150606		