

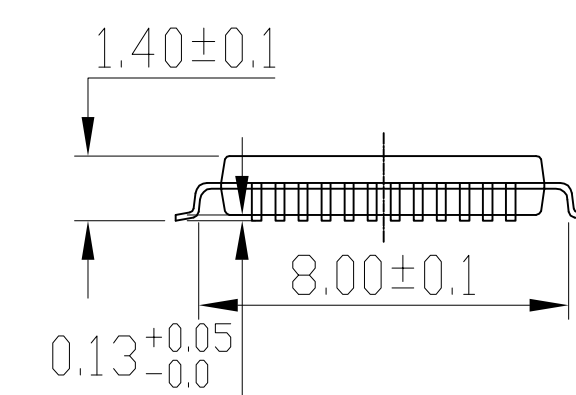


X	REVISION DESCRIPTION	CHECK	APP	DATE	REV.NO	NOTICE NO.
△ 1						
△ 2						
△ 3						




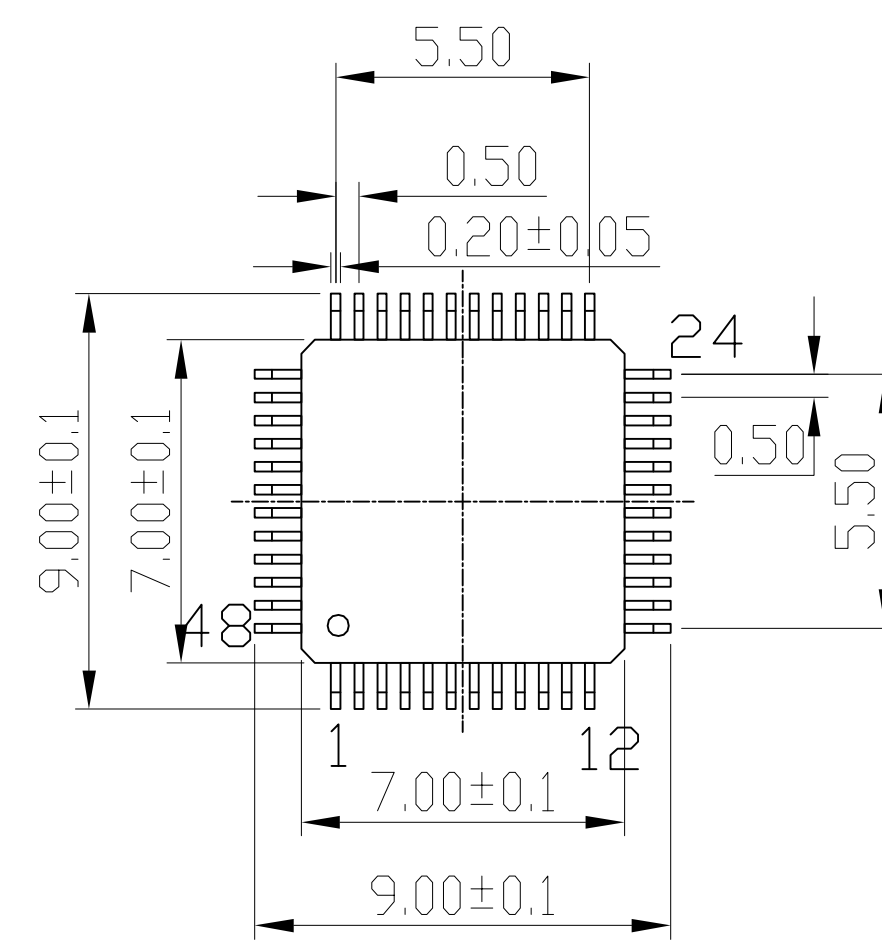


PCB PATTERN (TOP VIEW)

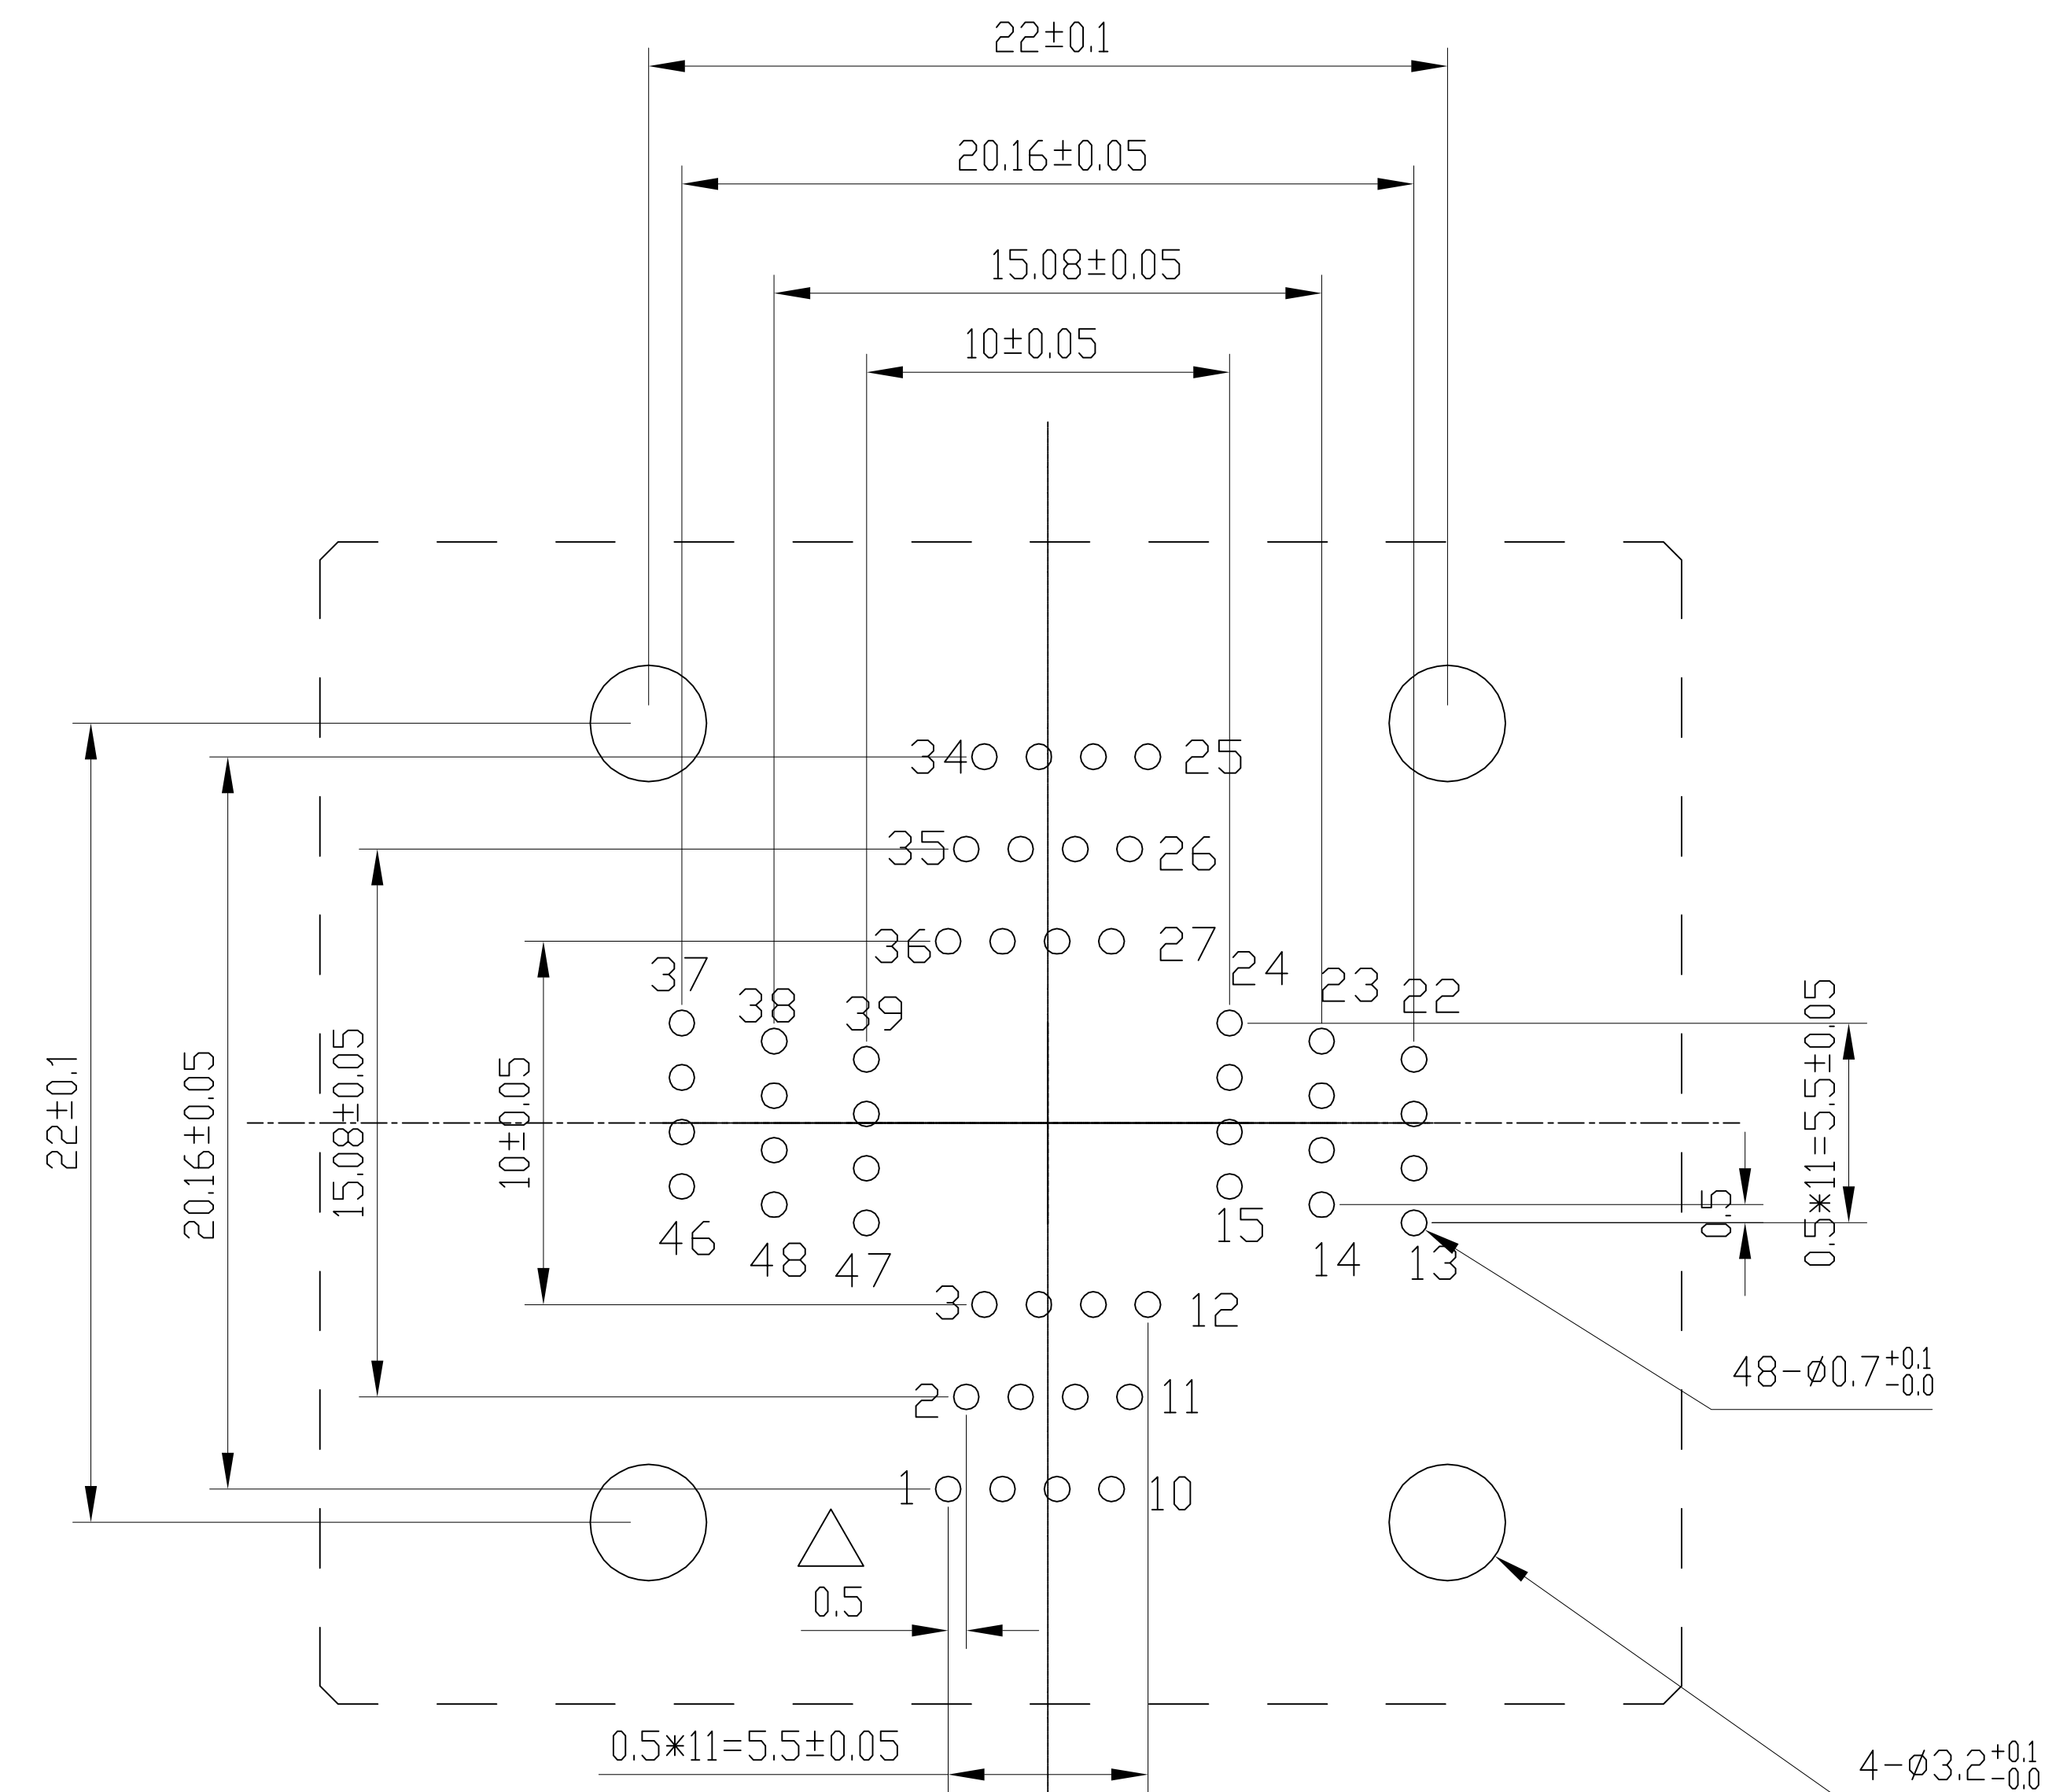

PERFORMANCE

- 1、Insulation Resistance: 1000M Ω Min.At DC 500V
- 2、Dielectric Withstanding Voltage For 1 Minute At AC500V
- 3、Contact Resistance(Initial) 30m Ω MAX at 10mA
- 4、Rated Current: 1.0A.
- 5、Operation Temperature range -65°C ~+150°C
- 6、Insertion Min10000 cycle (Mechanical)
- 7、Material: Body:PAI,PES; Contact:BeCu,Au plating(Ni-base)

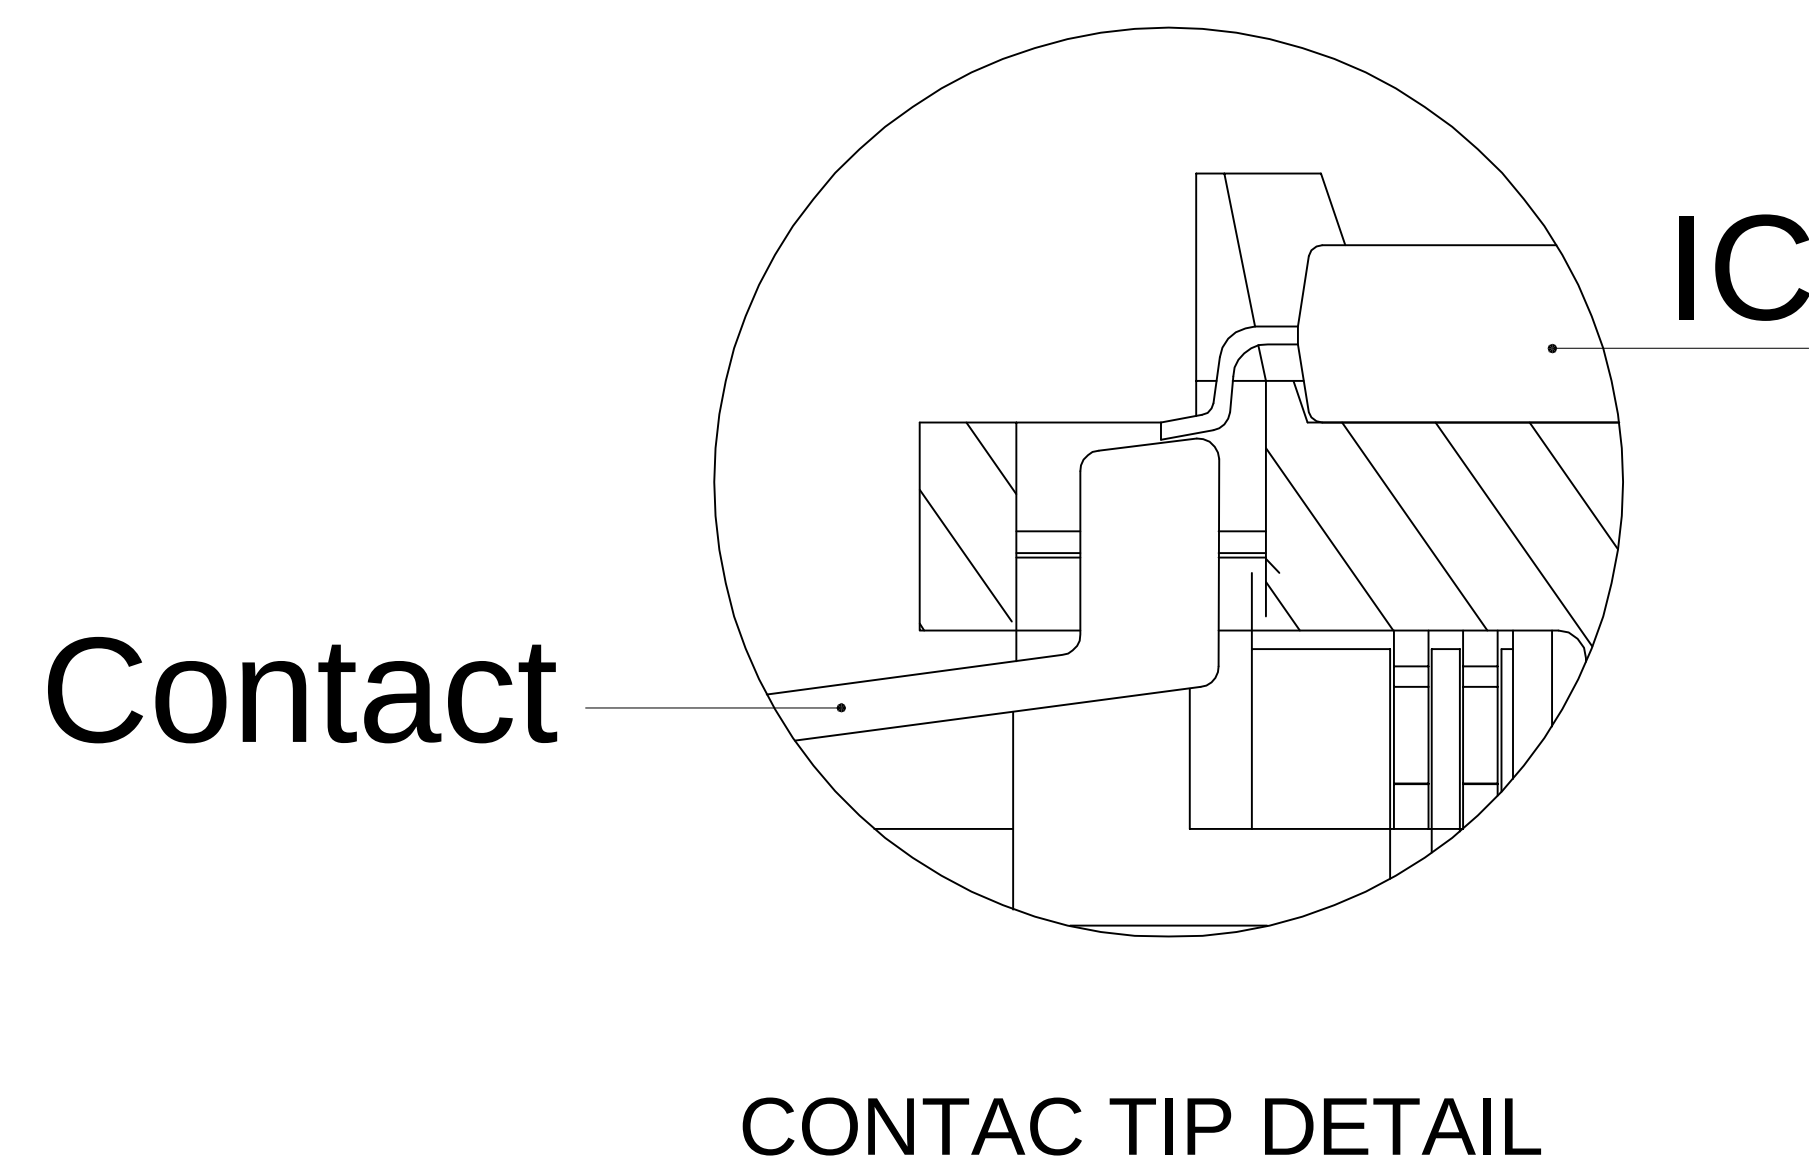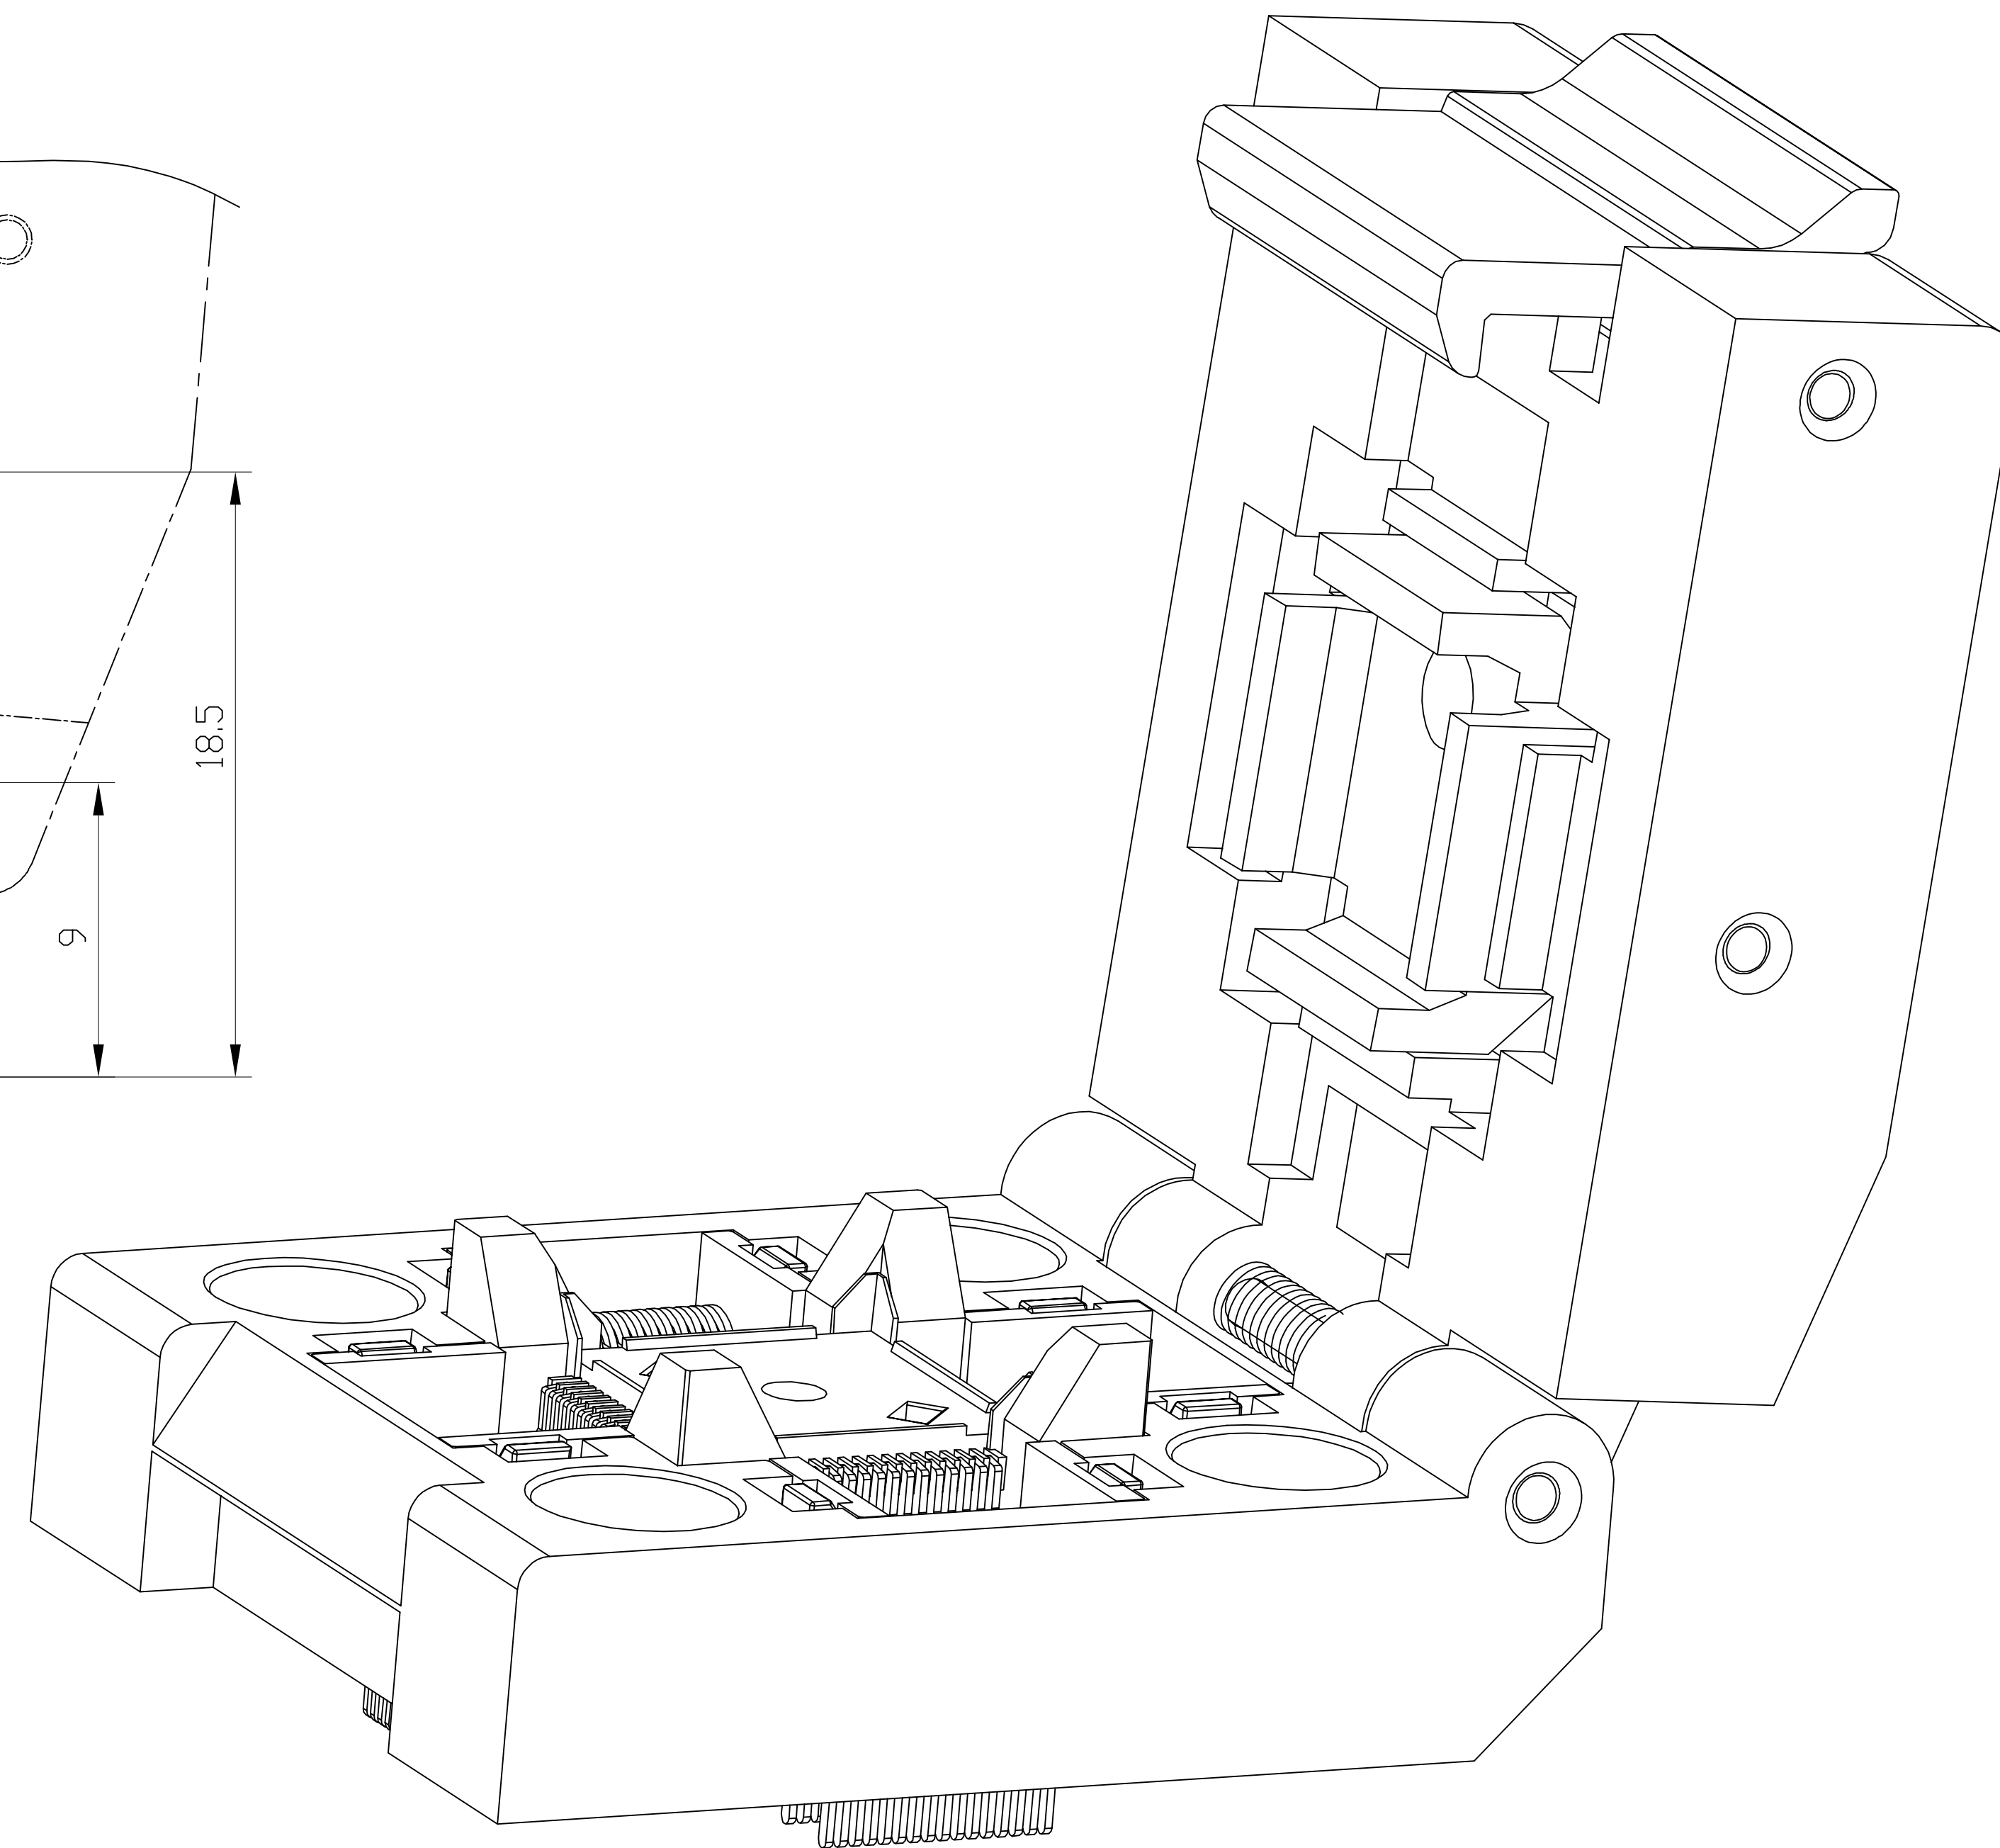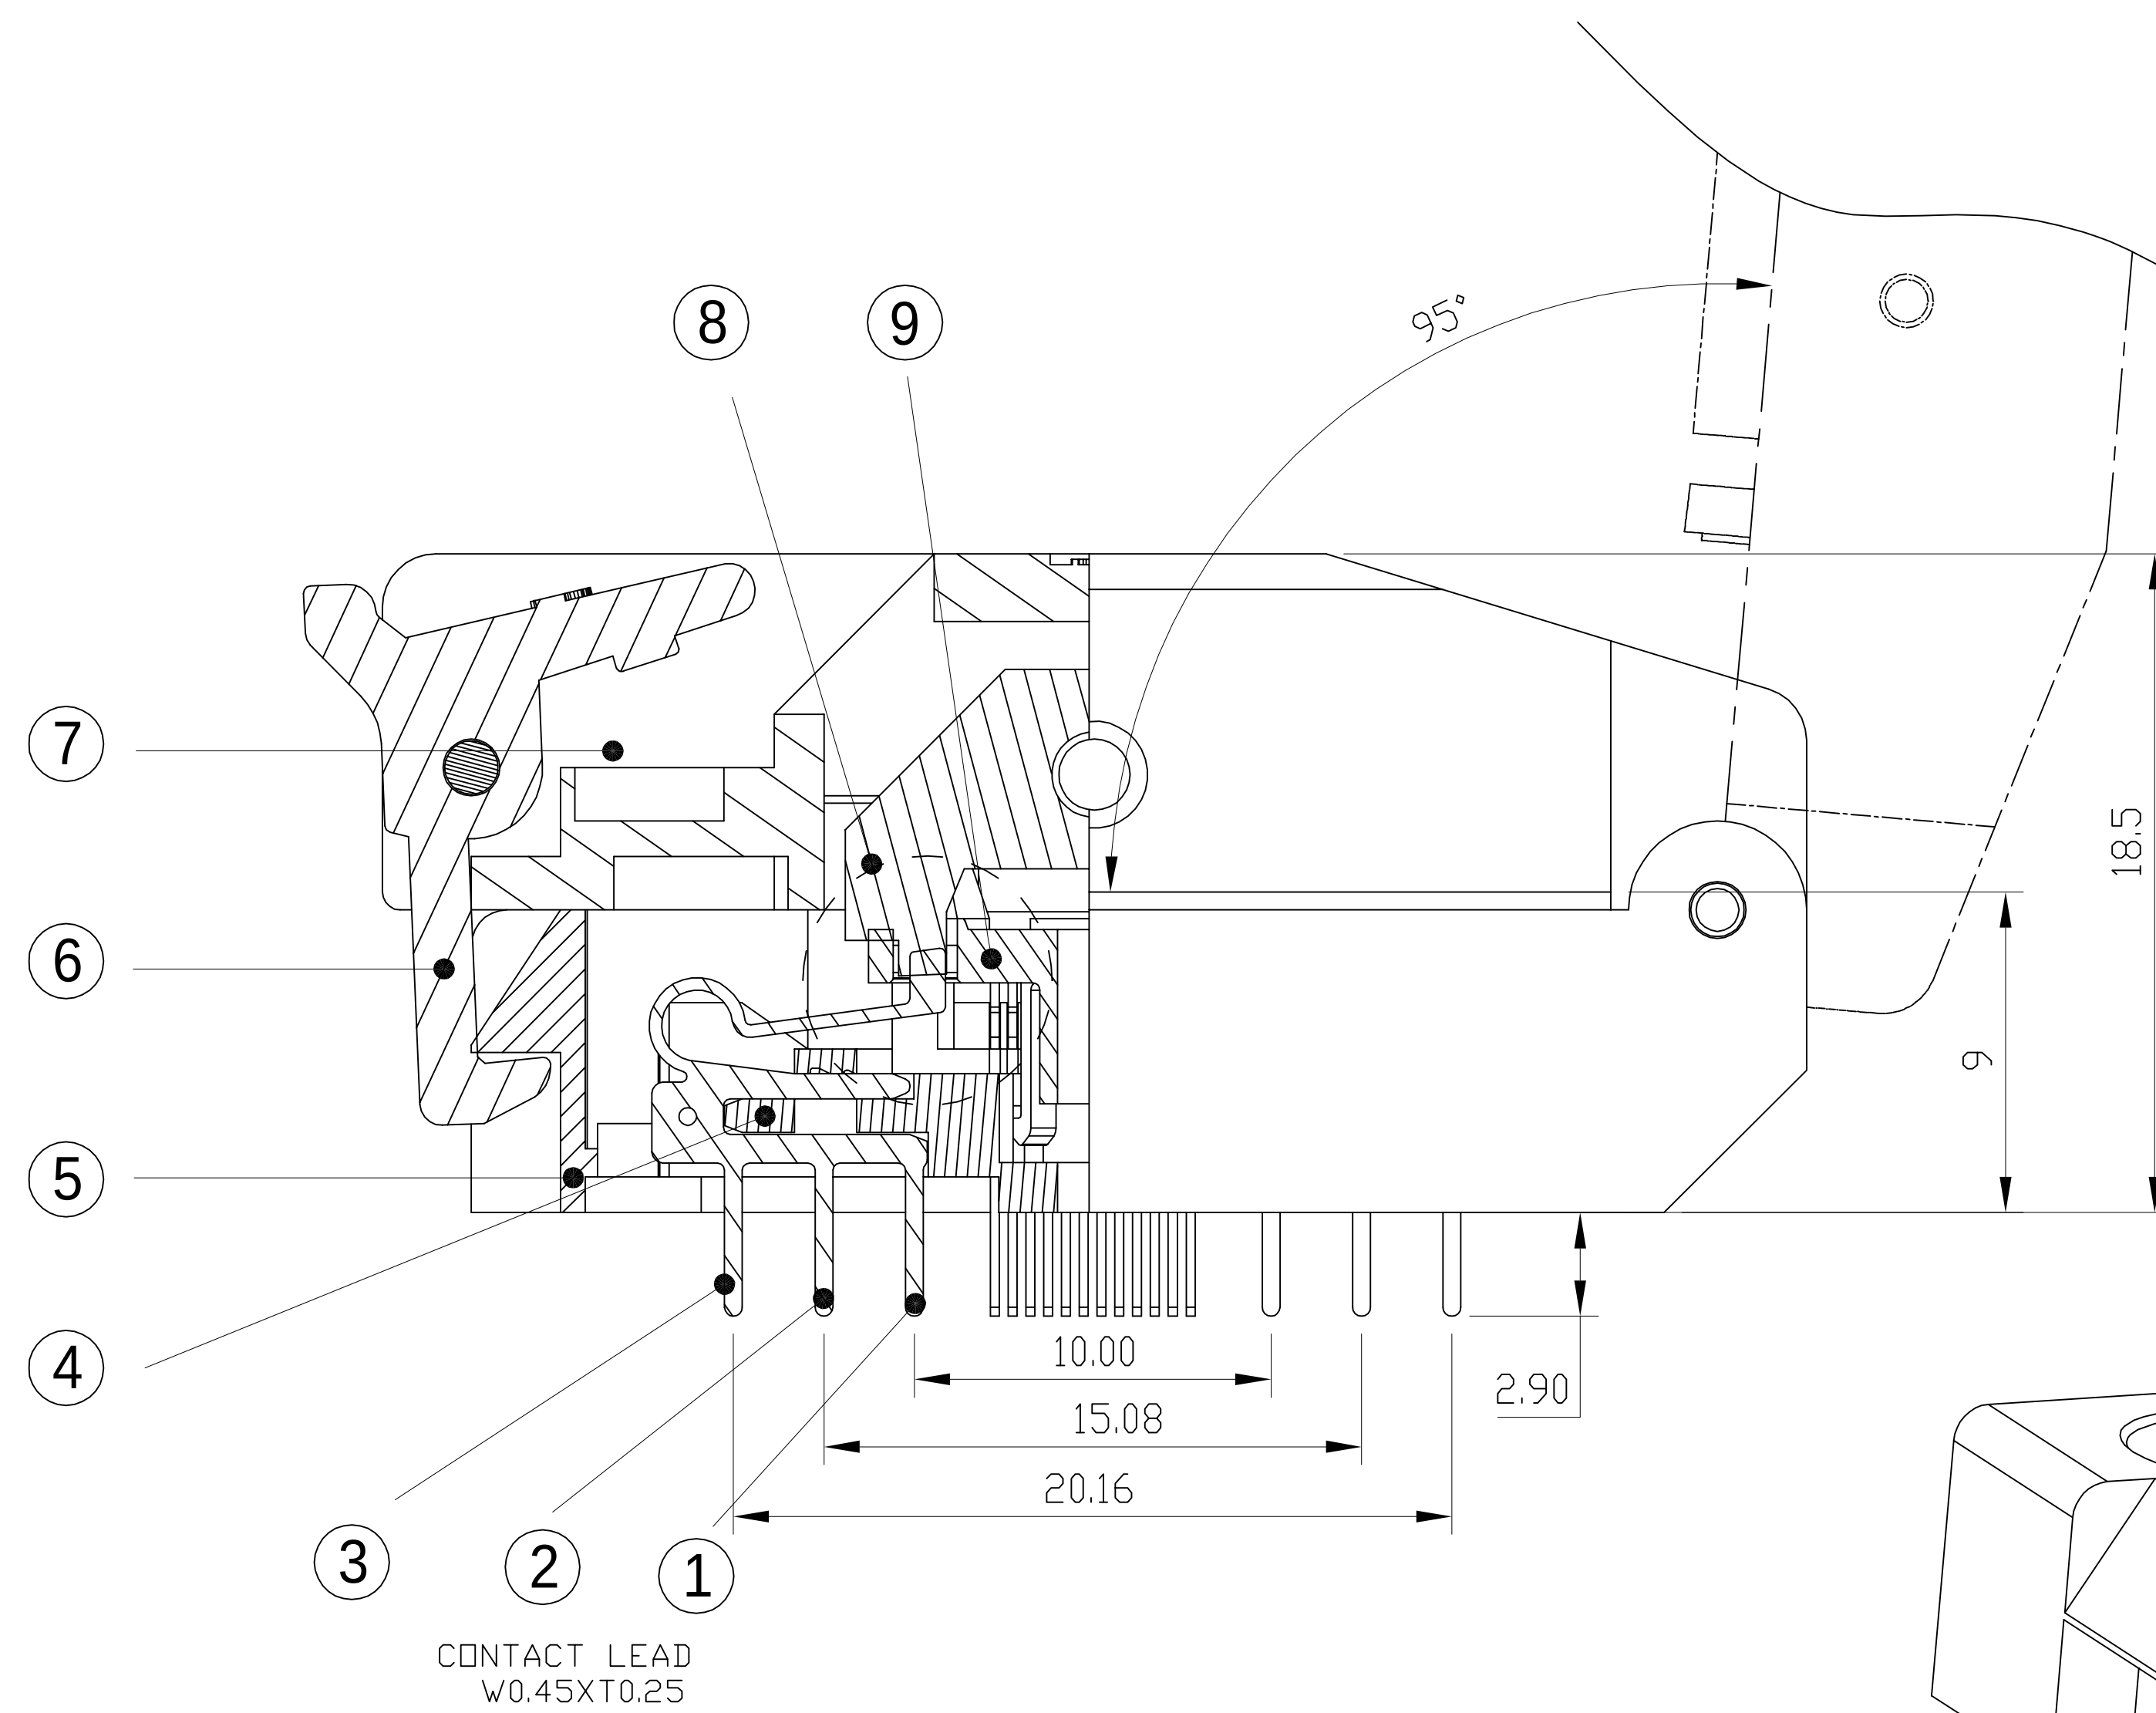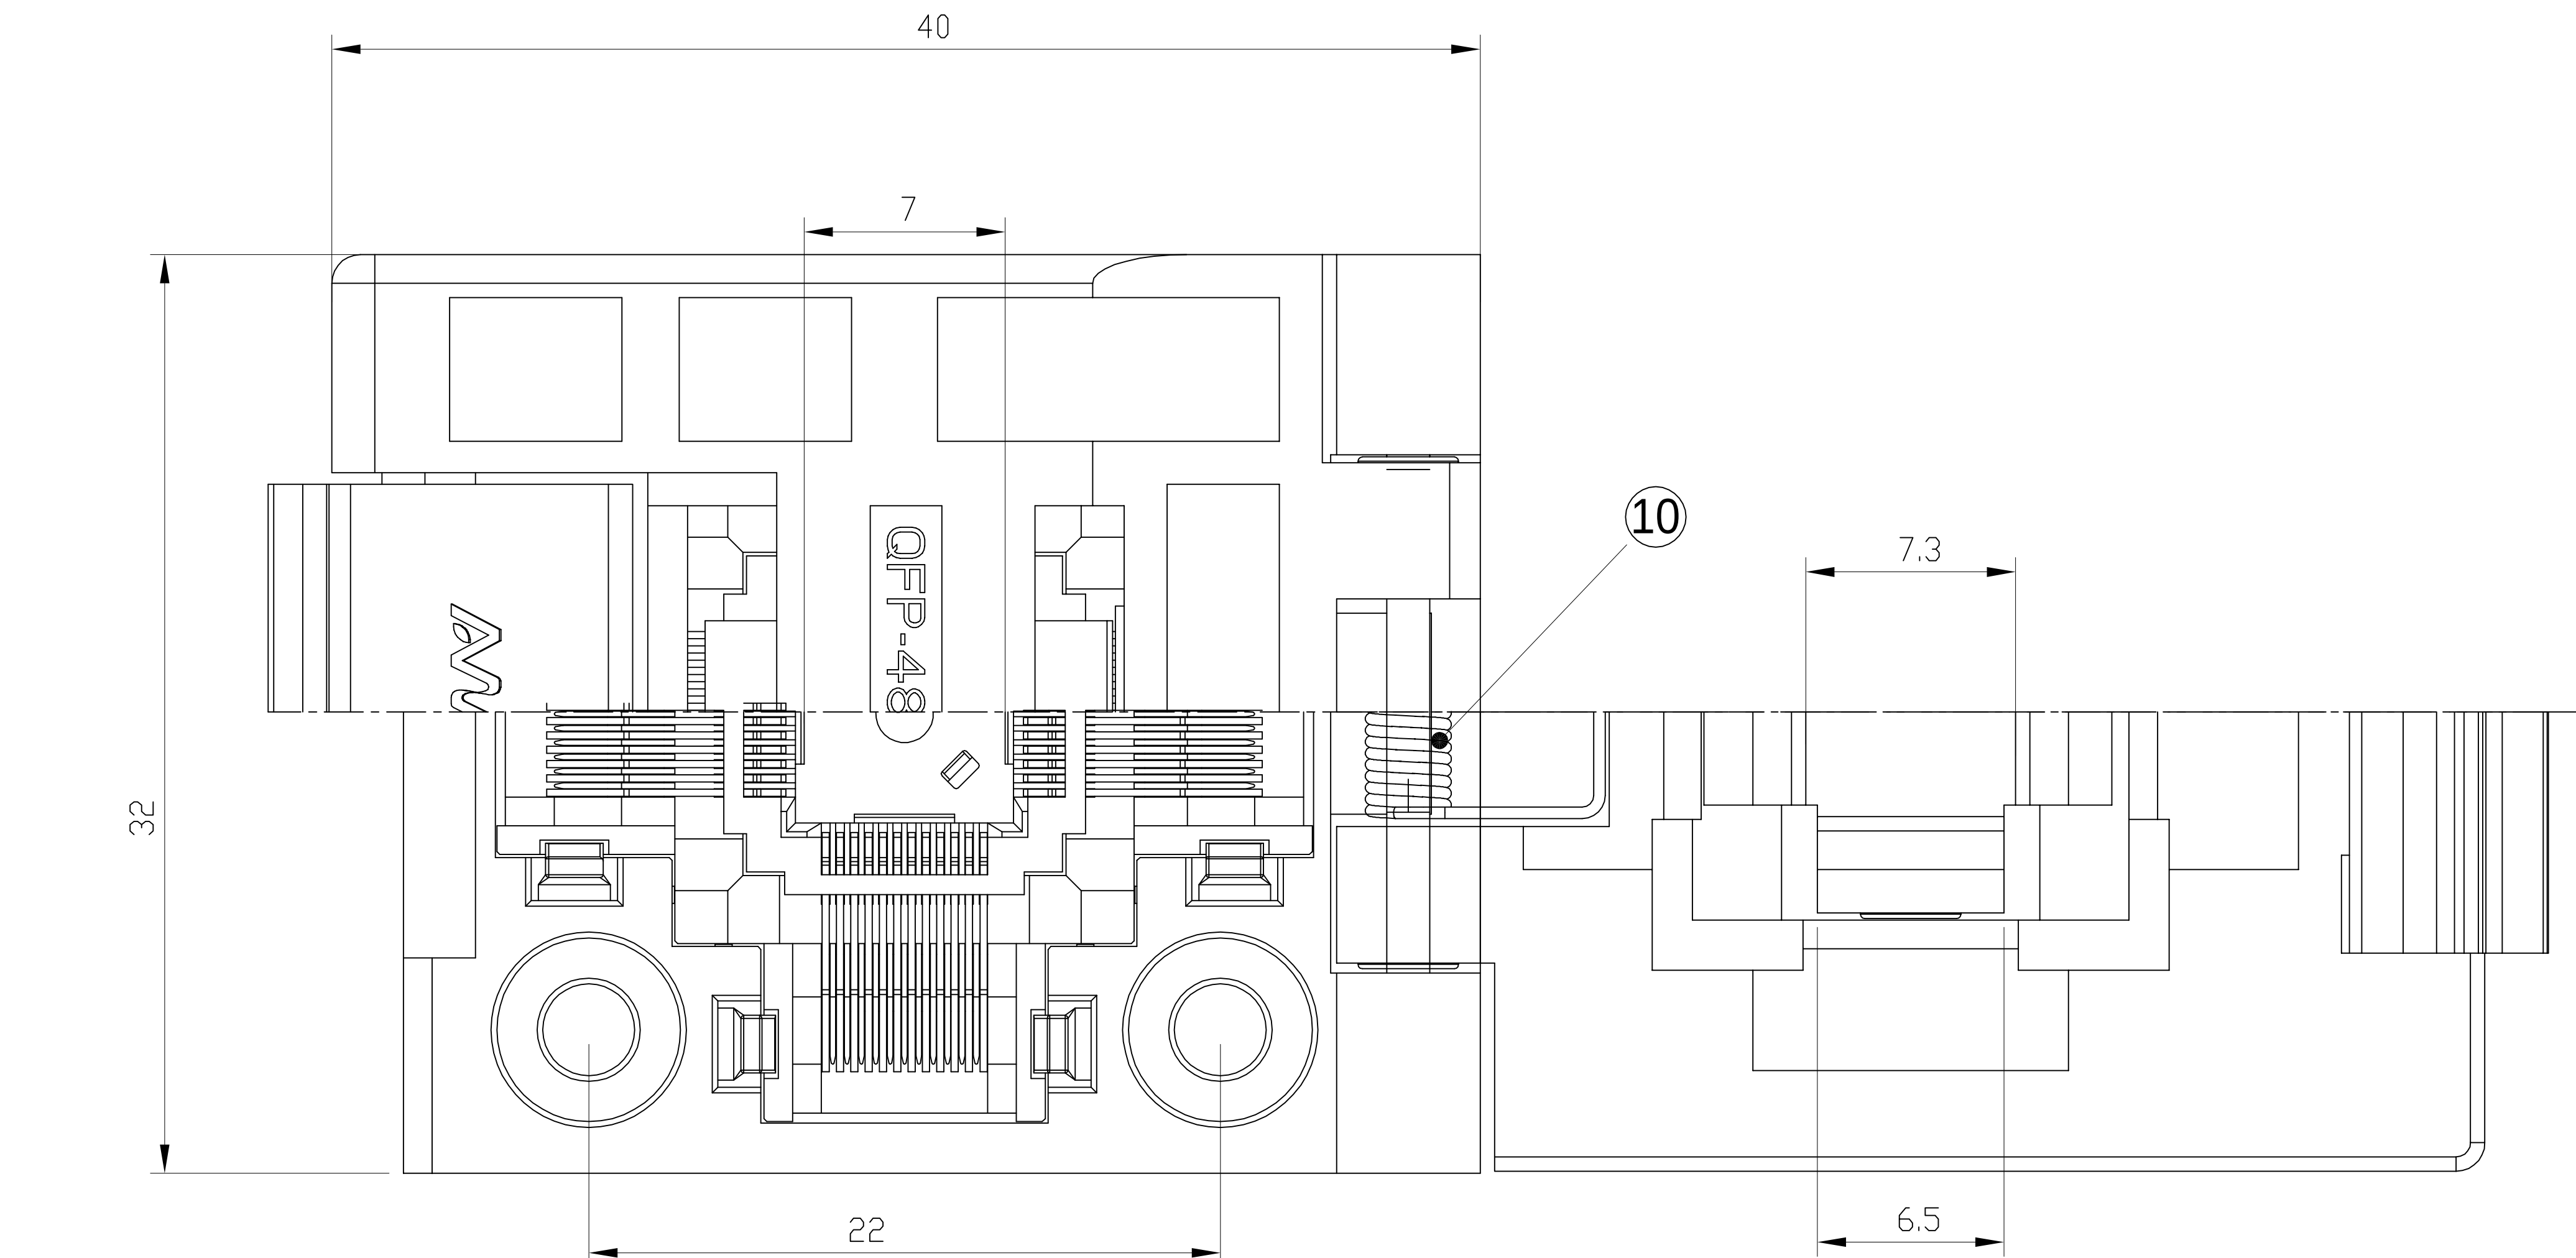

10	30-B-4515X	SPRING	SUS	1	FOR COVER	TOLERANCE	PROJECTION		GENERAL TOLERANCES	±0.10	TITLE	QFP48-0.5 SOCKET
9	QFP48-0.5-FFC	FLOATING CARRIER	PEI/PES	1	BLACK				R E V	A	CLASS	QFP48-0.5-CP01NT
8	QFP48-0.5-FSB	SWINGING BLOCK	PEI/PES	1	BLACK							
7	QFP48-0.5-FCR	COVER	PEI/PES	1	BLACK	X. ± 0.50	DIMENSION:	mm	SCALE:	1:1	DRW.NO	02
6	QFP48-0.5-FLH	LATCH	PEI/PES	1	BLACK	X.X ± 0.25	APP:		DATE:			
5	QFP48-0.5-FBY	BODY	PEI/PES	1	BLACK	X.XX ± 0.10	CHECK:		DATE:			
4	QFP48-0.5-FCE	CORE	PEI/PES	1	BLACK	X.XXX ± 0.05	DEGK:	ENG03	DATE:	20150606		
3	QFP48-0.5-FCTC	CONTACT	BeCu	16	FOR COVER							
2	QFP48-0.5-FCTB	CONTACT	BeCu	16	BLACK							
1	QFP48-0.5-FCTA	CONTACT	BeCu	16	Au PLATING							
No	Part Number	Name	Material	Q'ty	Note							