

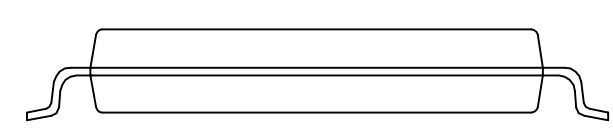
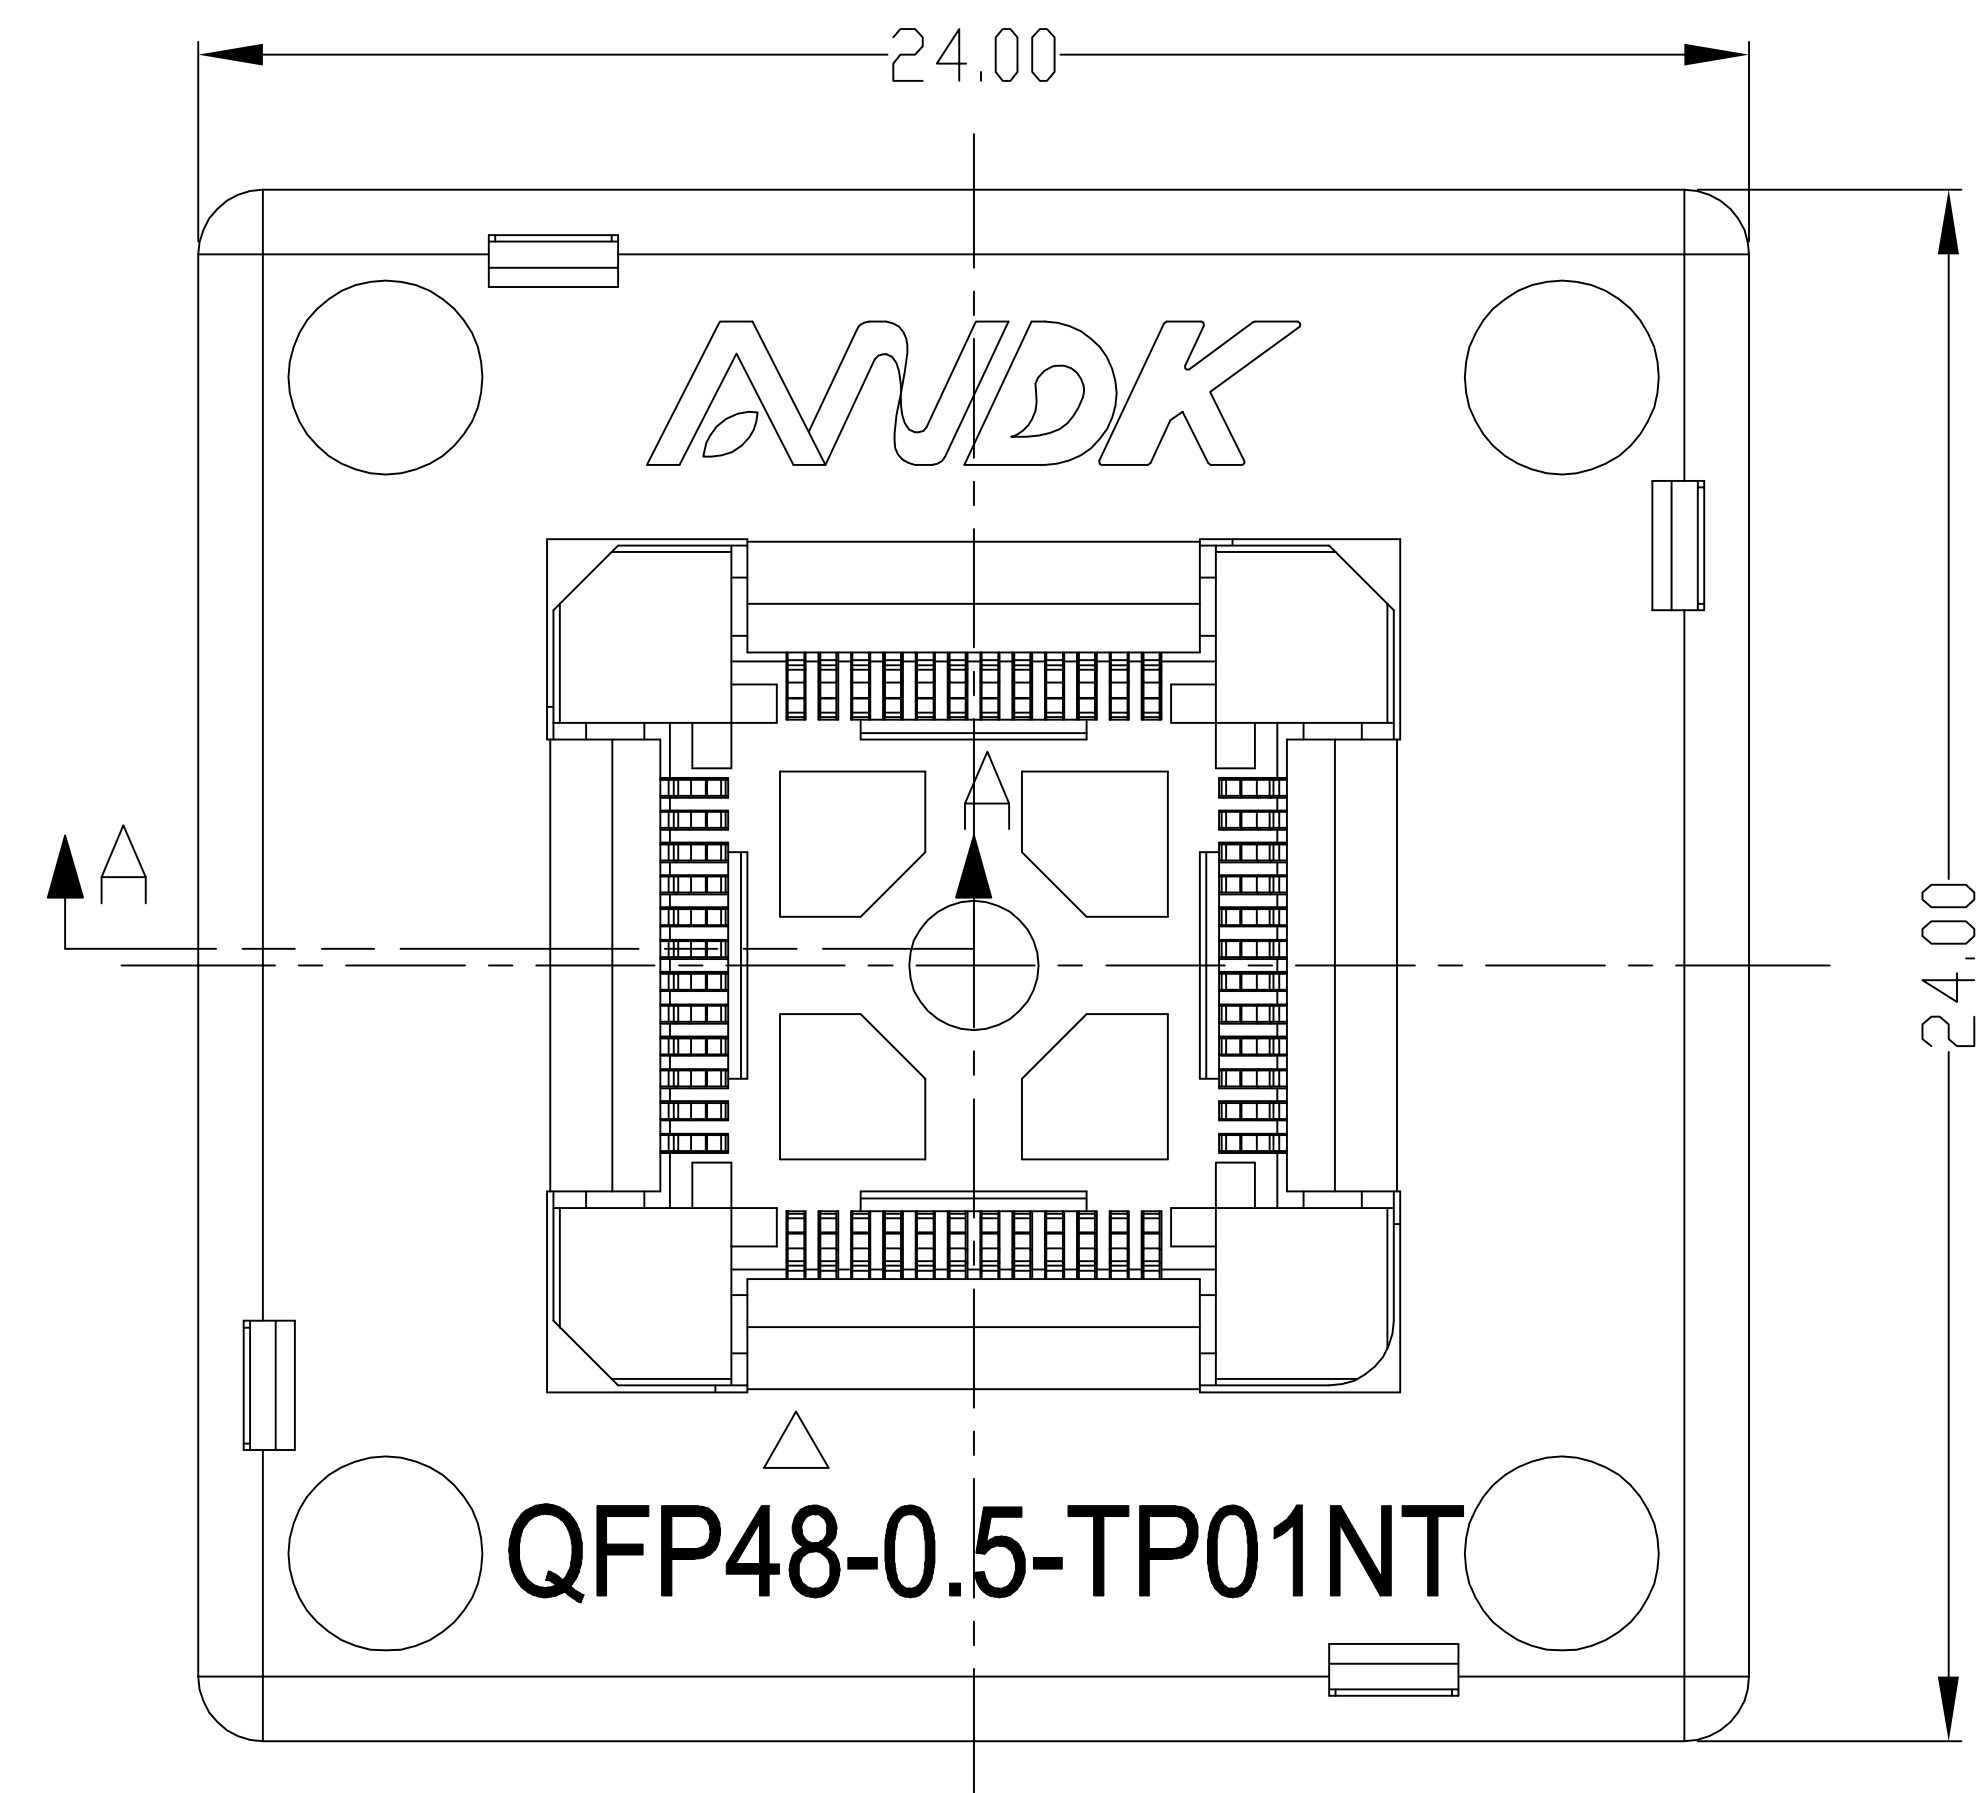
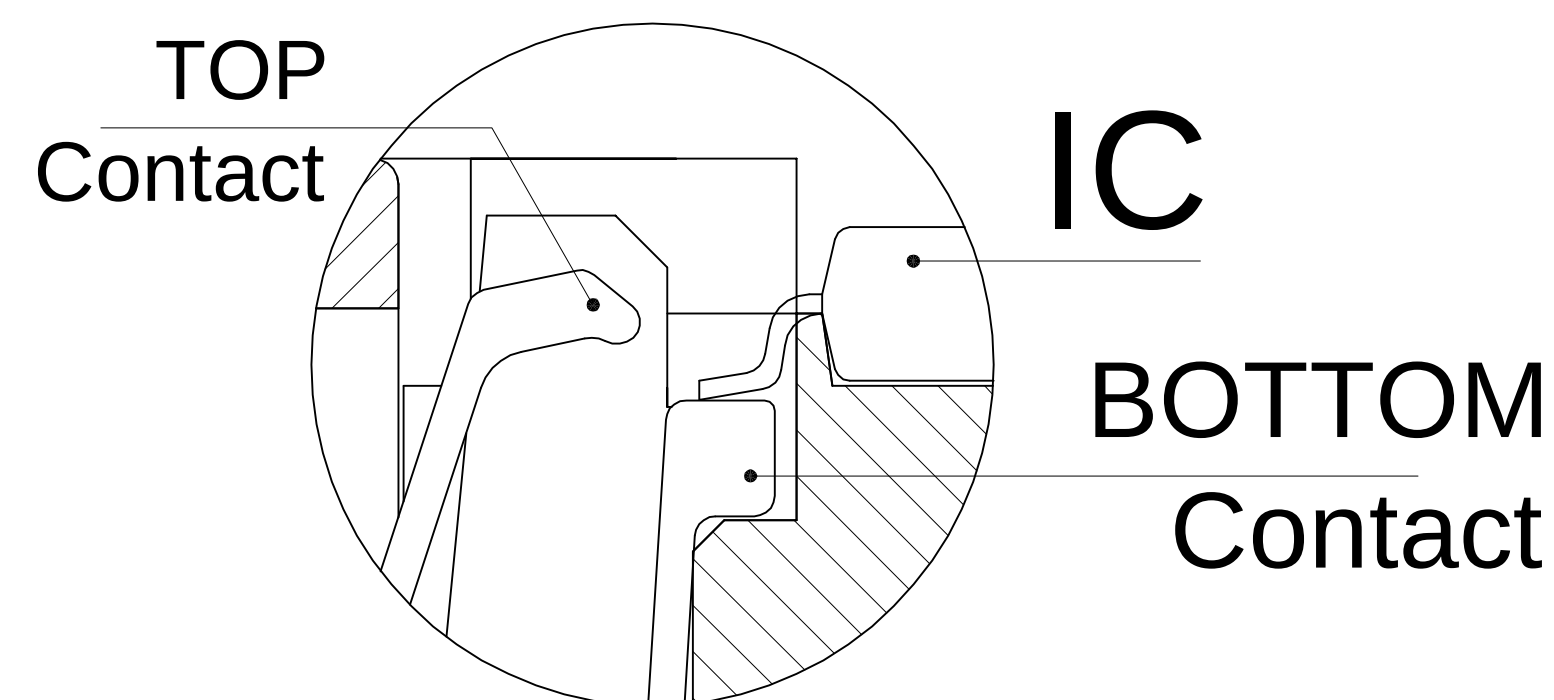



	REVISION DESCRIPTION	CHECK	APP	DATE	REV.NO	NOTICE NO	
△ 1							
△ 2							
△ 3							

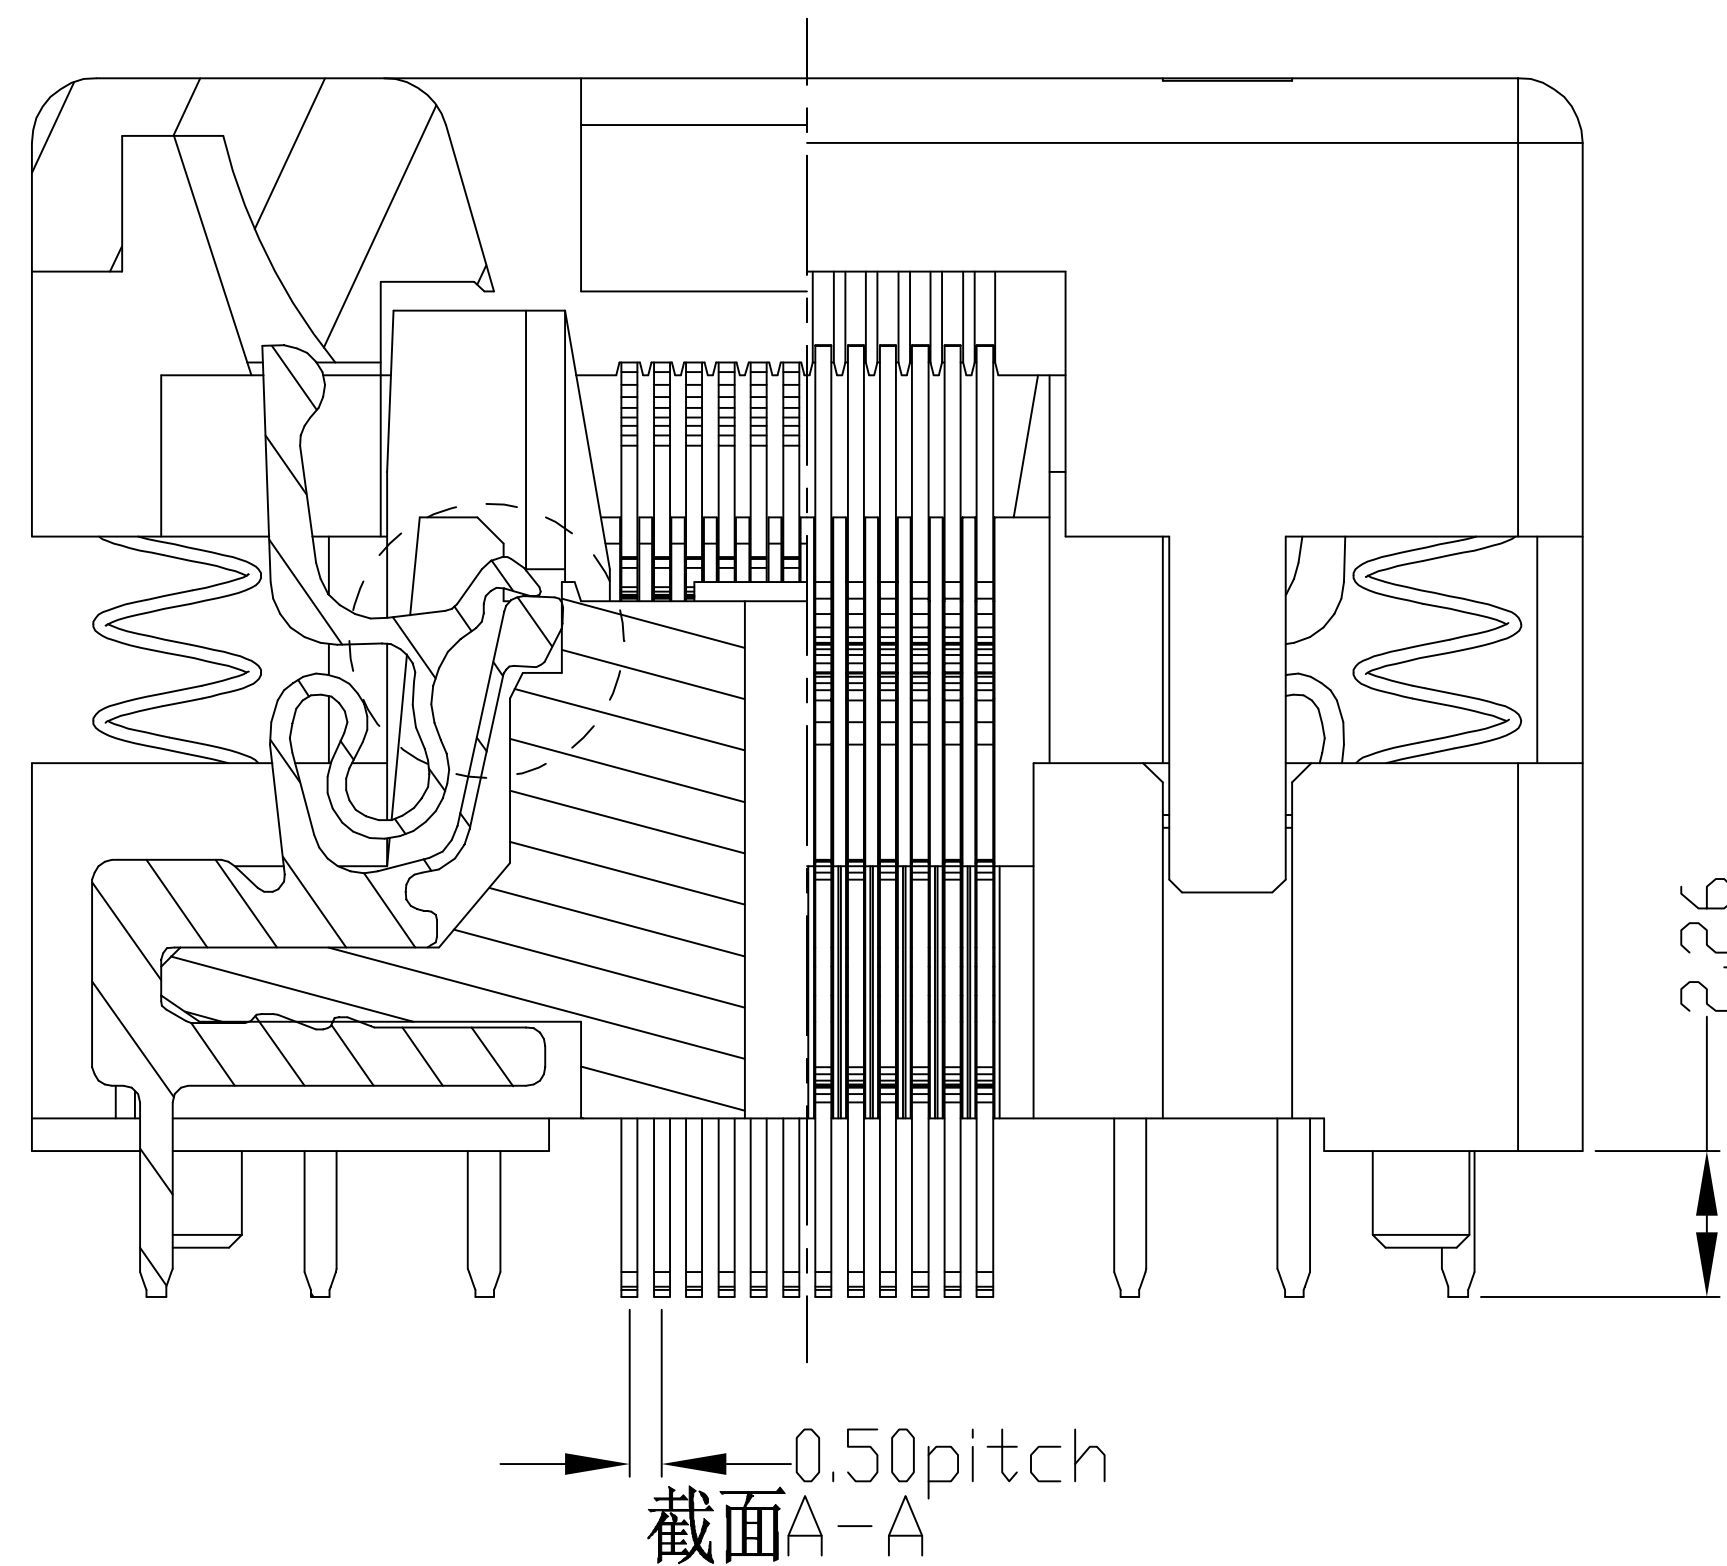

↓ Insertion

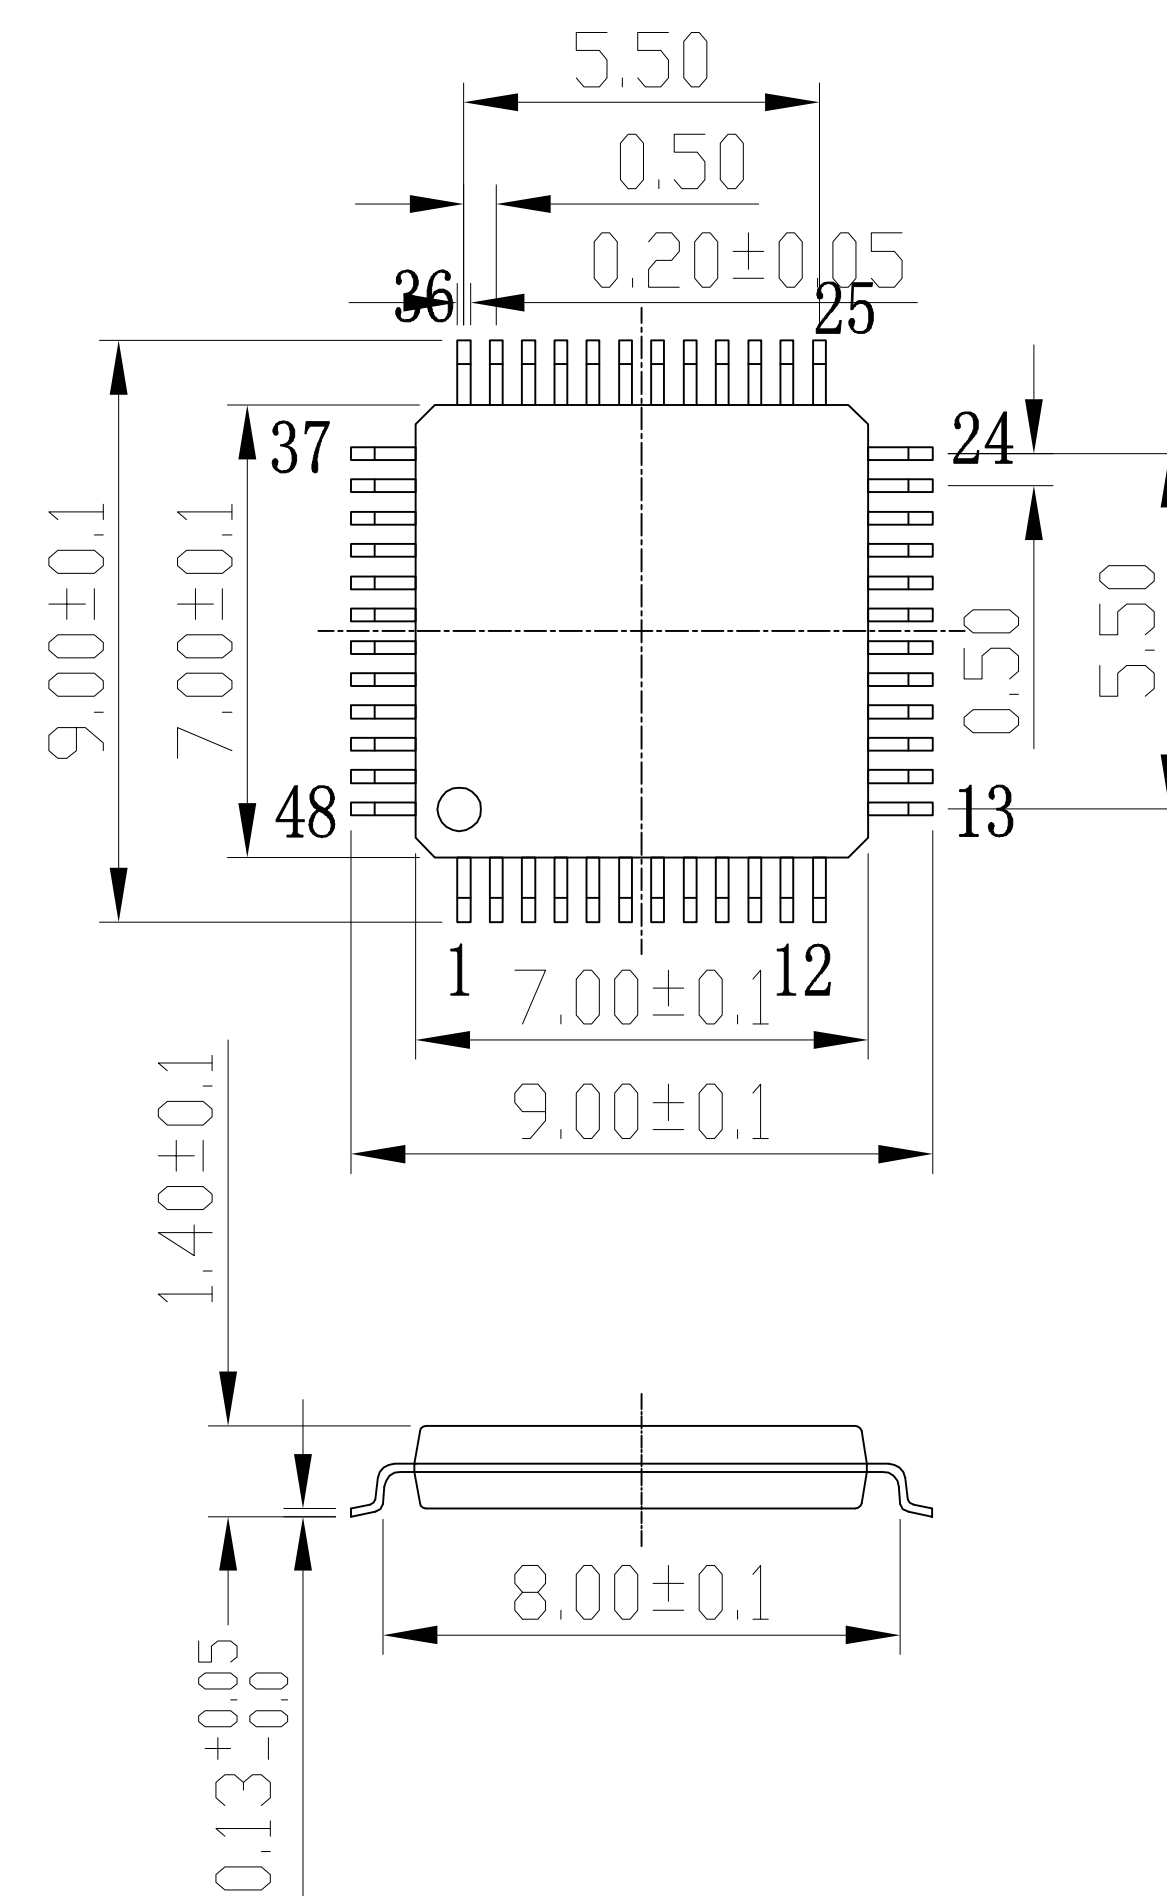


CONTACT TIP DETAIL

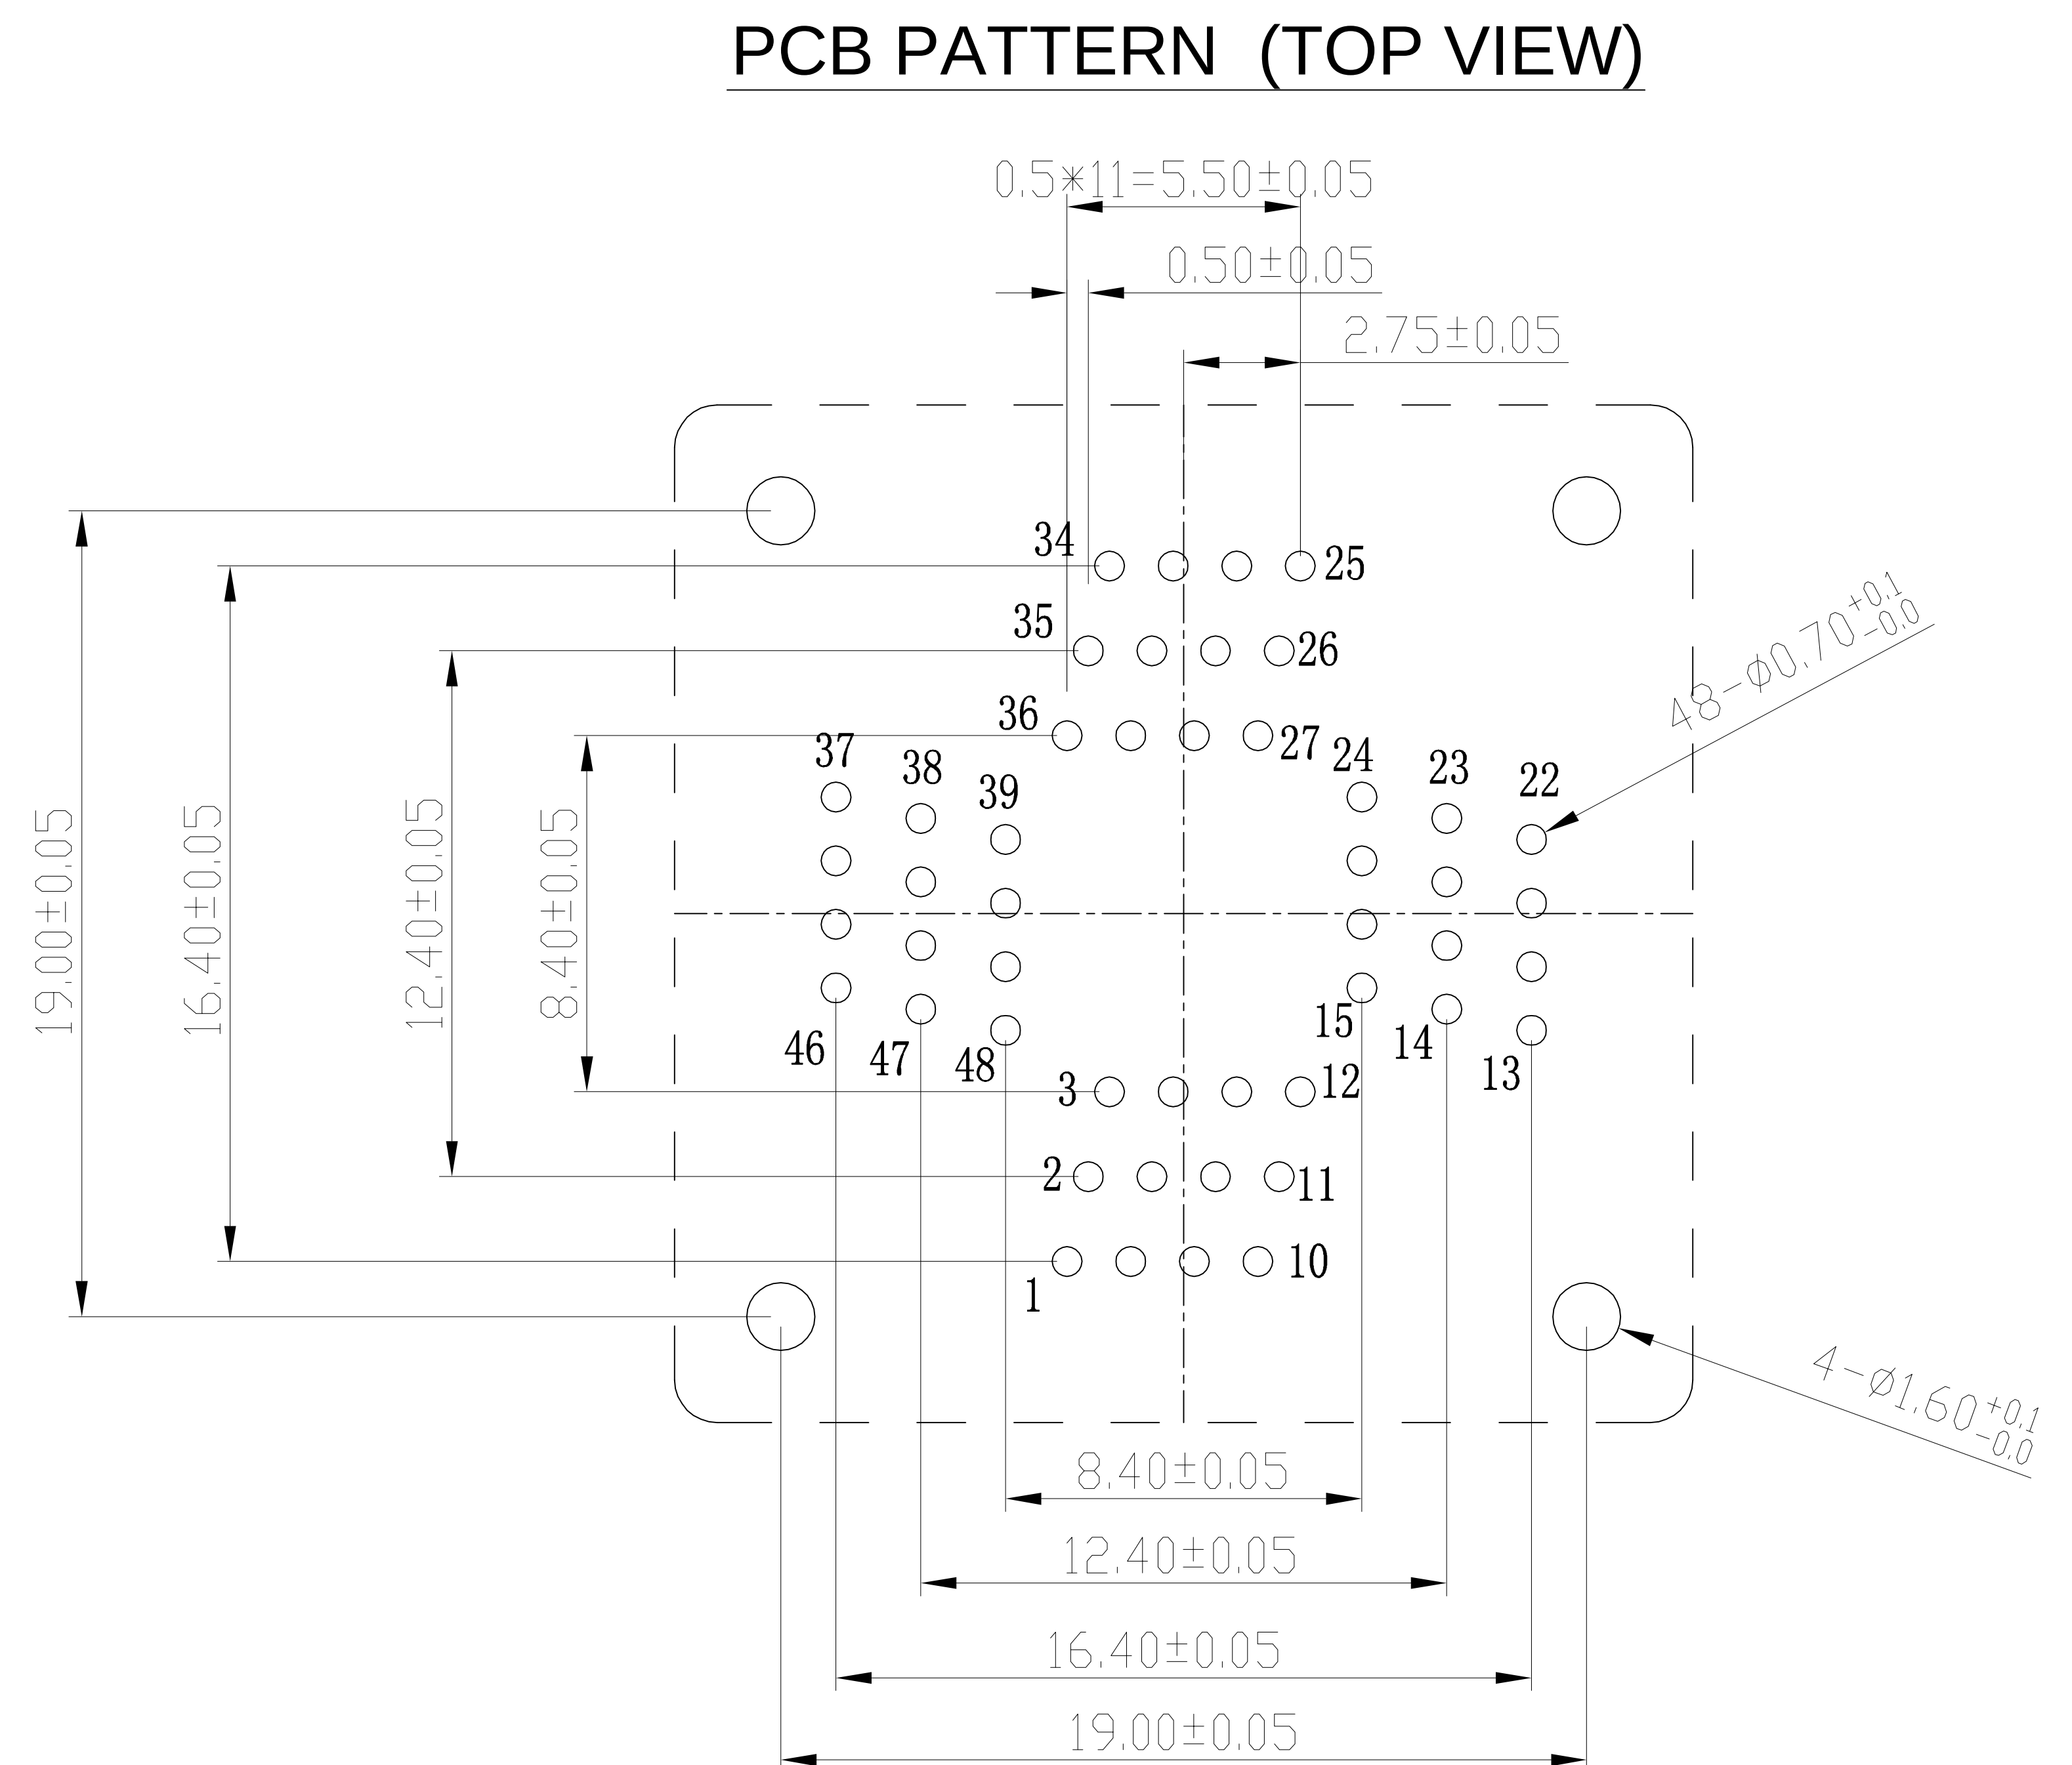




PERFORMANCE

- 1、Insulation Resistance: 1000M Ω Min.At DC 500V
- 2、Dielectric Withstanding Voltage For 1 Minute At AC500V
- 3、Contact Resistance(Initial) 100m Ω MAX at 10mA
- 4、Rated Current: 1.0A.
- 5、Operation Temperature range -65°C ~+150°C
- 6、Terminal strength against pulling 0.5Kg(1min)
- 7、Insertion Min10000 cycle (Mechanical)
- 8、Material: Body:PAI,PES; Contact:BeCu,Au plating(Ni-base)

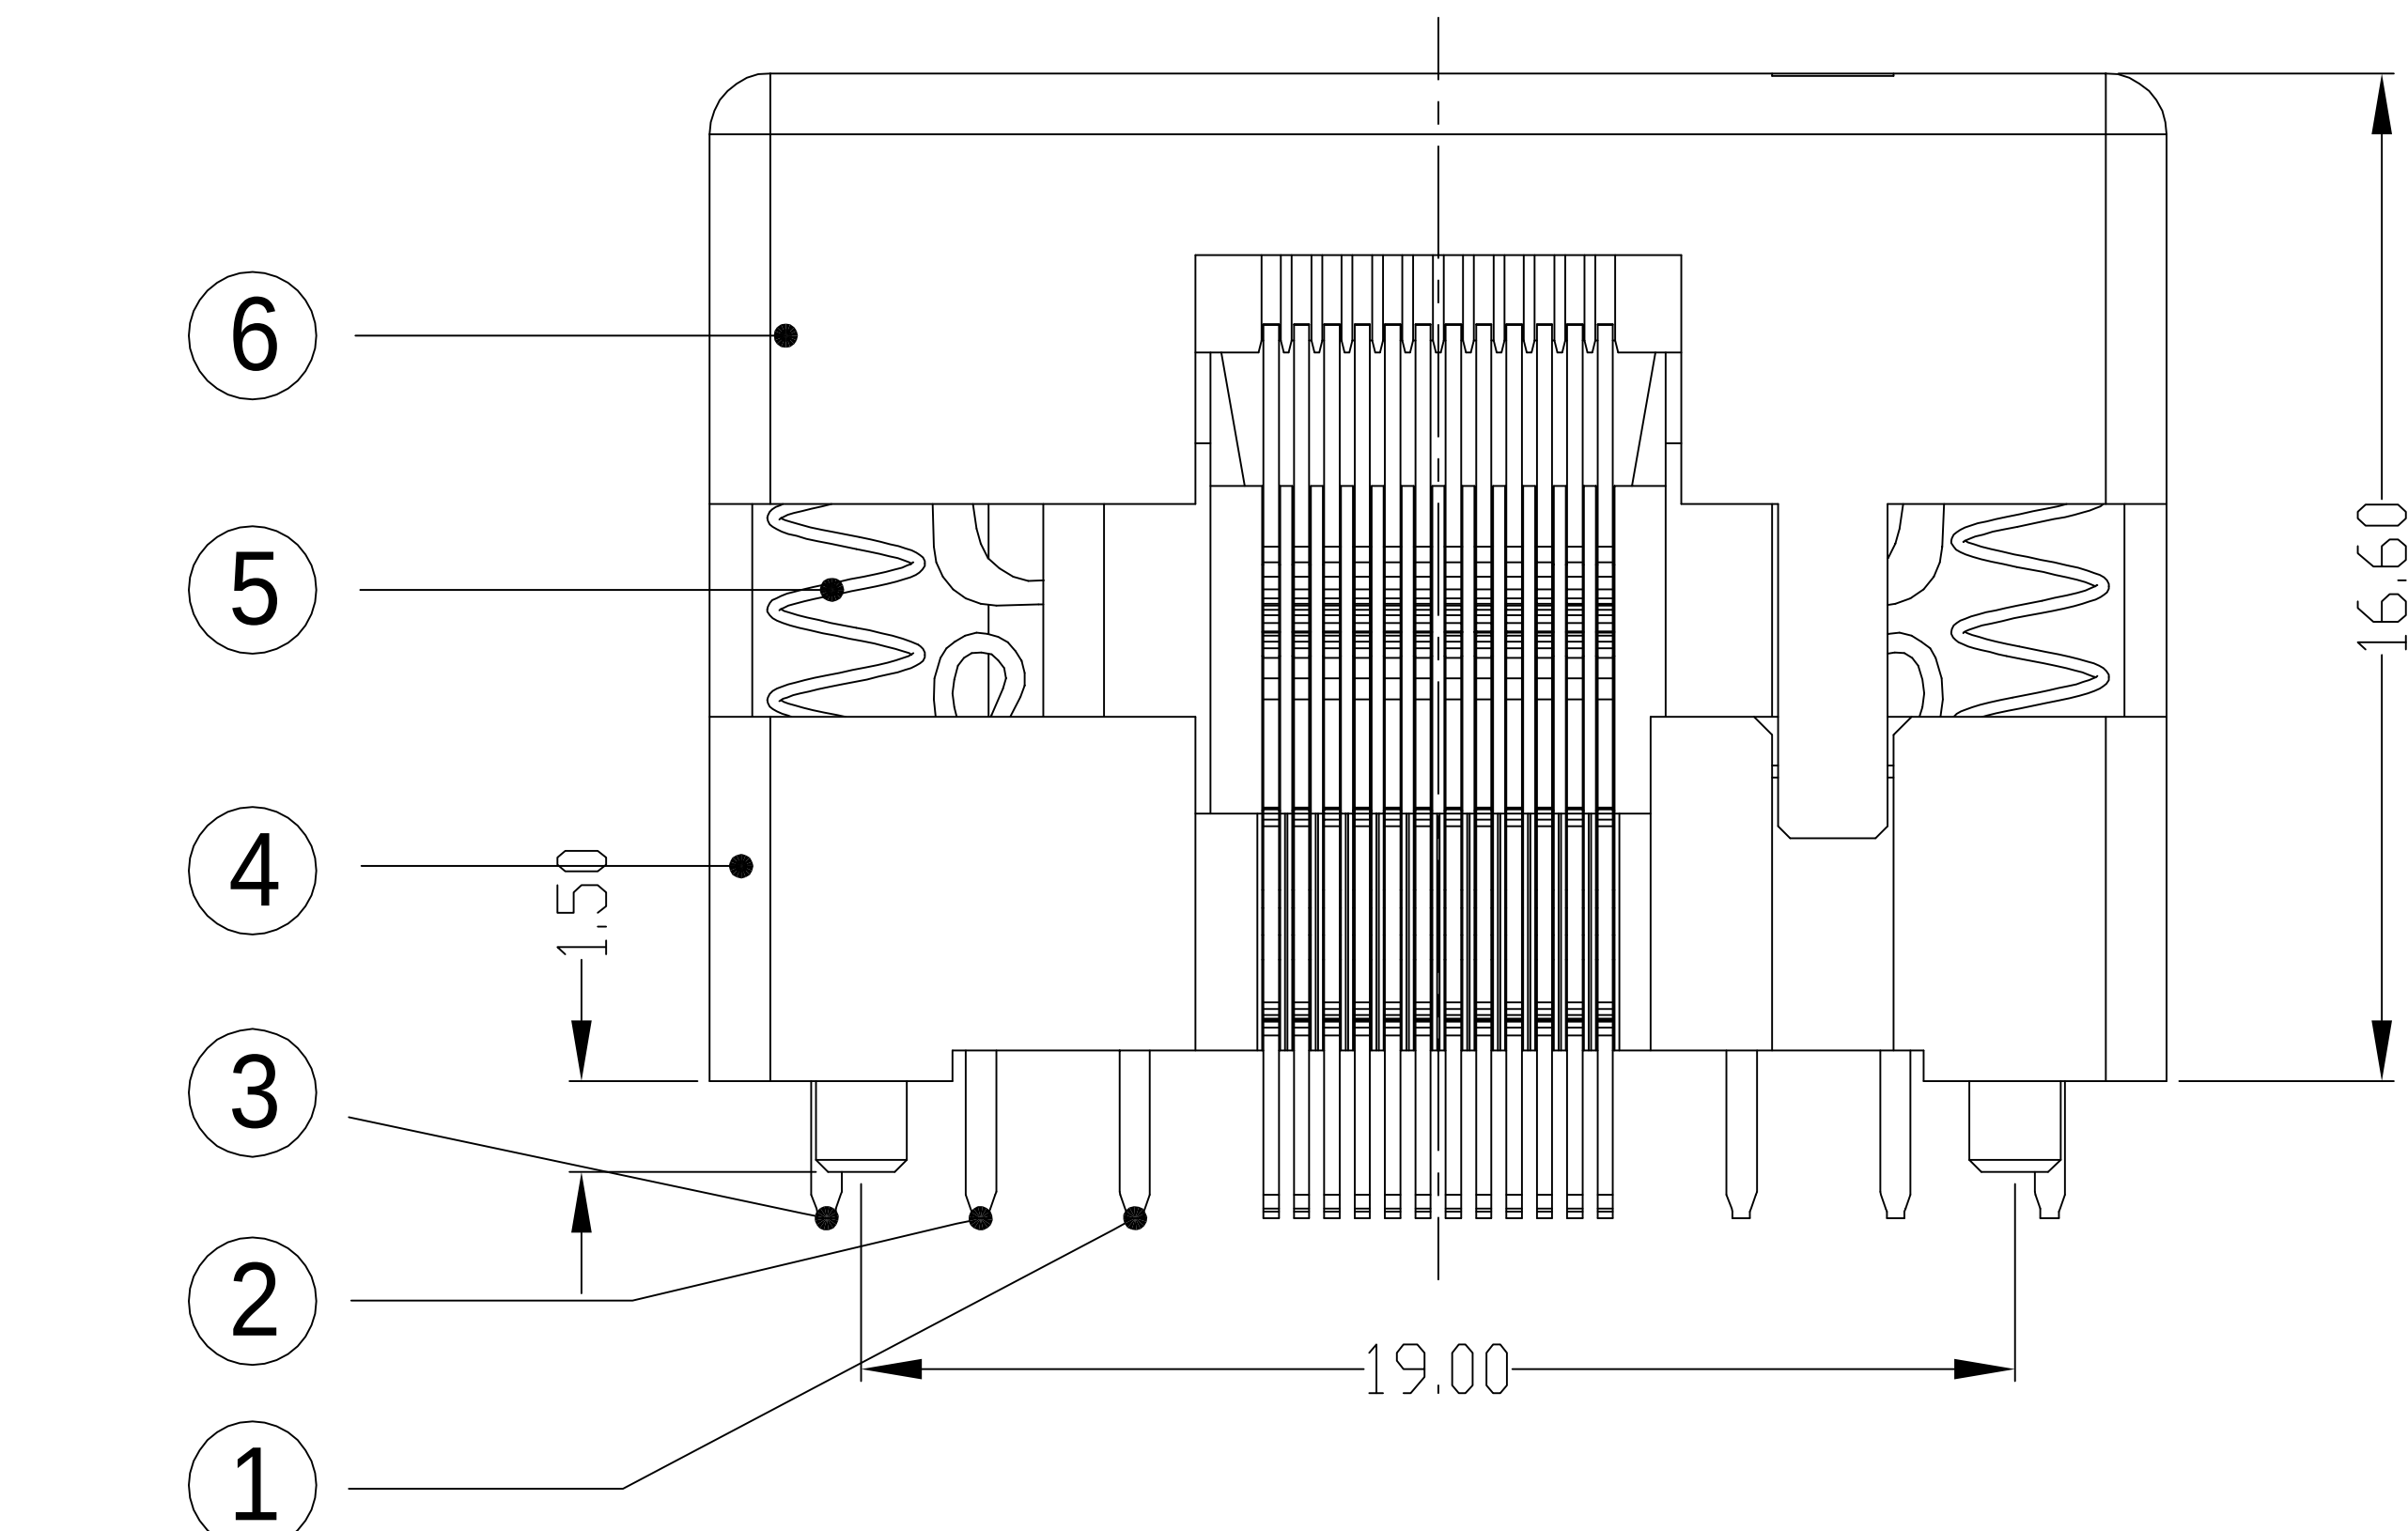

CONTACT LEAD
W0.45XT0.25

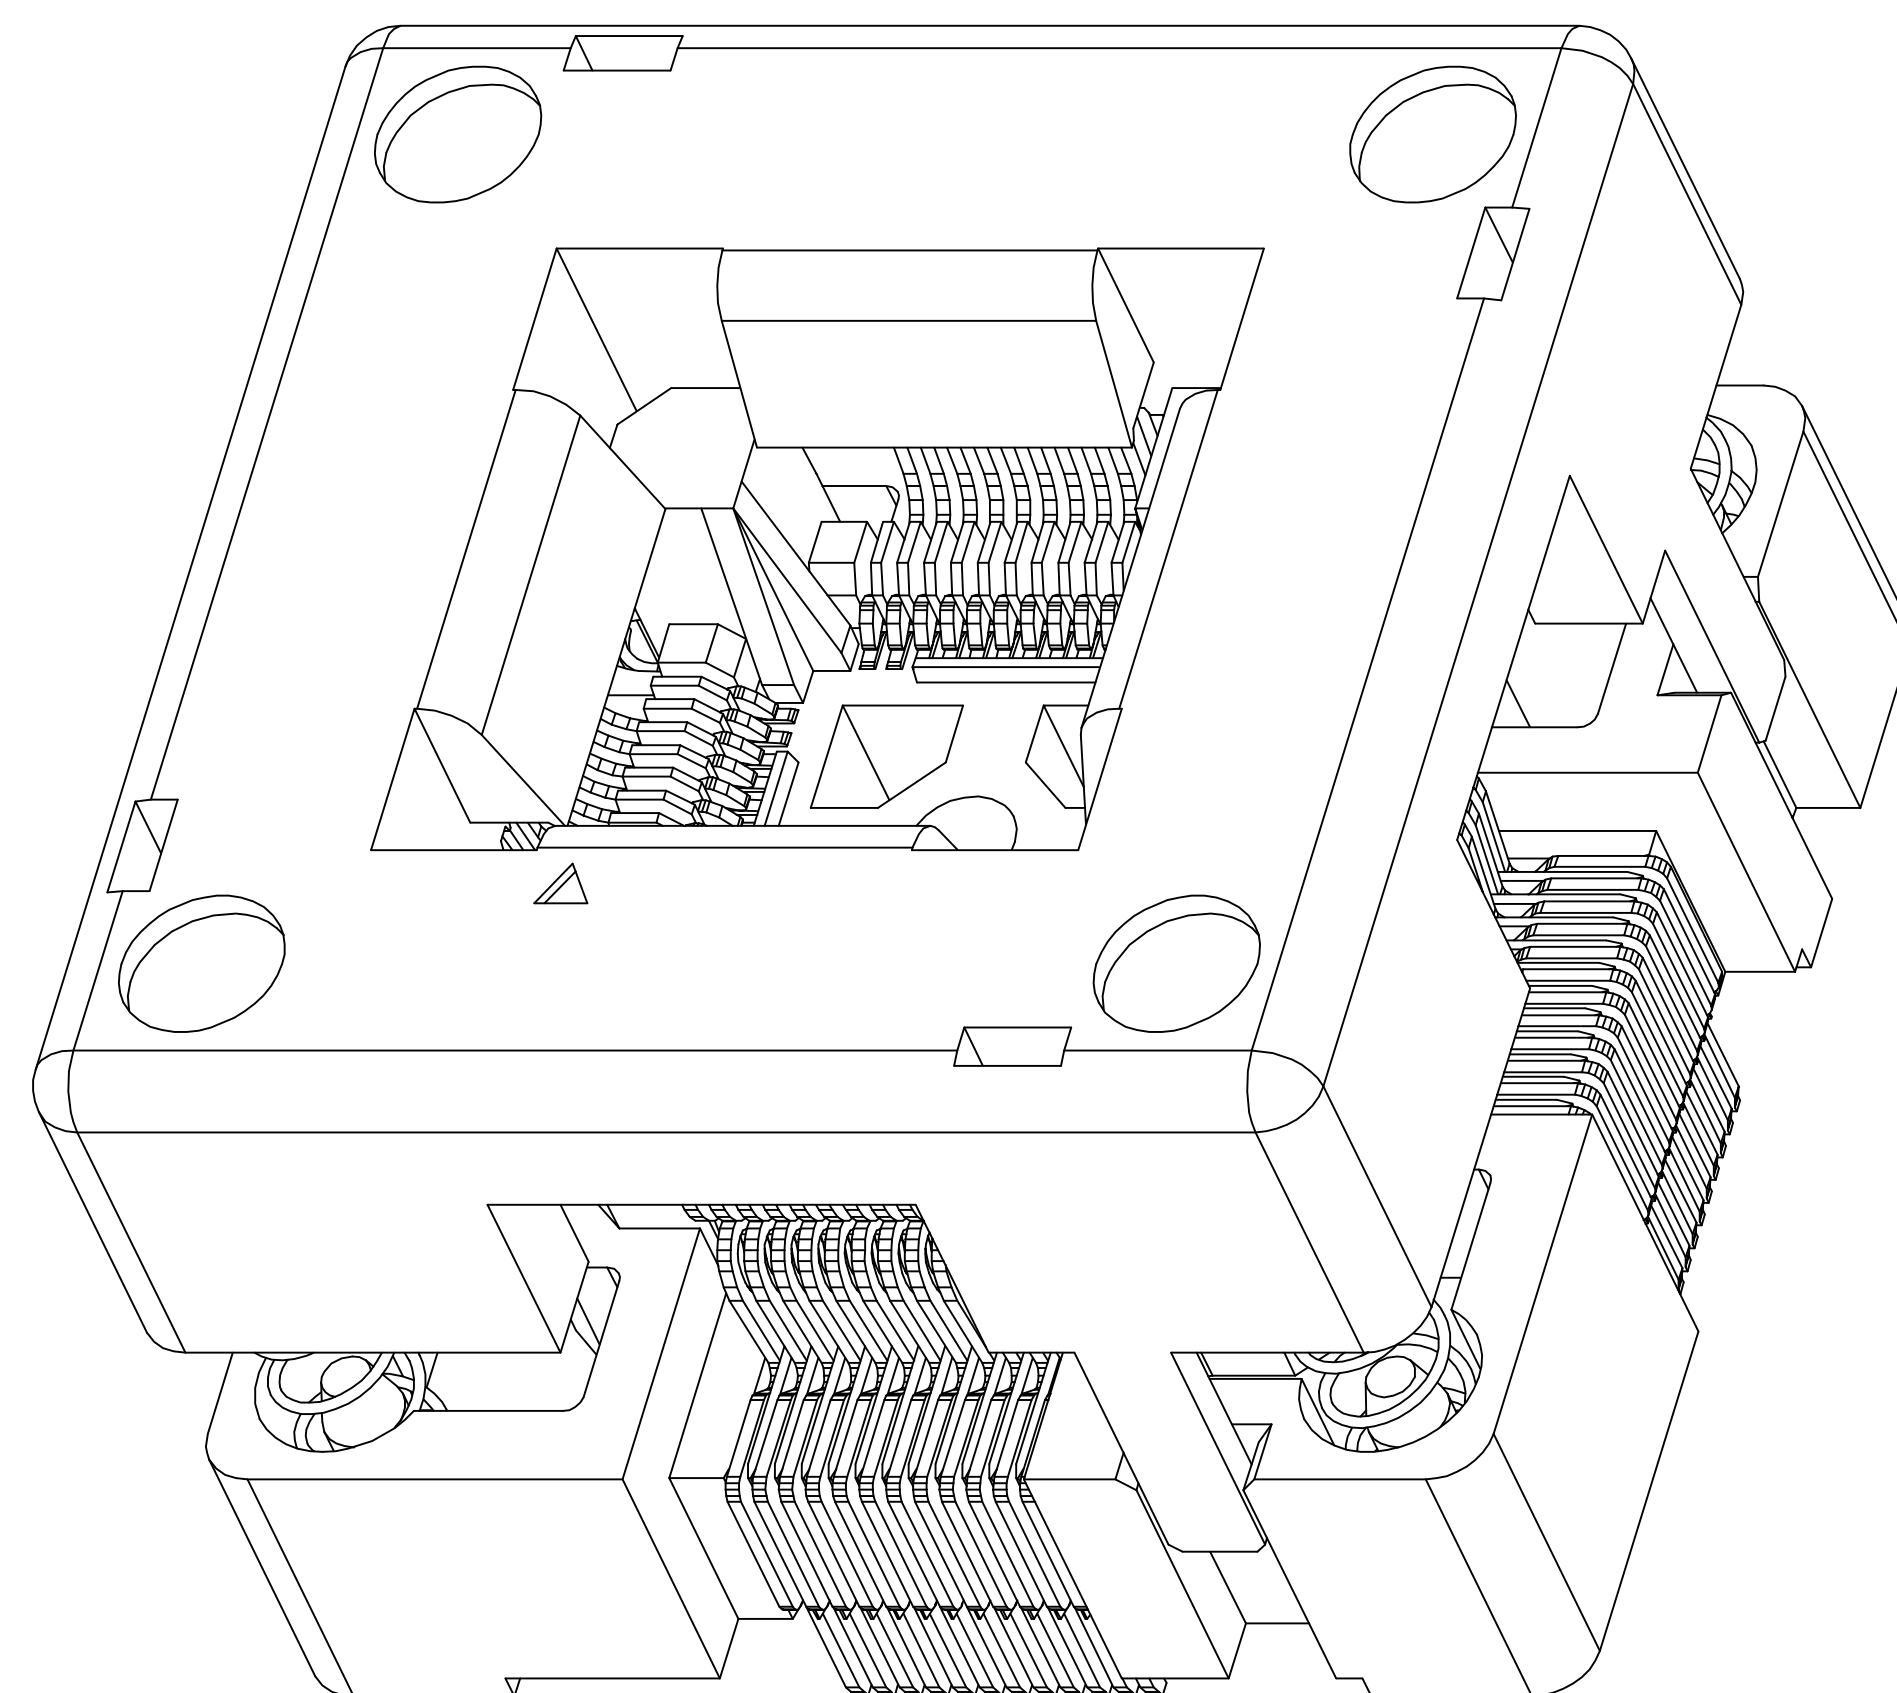

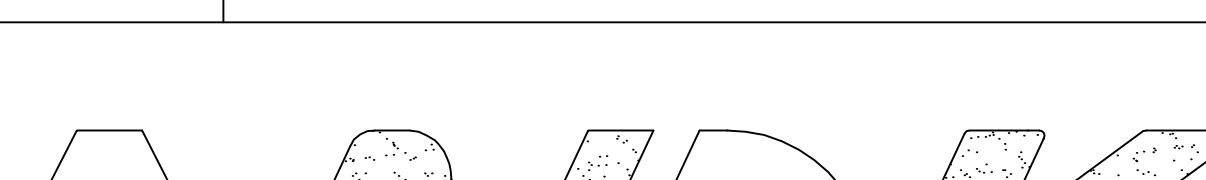						TOLERANCE	PROJECTION		GENERAL TOLERANCES	±0.10	TITLE	QFP48-0.5 SOCKET
									R E V	A	CLASS	QFP48-0.5-TP01NT
6	QFP48-0.5-XCR	COVER	PEI/PES	1	BLACK	X. ± 0.50	DIMENSION:	mm	SCALE:	1:1	DRW.NO	01
5	30-B-4515X	SPRING	SUS	4	FOR COVER	X.X ± 0.25	APP:		DATE:			
4	QFP48-0.5-XBY	BODY	PEI/PES	1	BLACK	X.XX ± 0.10	CHECK:		DATE:			
3	QFP48-0.5-XCTC	CONTACT	BeCu	16	FOR COVER	X.XXX ± 0.05	DEGK: eng03		DATE: 20150606			
2	QFP48-0.5-XCTB	CONTACT	BeCu	16	BLACK							
1	QFP48-0.5-XCTA	CONTACT	BeCu	16	Au PLATING							
No	Part Number	Name	Material	Q/ty	Note							