

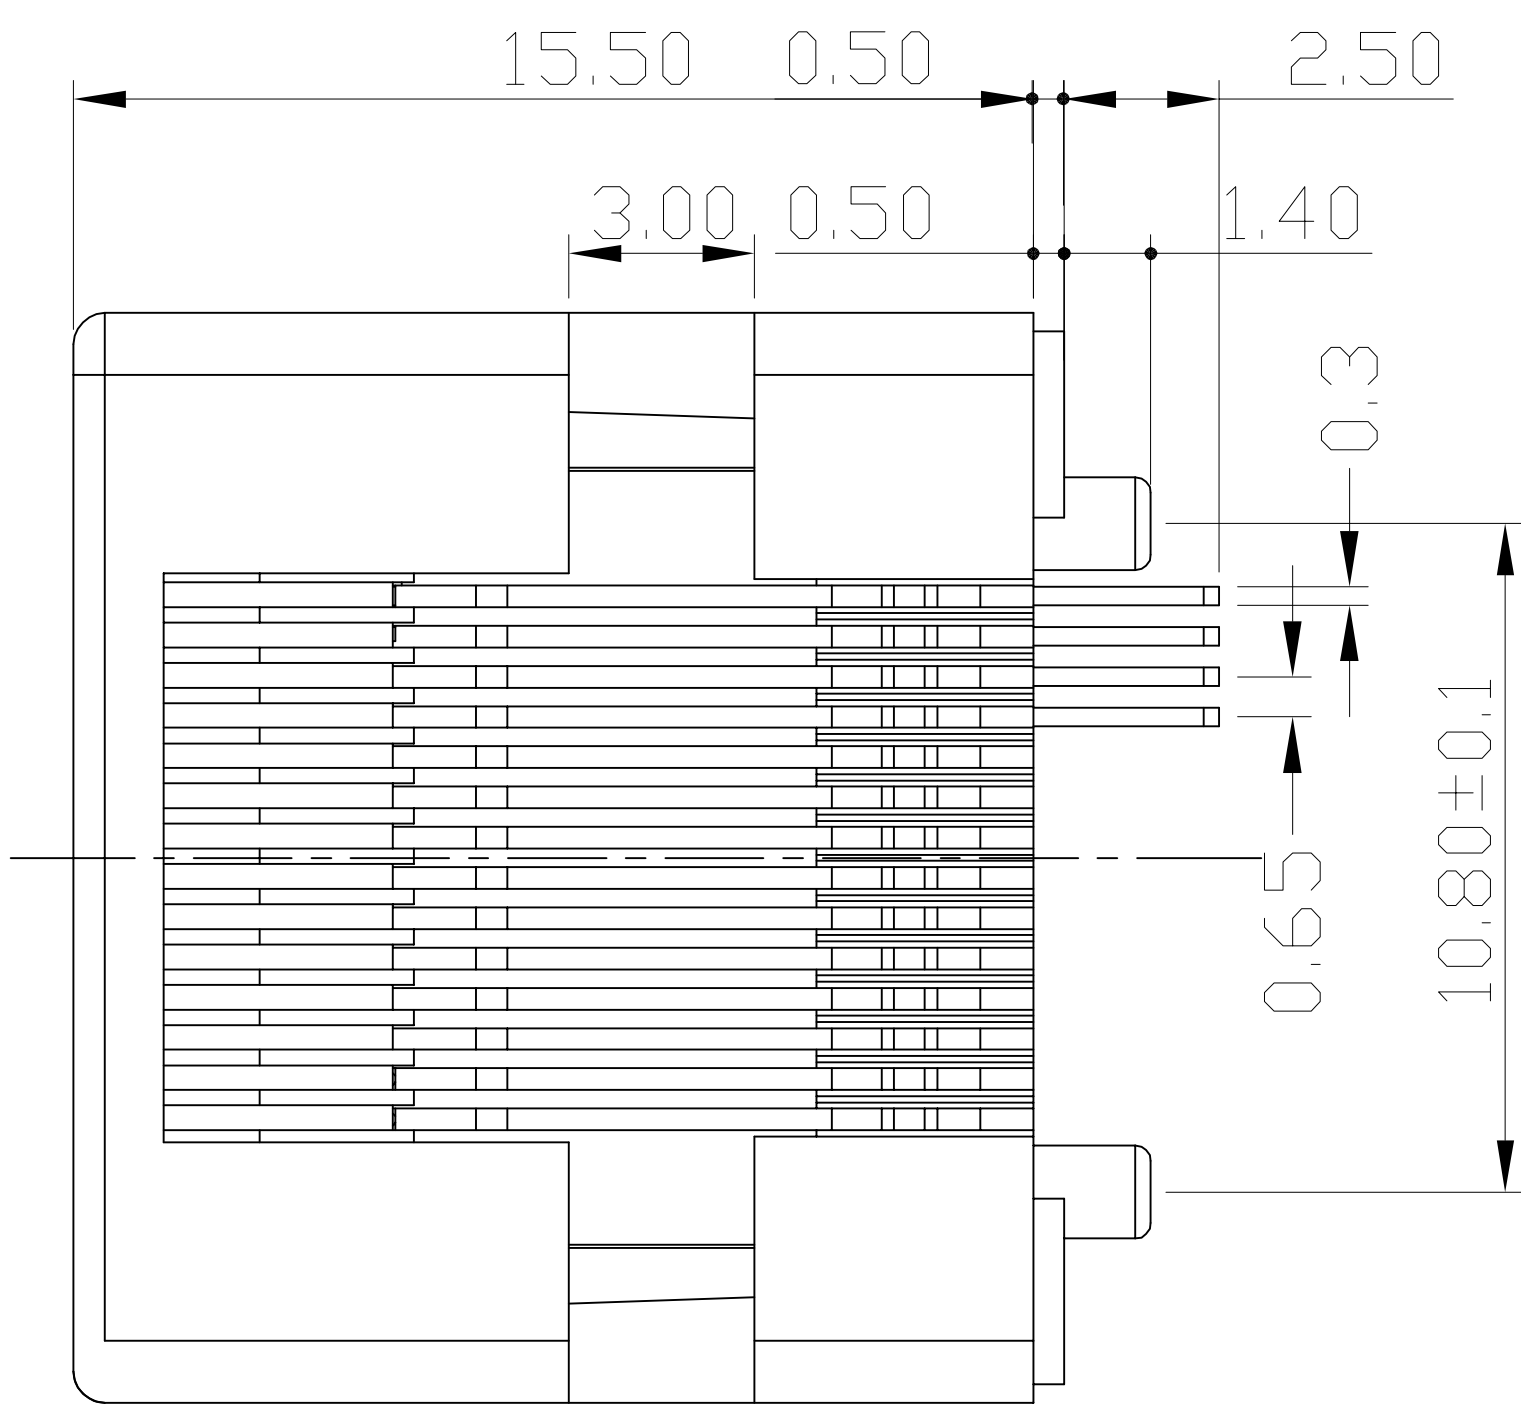
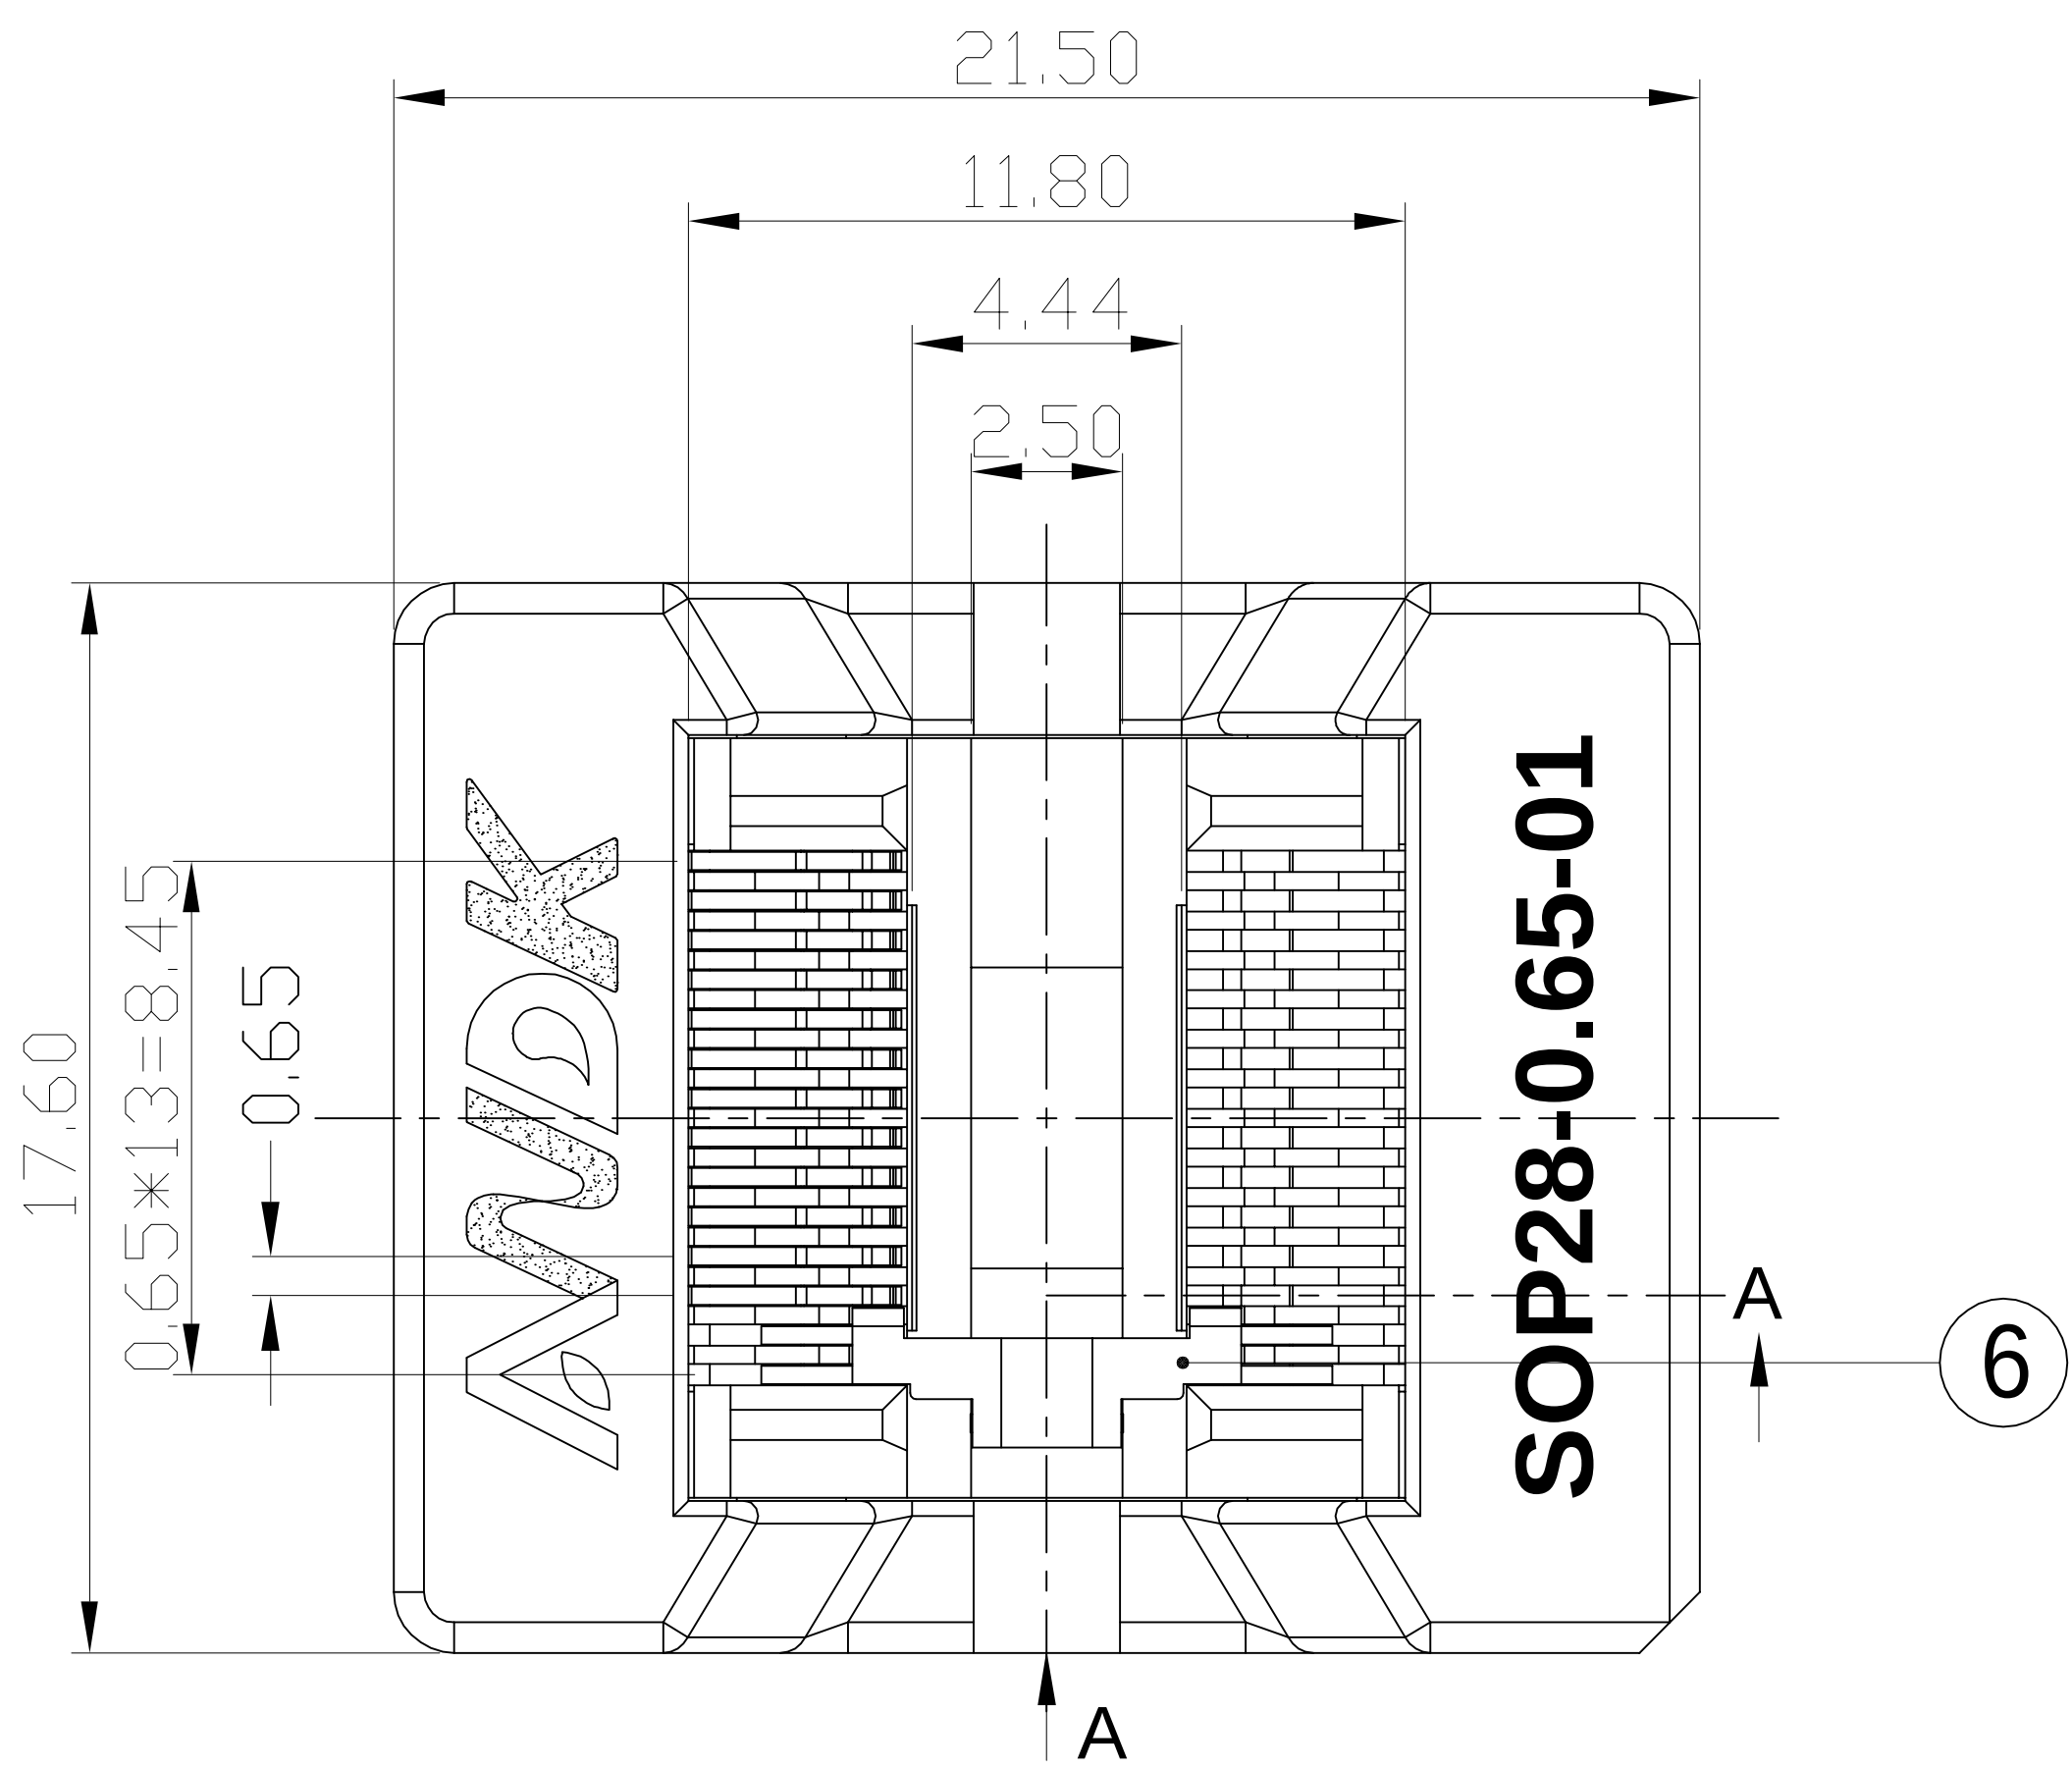



	10	11		12	
	REVISION	DESCRIPTION	CHECK	APP	DATE
1					
2					
3					

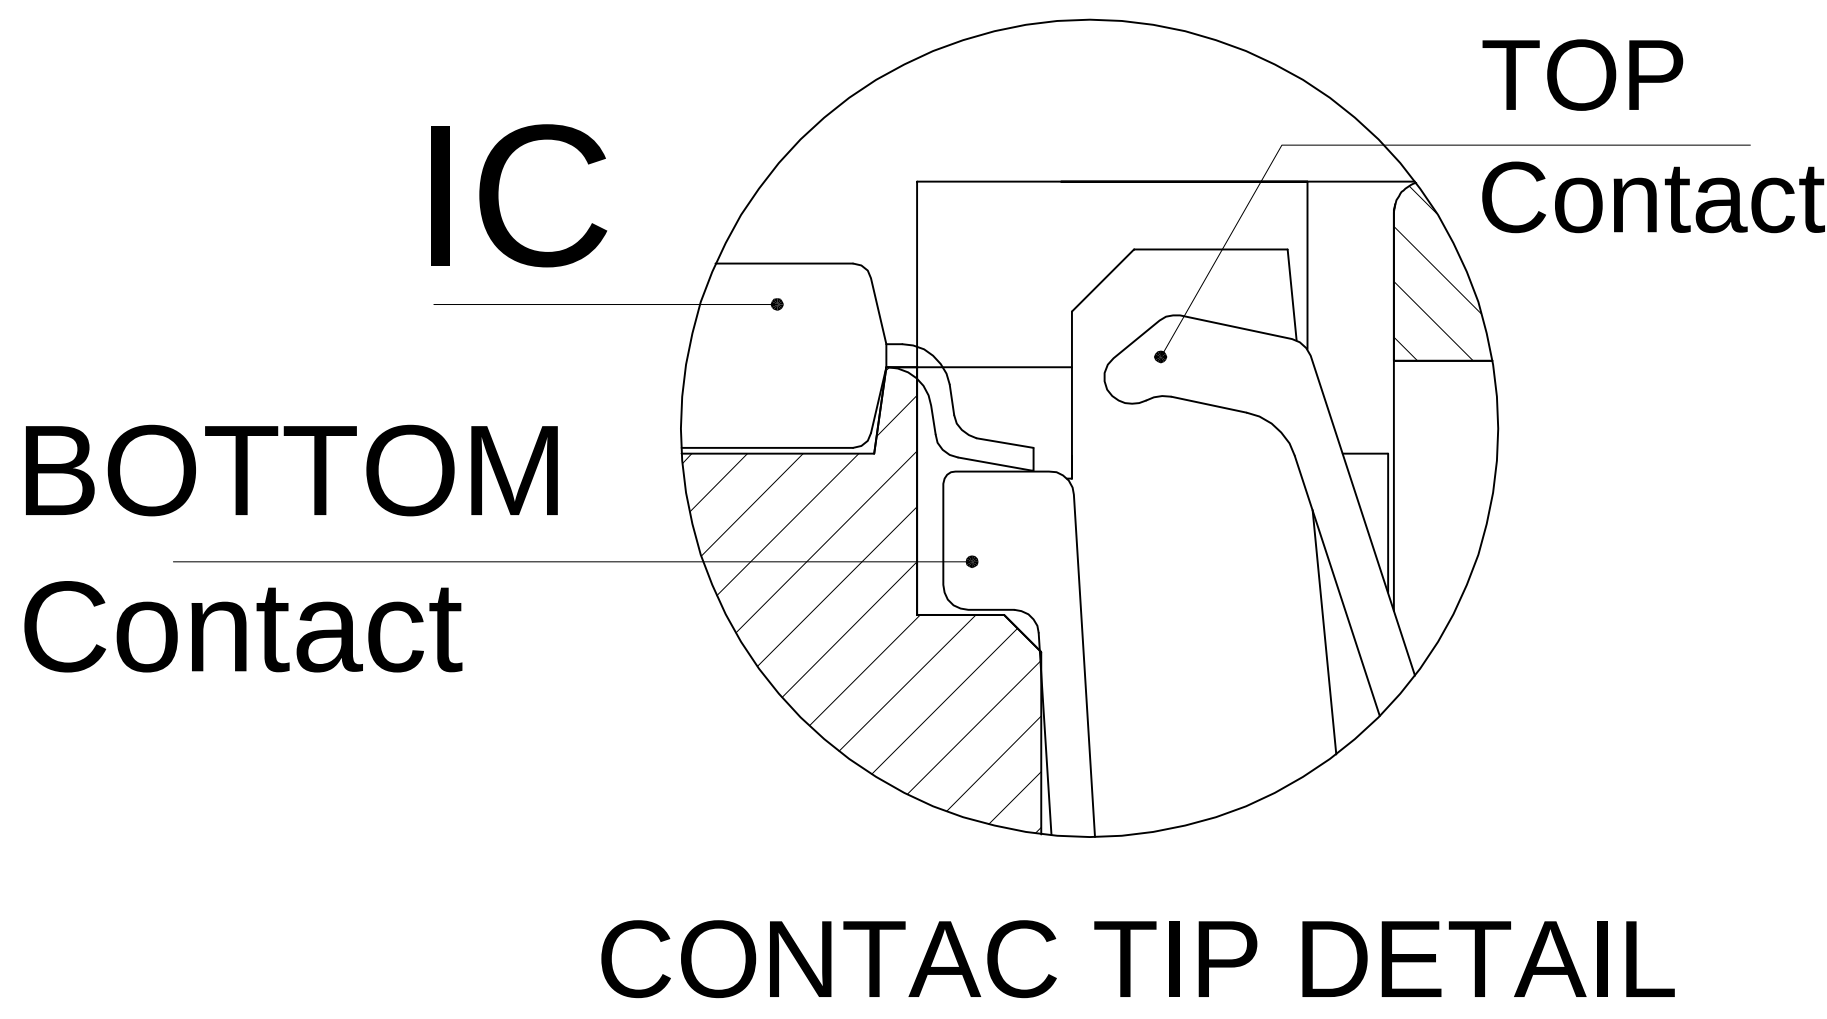

PCB PATTERN (TOP VIEW)

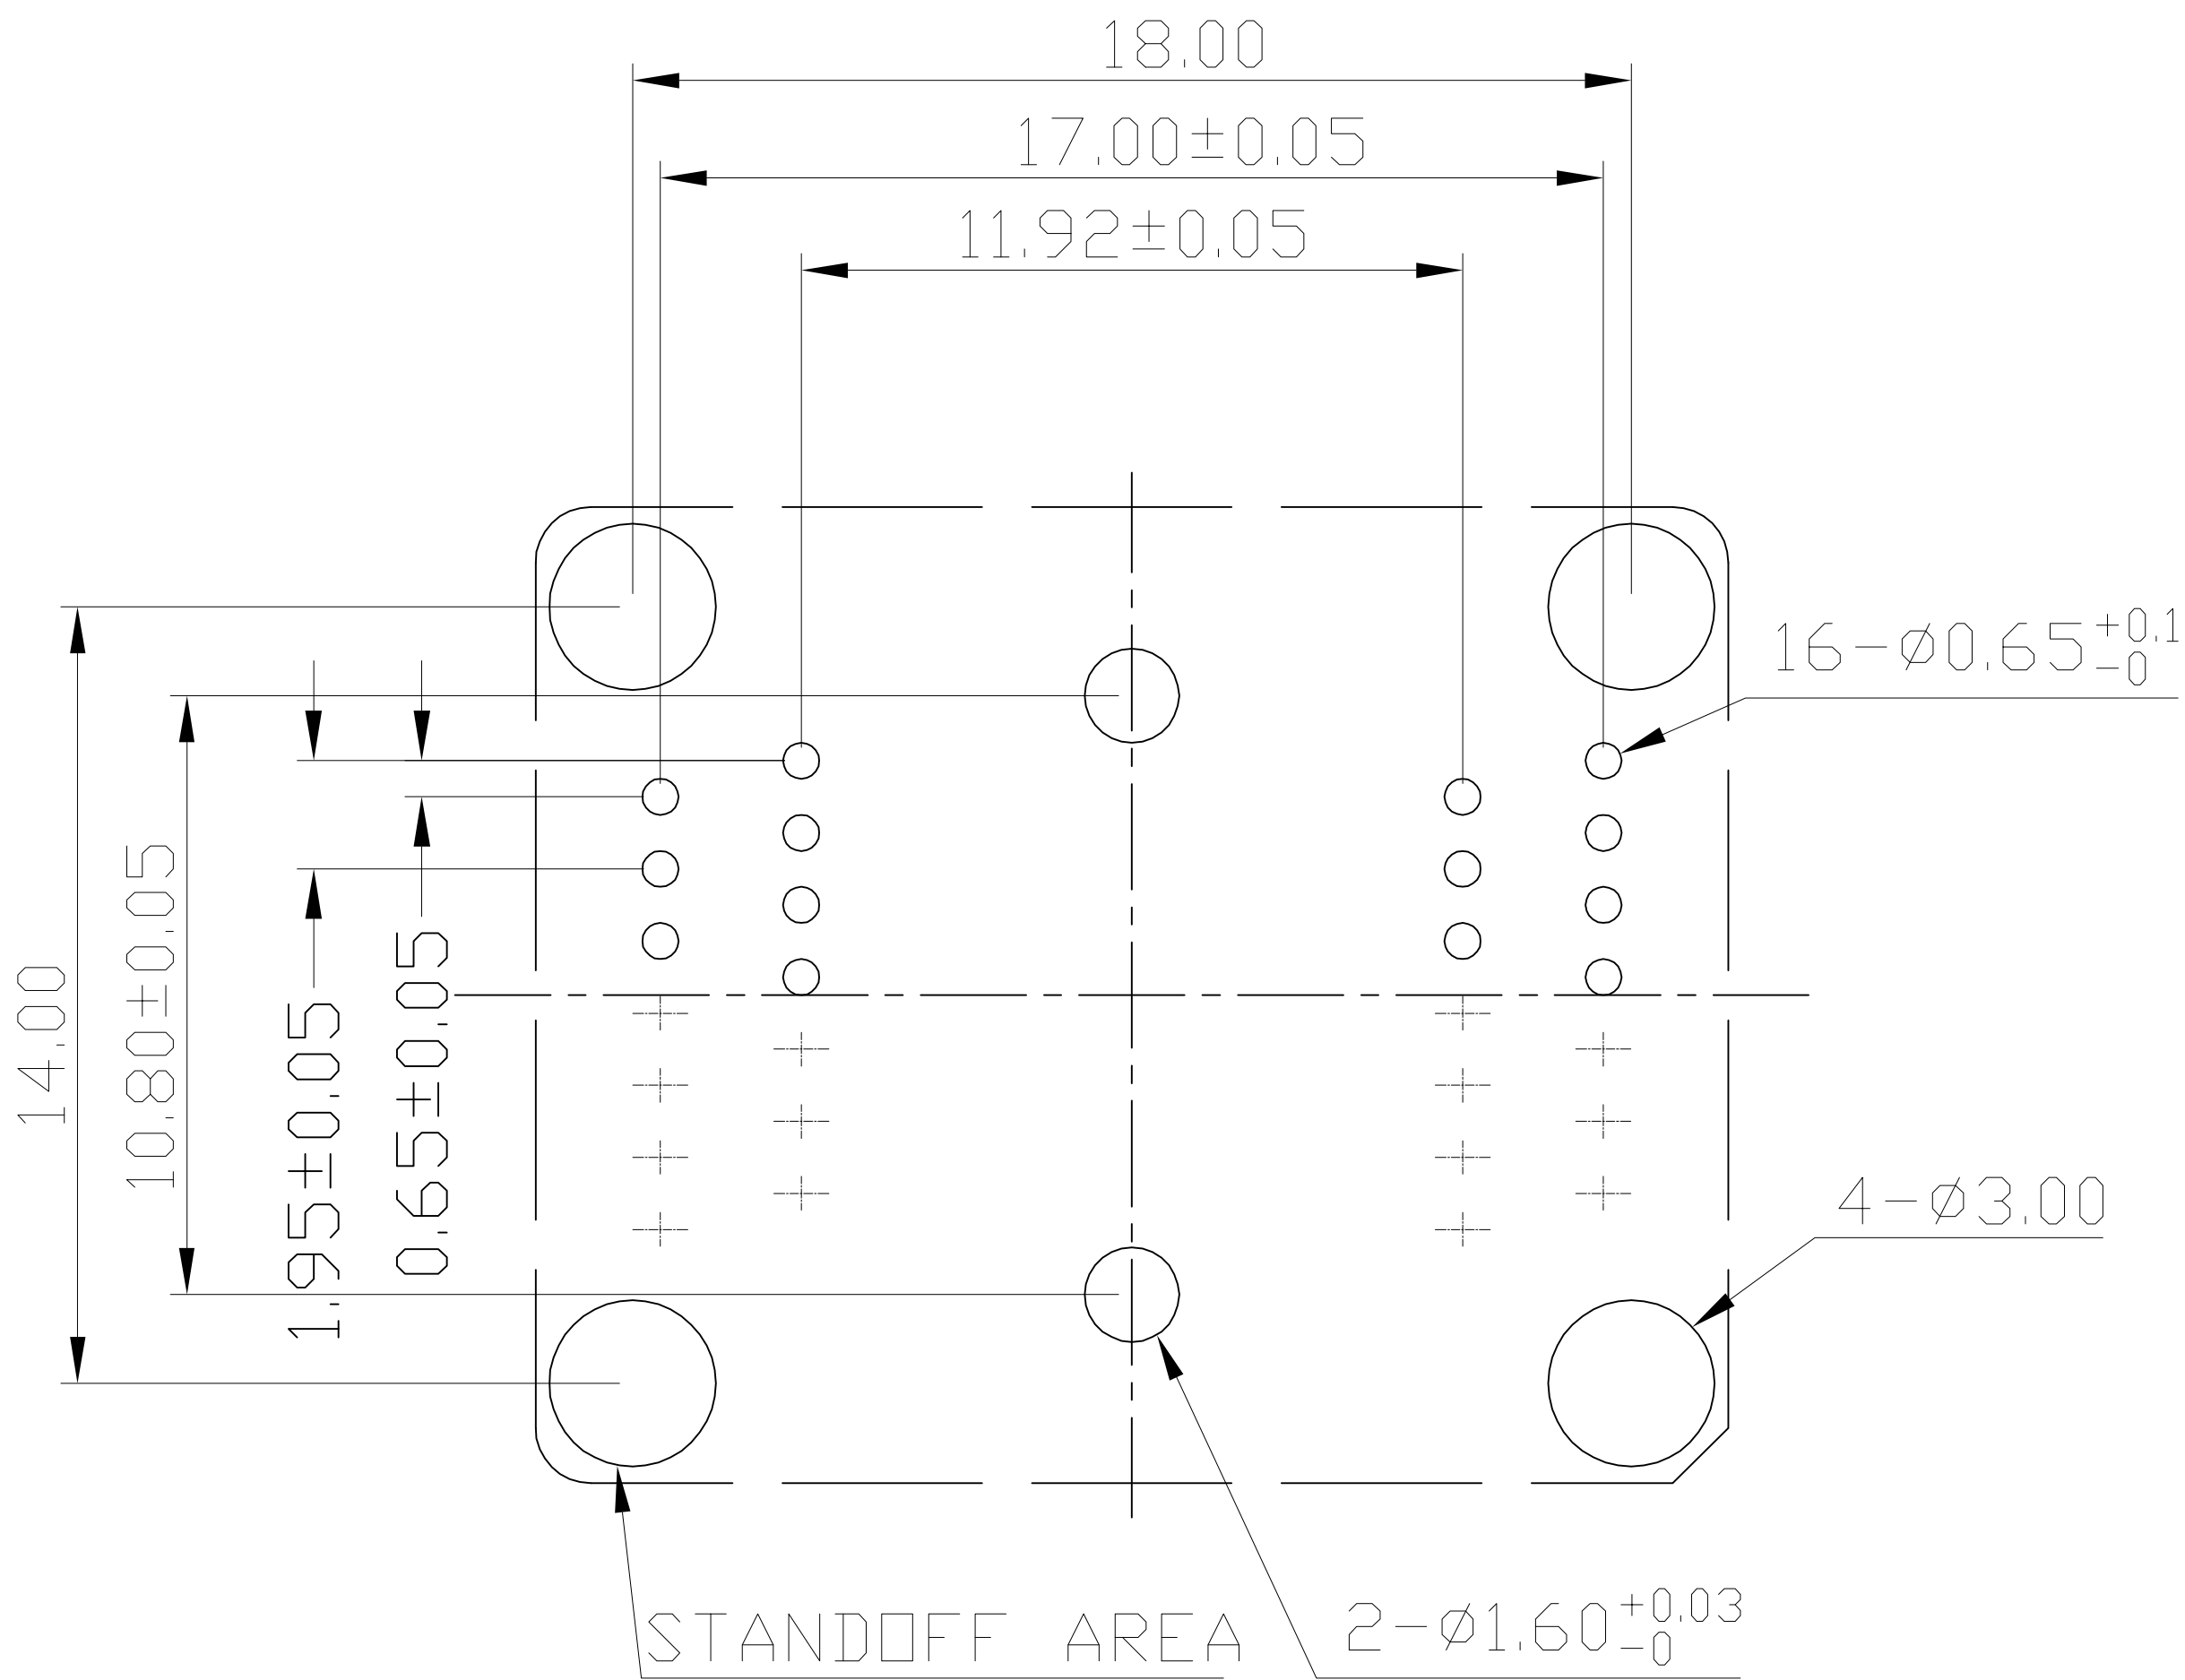

APPL ICABLE IC

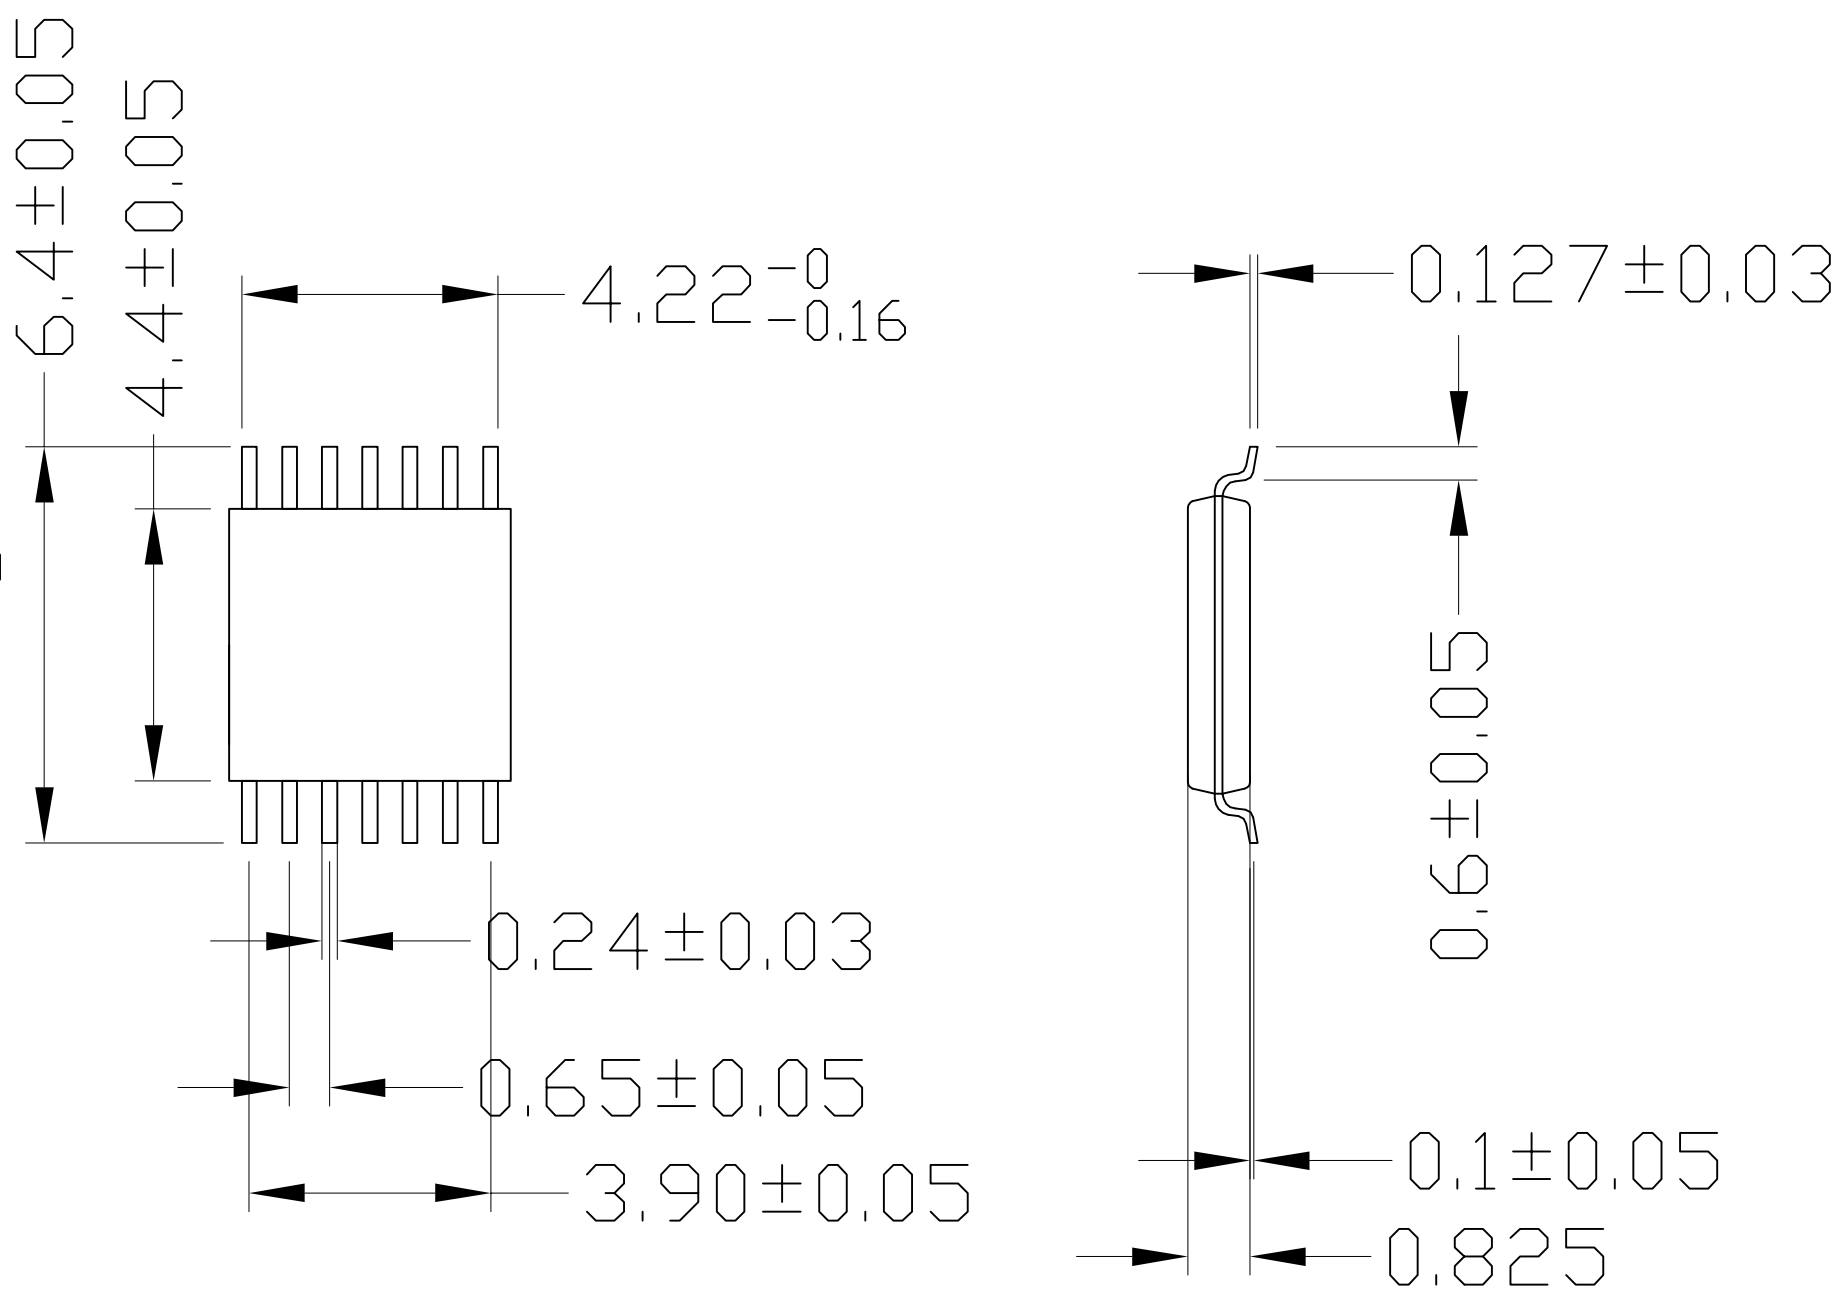

PERFORMANCE

- 1、Insulation Resistance: 1000m Ω Min.At DC 500V
- 2、Dielectric Withstanding Voltage For 1 Minute At AC 700V
- 3、Contact Resistance 30m Ω MAX.at 10mA and 20mV MAX.(Initial)
- 4、Current Rating: 1A max.
- 5、Operation Temperature -55℃ ~+175℃
- 6、Contact Force 5-8g Per Pin (Normal)
- 7、Life Span 15,000 Times (Mechanical)
- 8、Operation Force 1.0 Kg MAX

6	SDP-28-U01-003	ADAPTER	PEI/PES	1	BLACK
5	SDP-28-U01-002	COVER	PEI/PES	1	BLACK
4	30-B-4515X	SPRING	SUS	4	FOR COVER
3	SDP-28-U01-001	BASE	PEI/PES	1	BLACK
2	SDP-28-MSBR-02	CONTACT	BeCu	4	Au PLATING
1	SDP-28-MSBR-01	CONTACT	BeCu	4	Au PLATING
No	Part Number	Name	Material	Q/ty	Note

PROJECTION		GENERAL TOLERANCES	±0.10	TITLE	SOP28-0.65 SOCKET
		R E V	A	CLASS	SOP-14(28)-0.65-01
DIMENSION:	mm	SCALE:	1:1	DRW.NO	SOP-8/14/16/24/28-0.65-M01
APP:		DATE:			
CHECK:		DATE:			
DEGK:	ENG02	DATE:	20120829		