

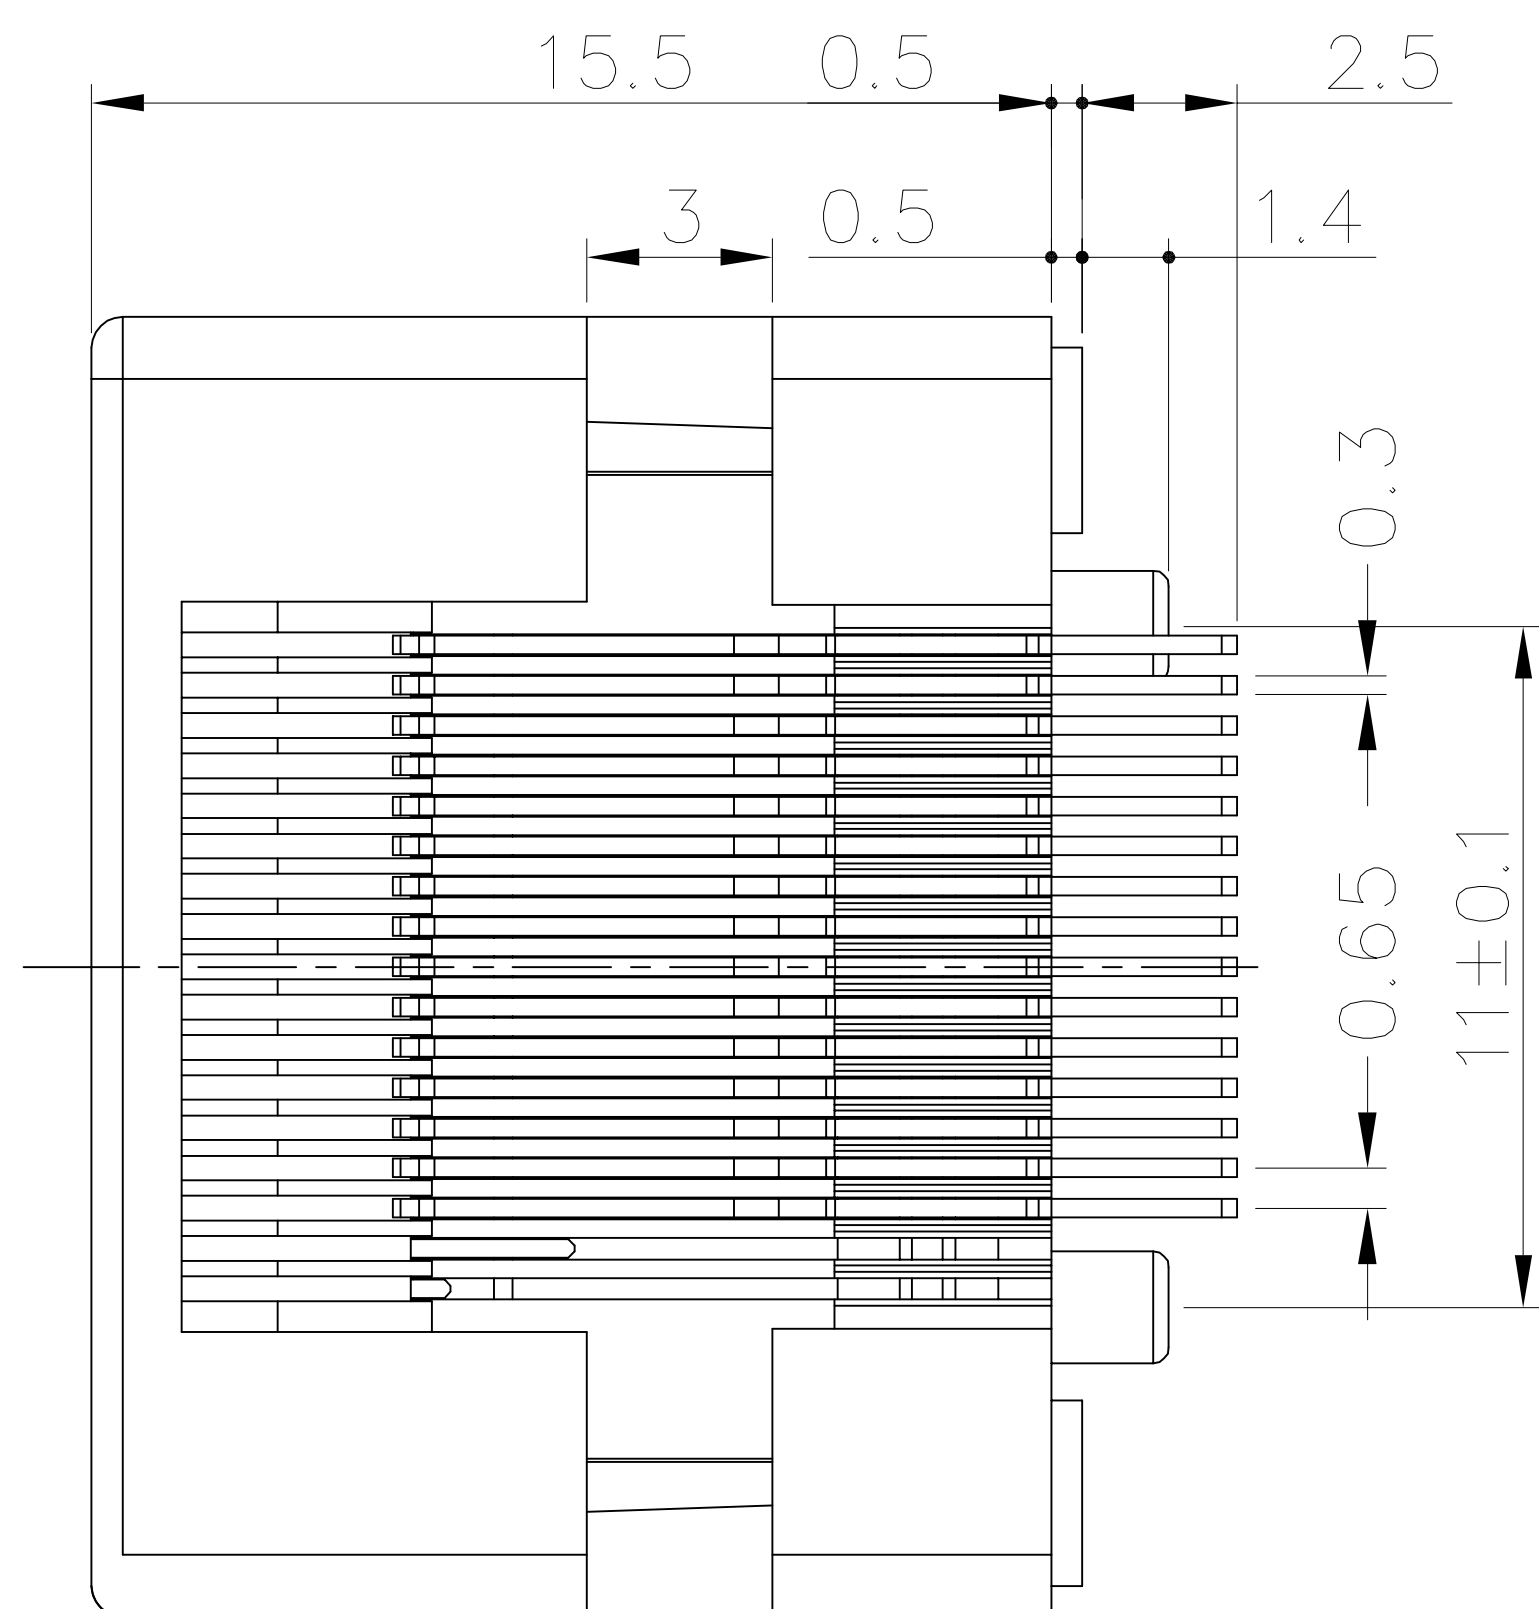
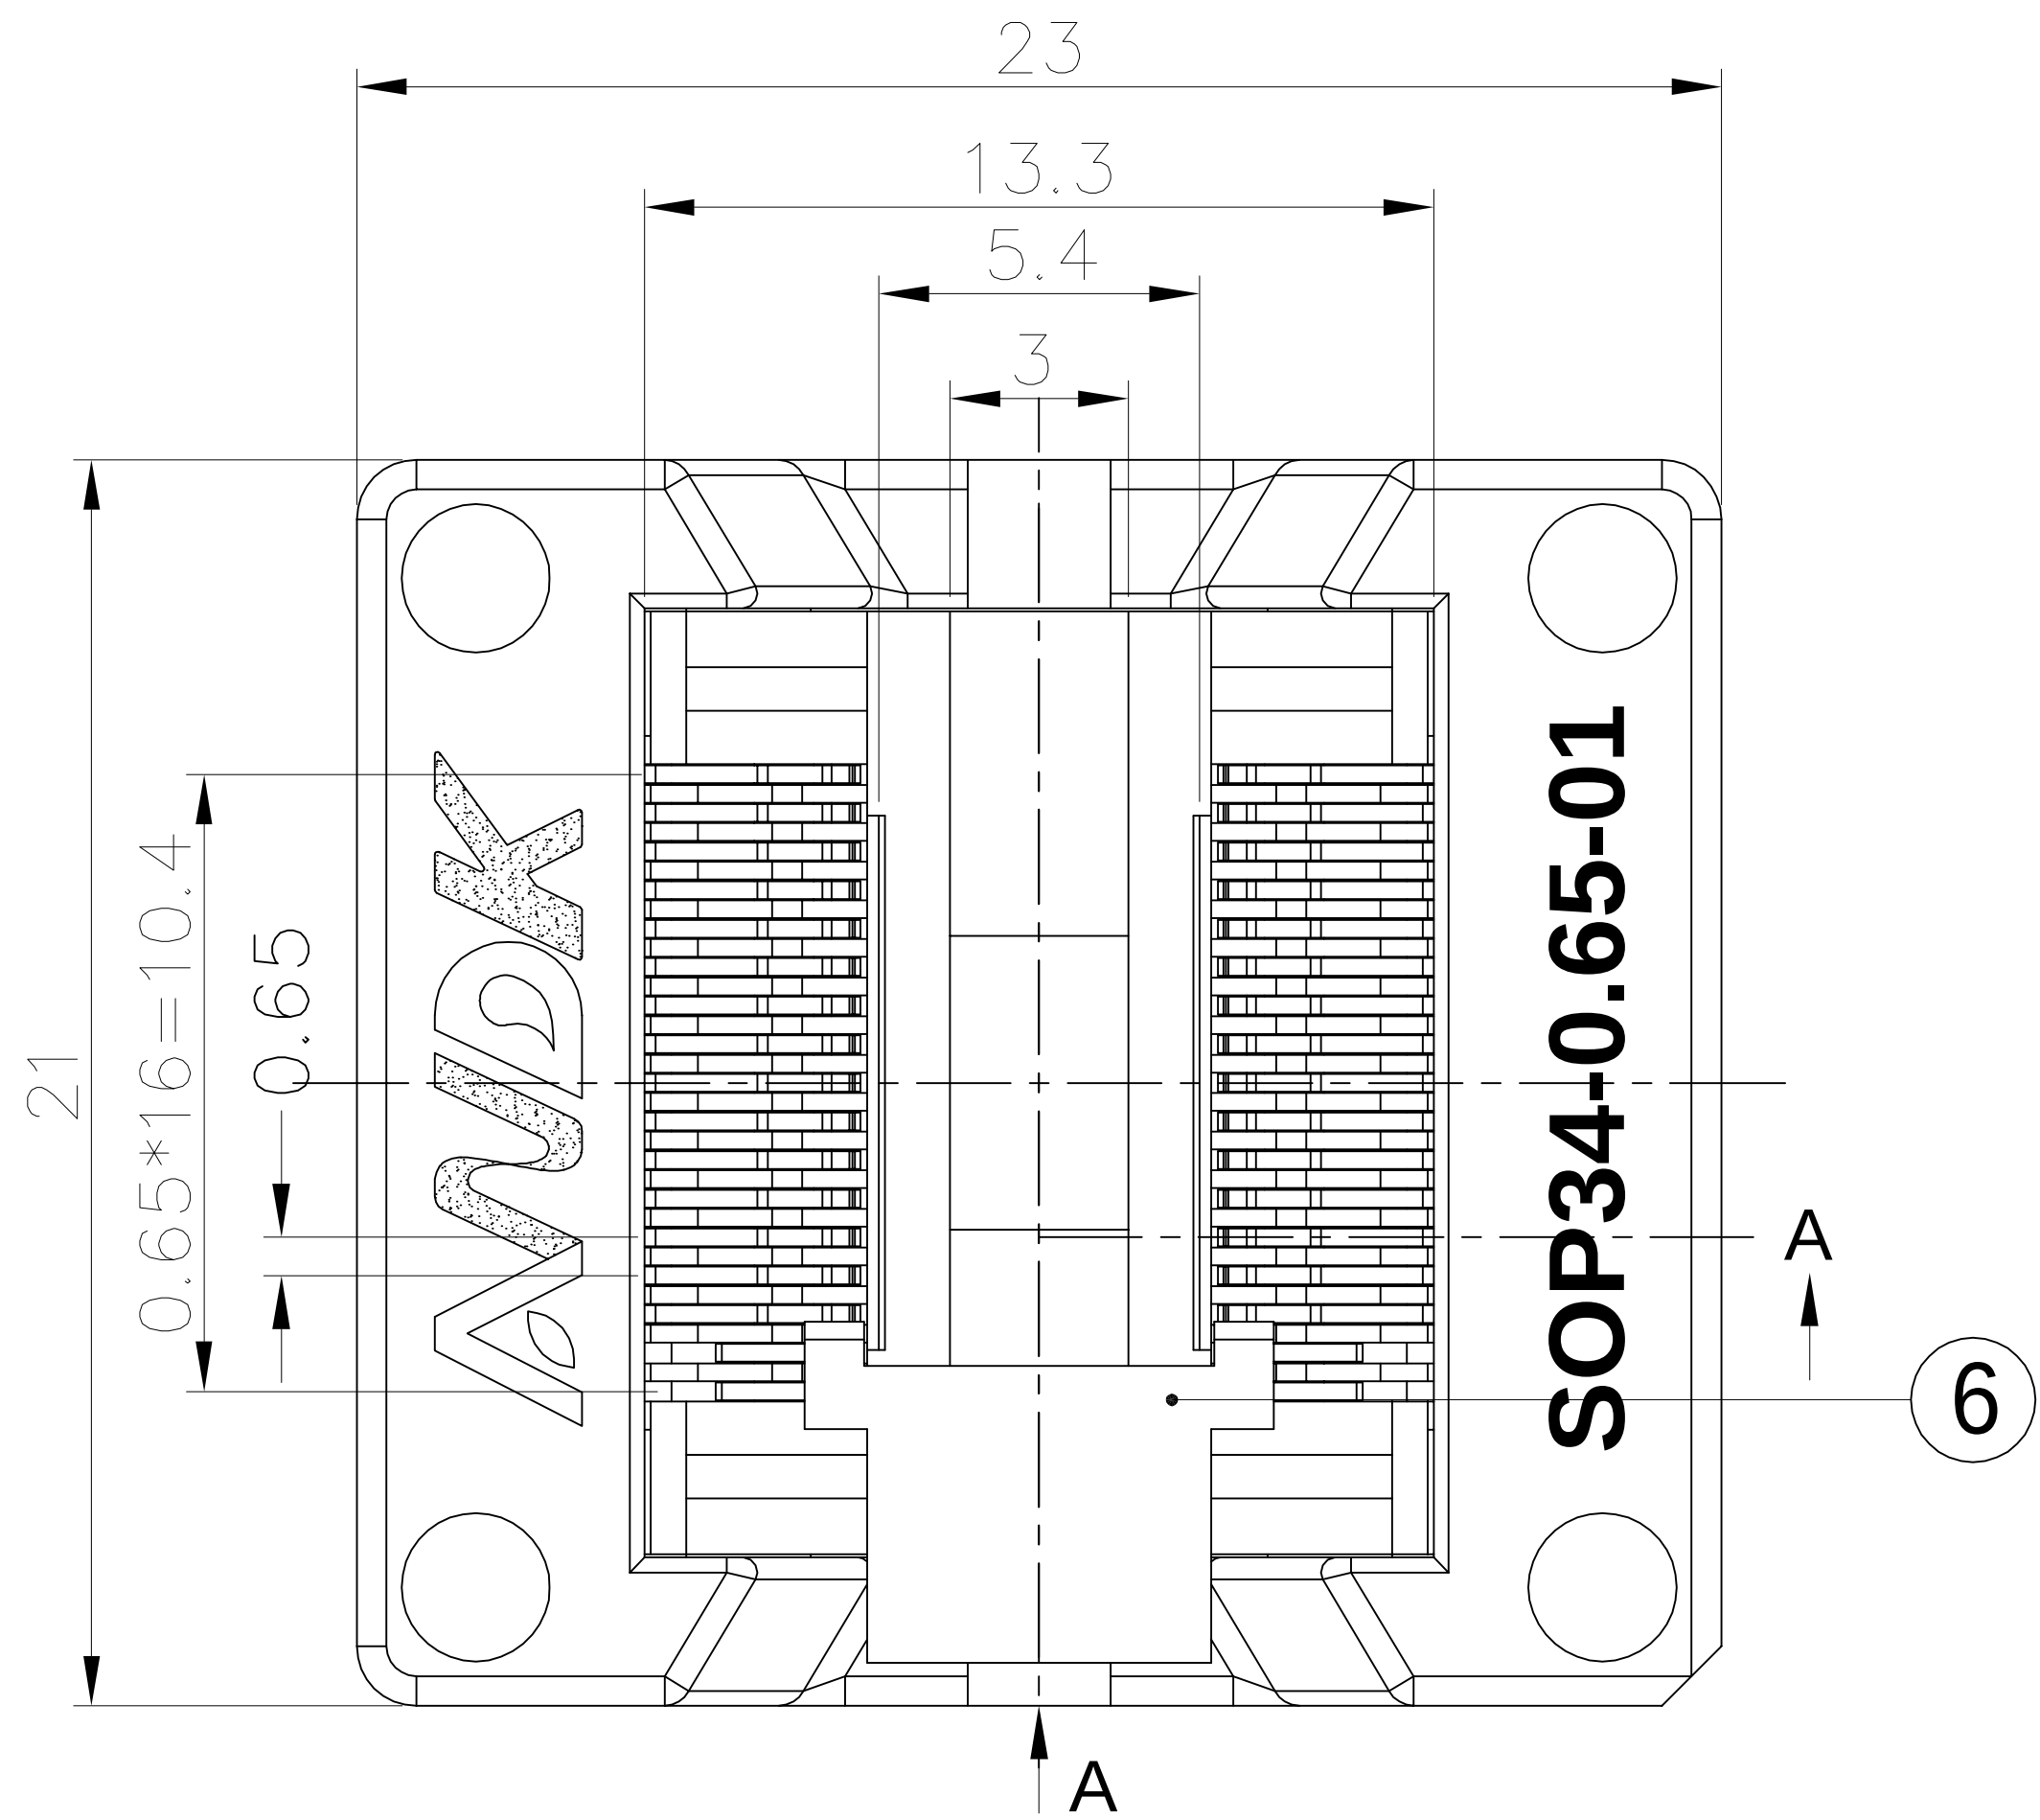


	REVISION	DESCRIPTION	CHECK APP	DATE	REV.NOTICE.NO
△ ₁					
△ ₂					
△ ₃					

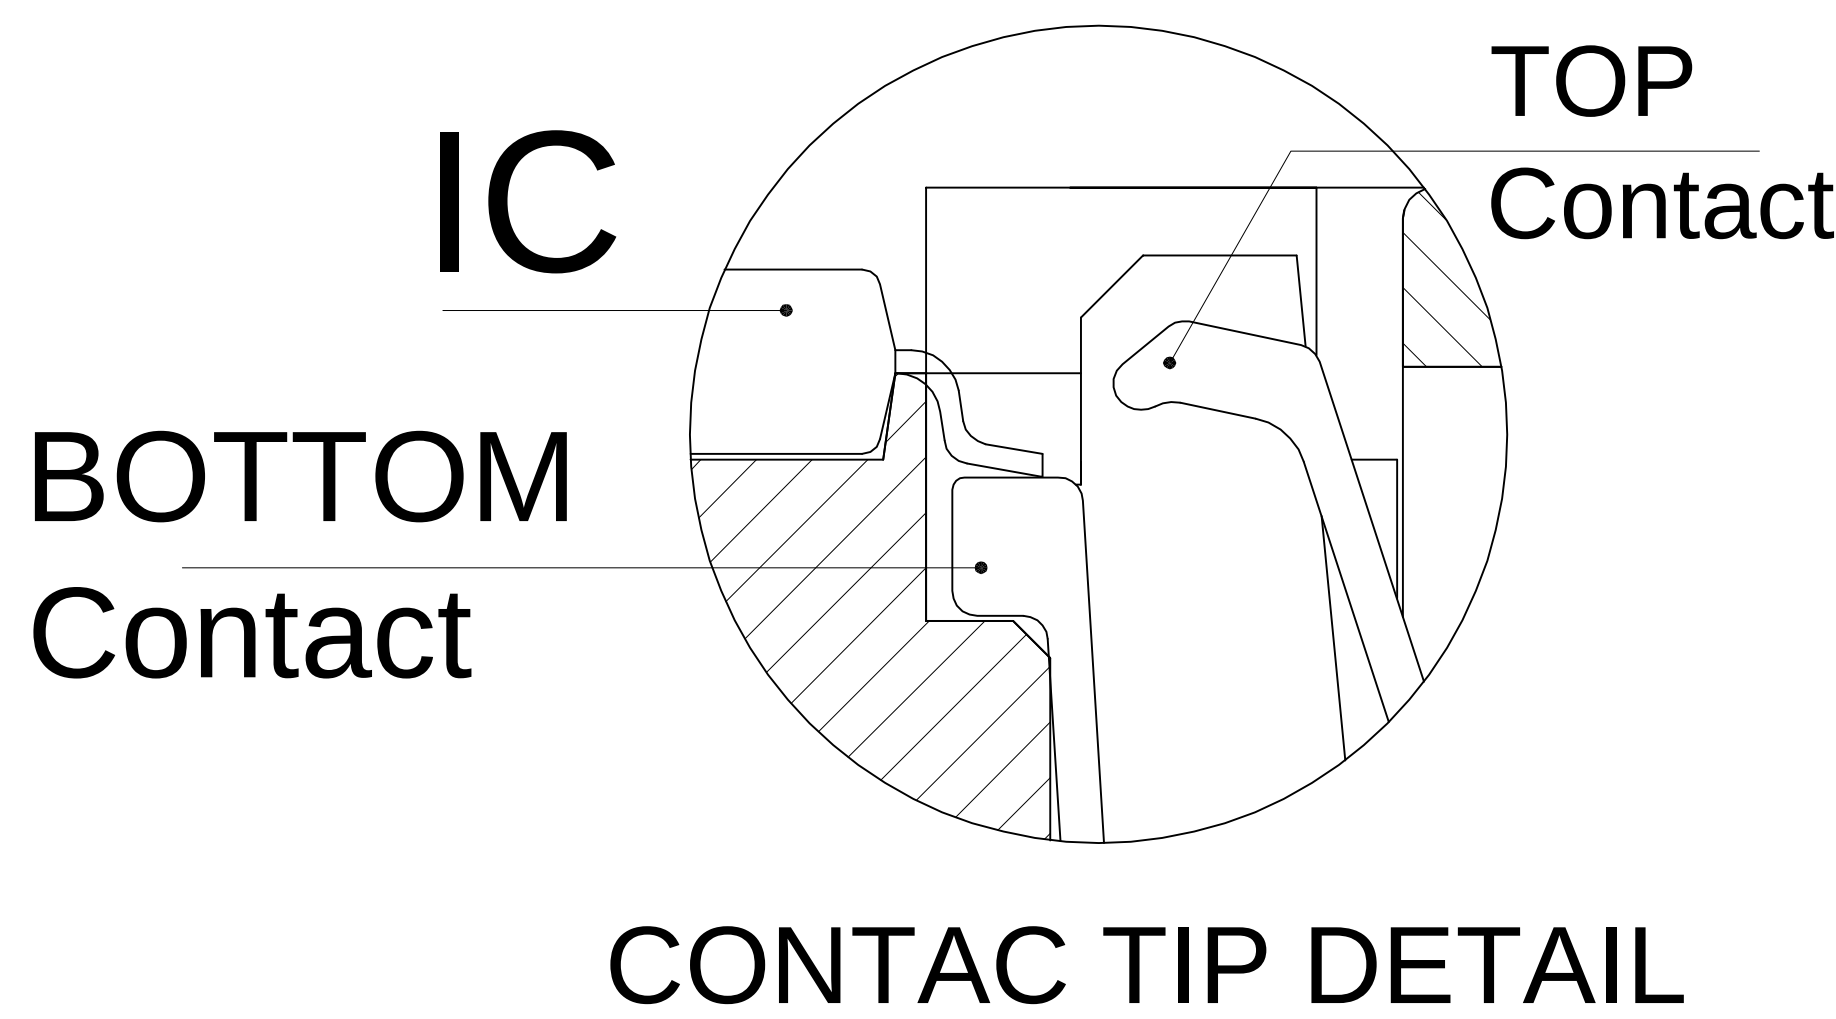

PCB PATTERN (TOP VIEW)

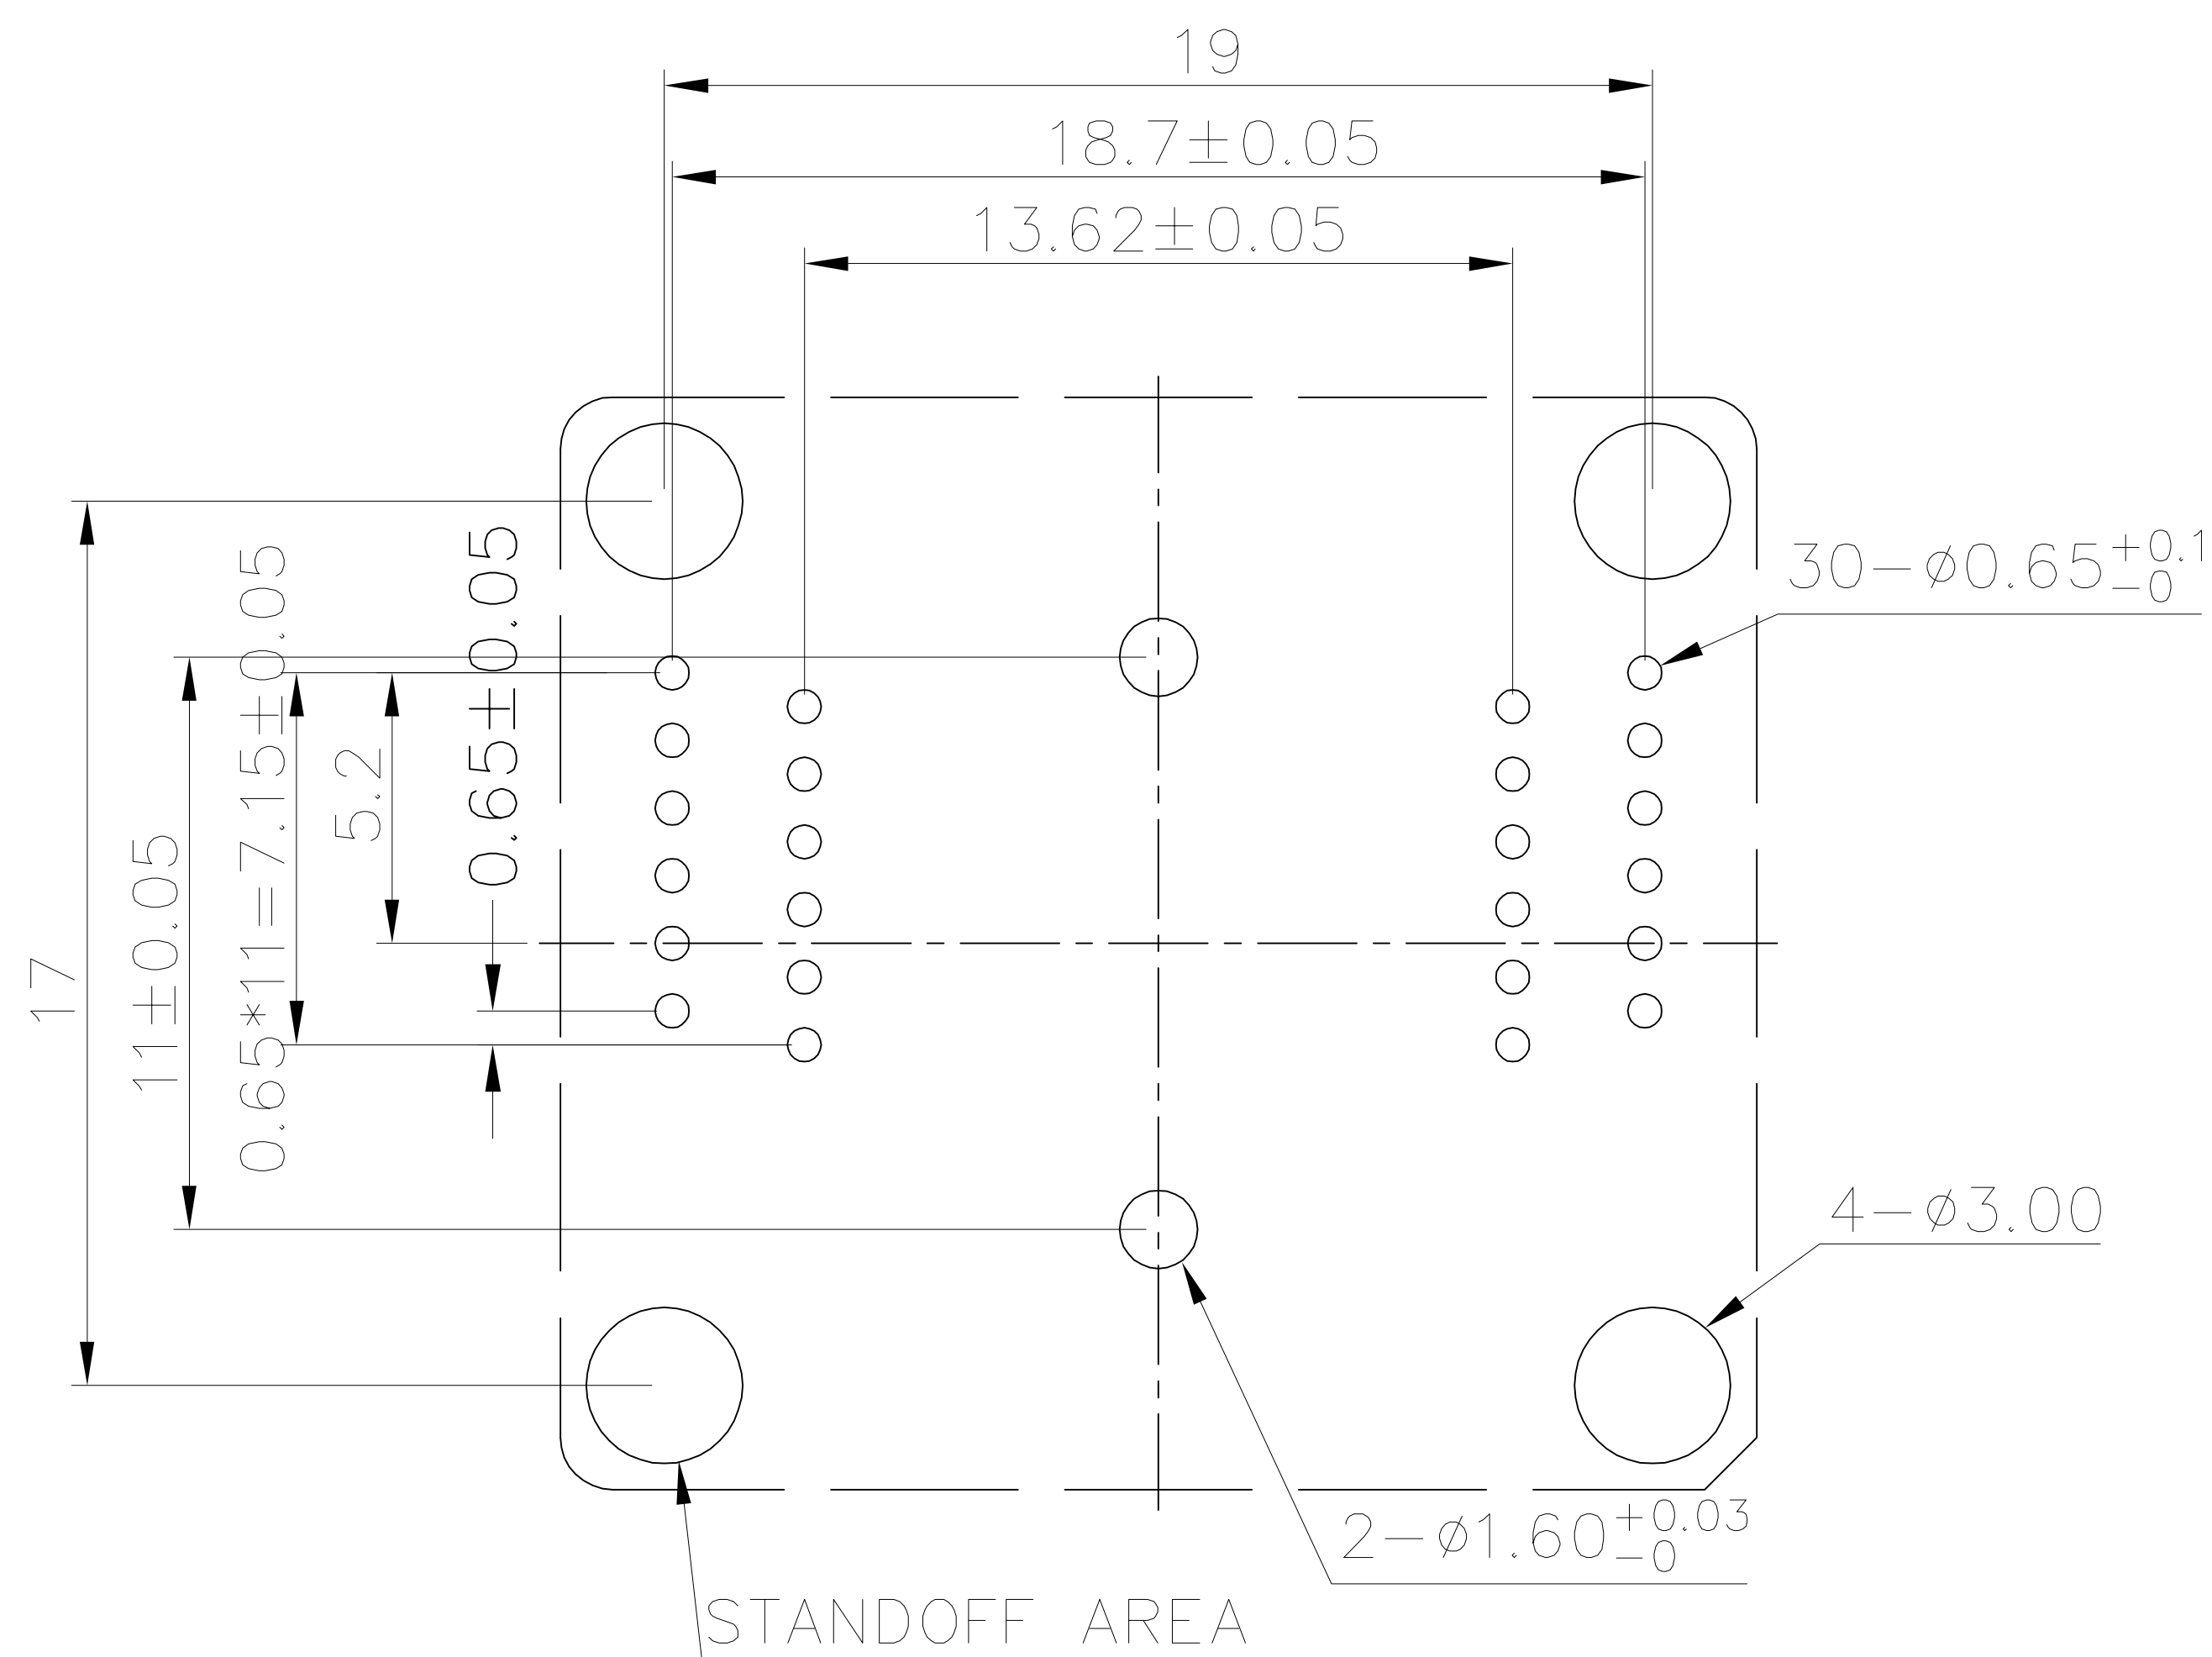


PERFORMANCE

- 1、Insulation Resistance: 1000m Ω Min.At DC 500V
- 2、Dielectric Withstanding Voltage For 1 Minute At AC 700V
- 3、Contact Resistance 30m Ω MAX. at 10mA and 20mV MAX.(Initial)
- 4、Current Rating: 1A max.
- 5、Operation Temperature -55℃ ~+175℃
- 6、Contact Force 5-8g Per Pin (Normal)
- 7、Life Span 15,000 Times (Mechanical)
- 8、Operation Force 1.0 Kg MAX

6	SOP-34-U01-003	ADAPTER	PEI/PES	1	BLACK
5	SOP-34-U01-002	COVER	PEI/PES	1	BLACK
4	30-B-4515X	SPRING	SUS	4	FOR COVER
3	SOP-34-U01-001	BASE	PEI/PES	1	BLACK
2	SOP-34-MSBR-02	CONTACT	BeCu	12	Au PLATING
1	SOP-34-MSBR-01	CONTACT	BeCu	12	Au PLATING
No	Part Number	Name	Material	Q/ty	Note

APPL ICABLE IC

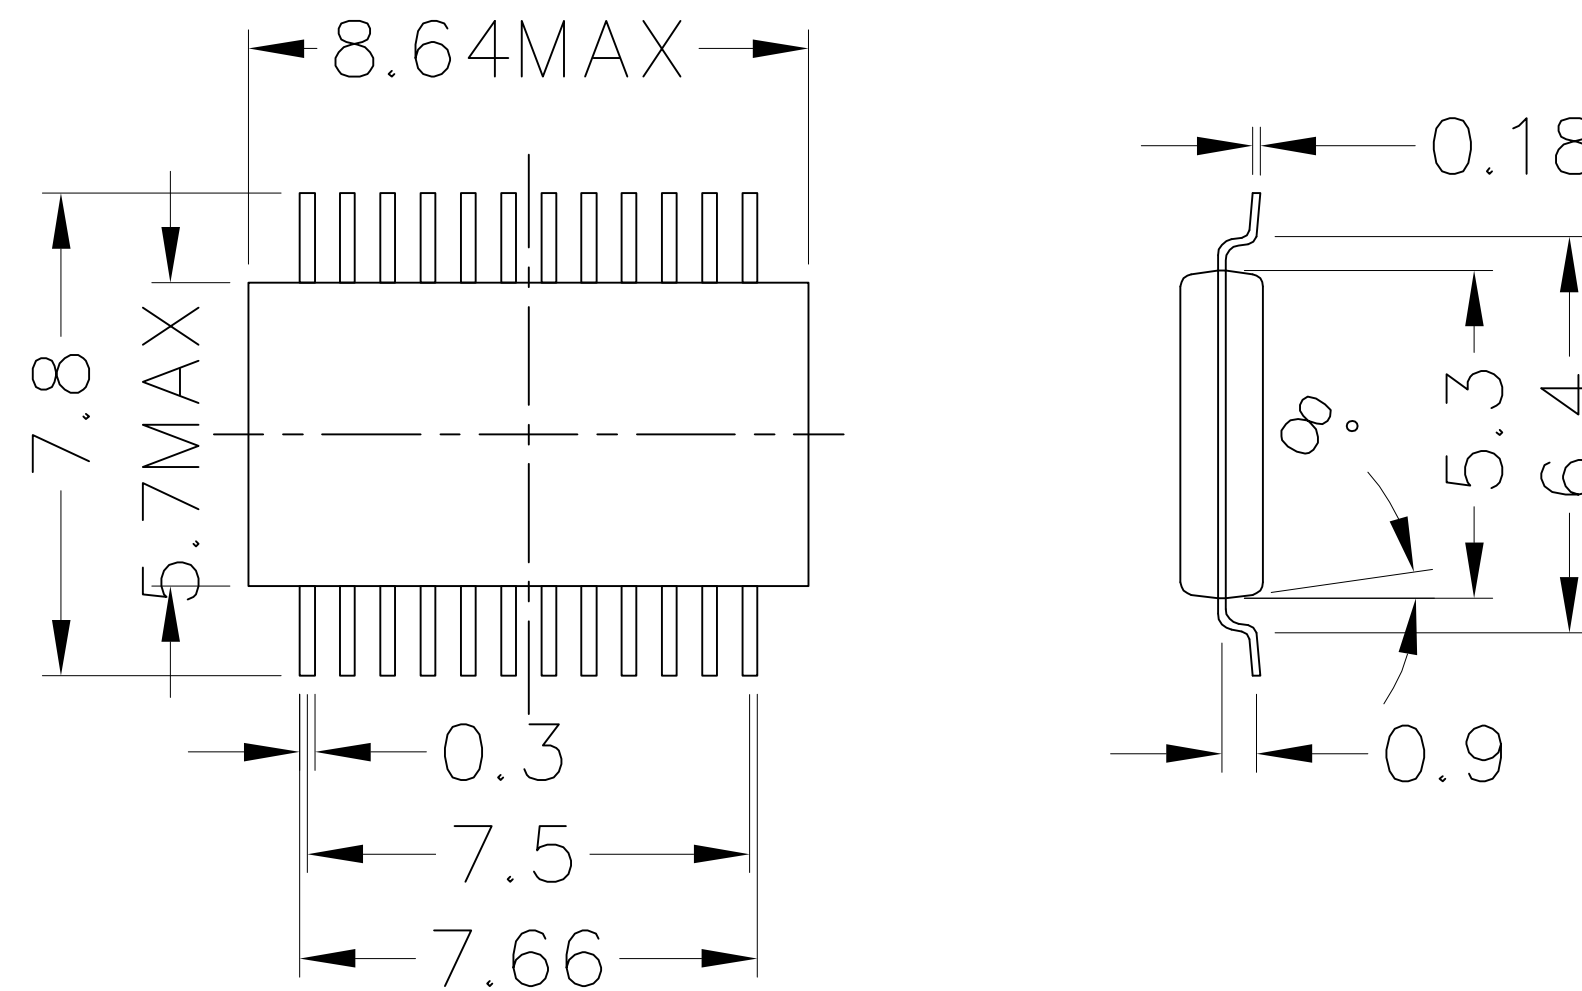

PROJECTION		GENERAL TOLERANCES ±0.10	TITLE	SOP34-0.65 SOCKET
		R E V A	CLASS	SOP-24(34)-0.65-01
DIMENSION:	mm	SCALE: 1:1	DRW.NO	SOP-24/28/30/34-0.65-L04
APP:		DATE:		
CHECK:		DATE:		
DEGK: ENG02		DATE: 20120829		

