

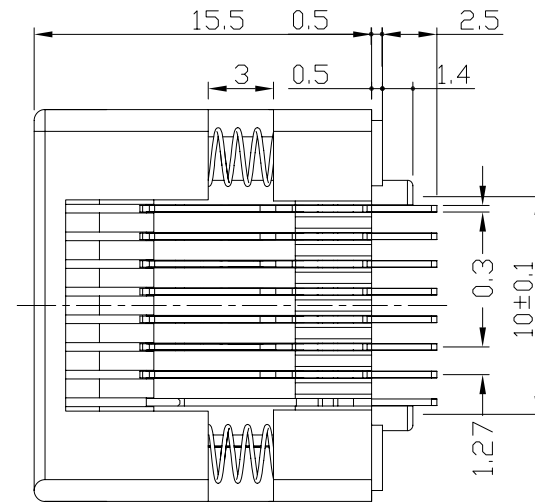
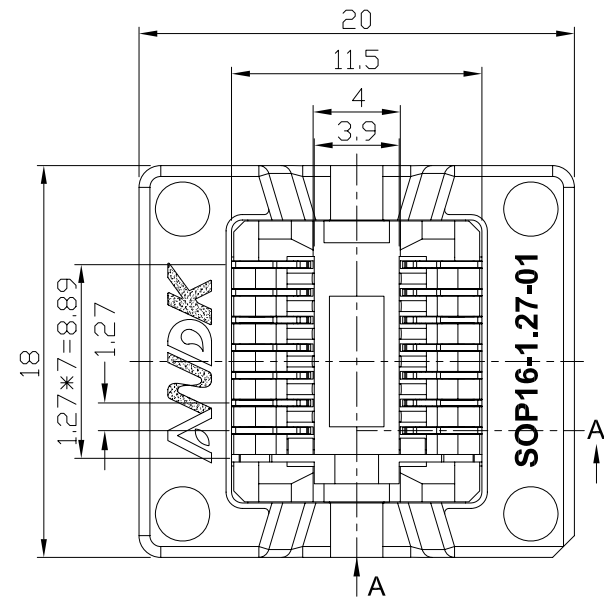
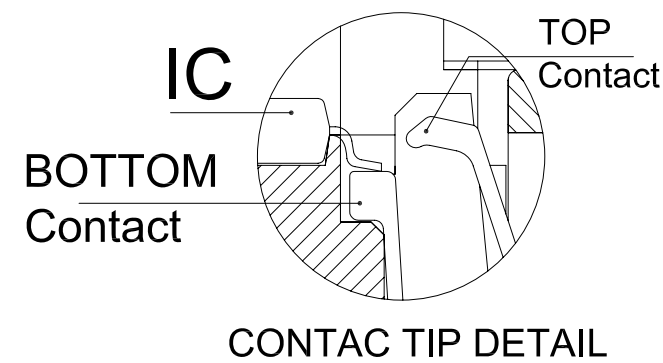


	REVISION DESCRIPTION	CHECK	APP	DATE	REV. NOTICE NO.
△ ₁					
△ ₂					
△ ₃					

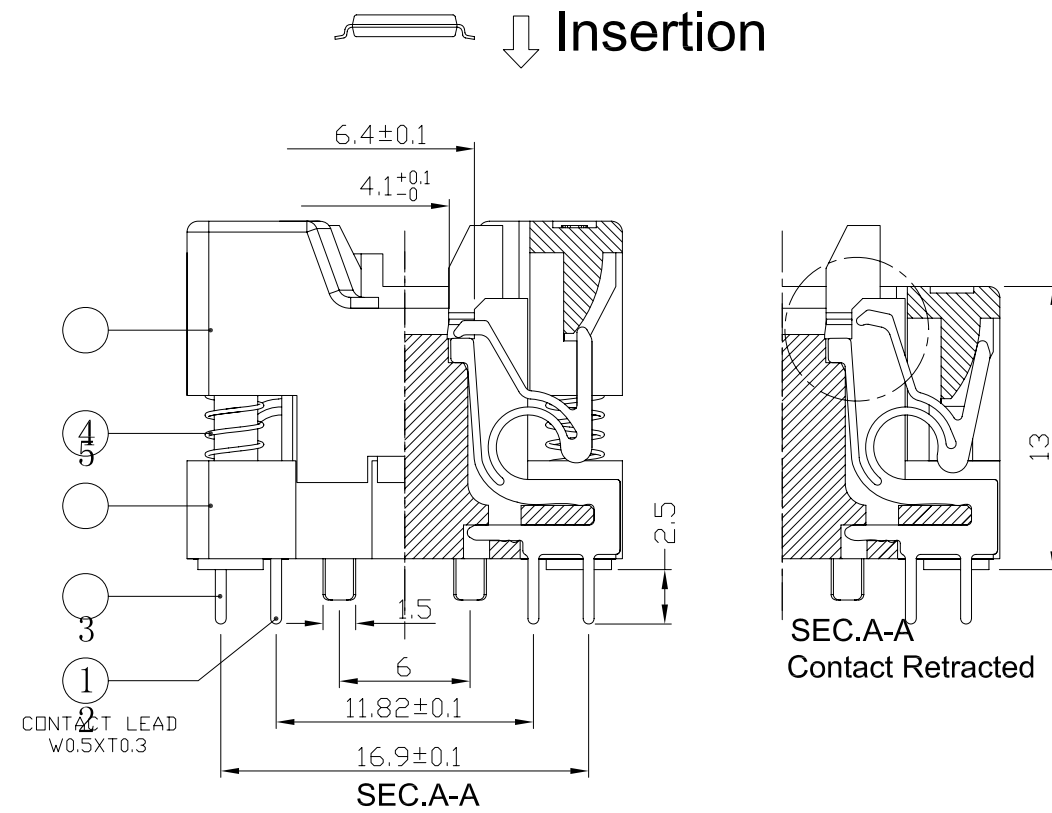


PCB PATTERN (TOP VIEW)


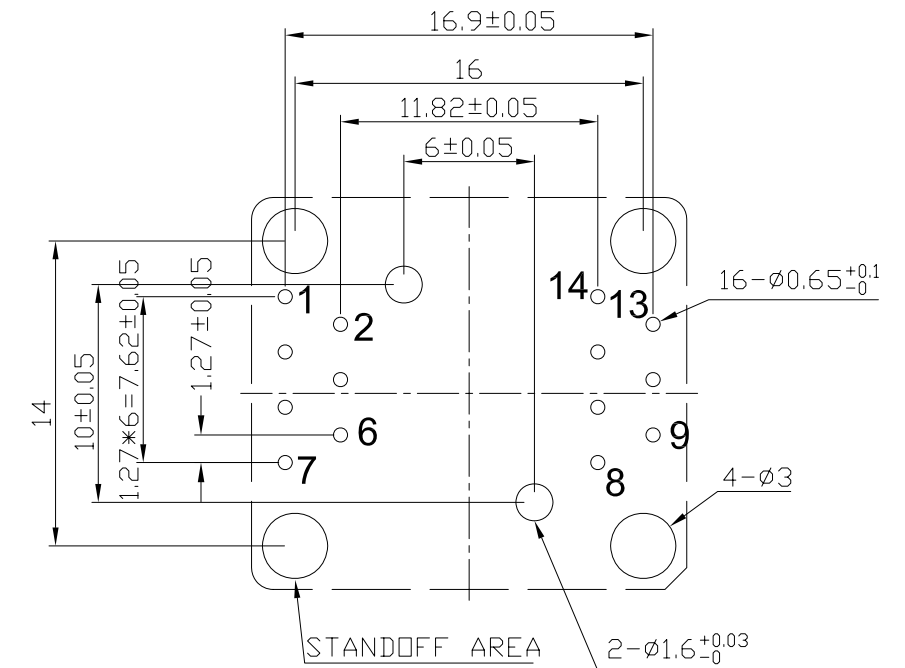


PERFORMANCE

- 1、Insulation Resistance: 1000m Ω Min.At DC 500V
- 2、Dielectric Withstanding Voltage For 1 Minute At AC 700V
- 3、Contact Resistance 30m Ω MAX. at 10mA and 20mV MAX.(Initial)
- 4、Current Rating: 1A max.
- 5、Operation Temperature -55°C ~+125°C
- 6、Life Span 15,000 Times (Mechanical)
- 7、Operation Force 1.0 Kg MAX

APPL ICABLE IC

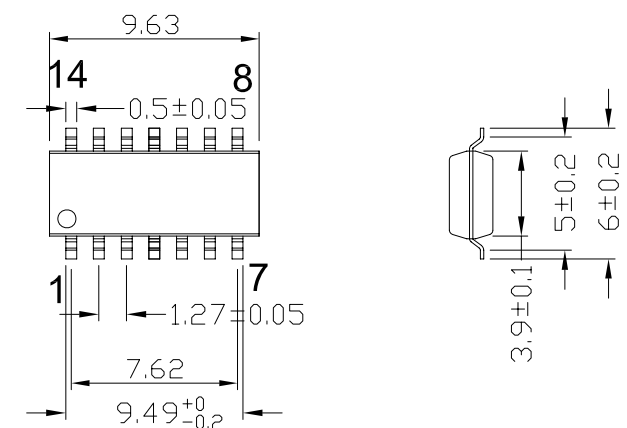

5	SOP-16-U01-002	COVER	PEI/PES	1	BLACK	TOLERANCE	PROJECTION		GENERAL TOLERANCES		±0.10	TITLE	SOP16-1.27 SOCKET	
4	30-B-4515X	SPRING	SUS	4	FOR COVER				R E V	A	CLASS	SOP14(16)-1.27-TP04NT		
3	SOP-16-U01-001	BASE	PEI/PES	1	BLACK				X. ± 0.50	DIMENSION: mm		SCALE: 1:1	DRW. NO	SOP-14/16-1.27-S01
2	SOP-16-MSBR-02	CONTACT	BeCu	7	Au PLATING				X.X ± 0.25	APP:		DATE:		
1	SOP-16-MSBR-01	CONTACT	BeCu	7	Au PLATING				X.XX ± 0.10	CHECK:		DATE:		
No	Part Number	Name	Material	Q/ty	Note	X.XXX ± 0.05	DEGK: ENG02		DATE: 20170318					