

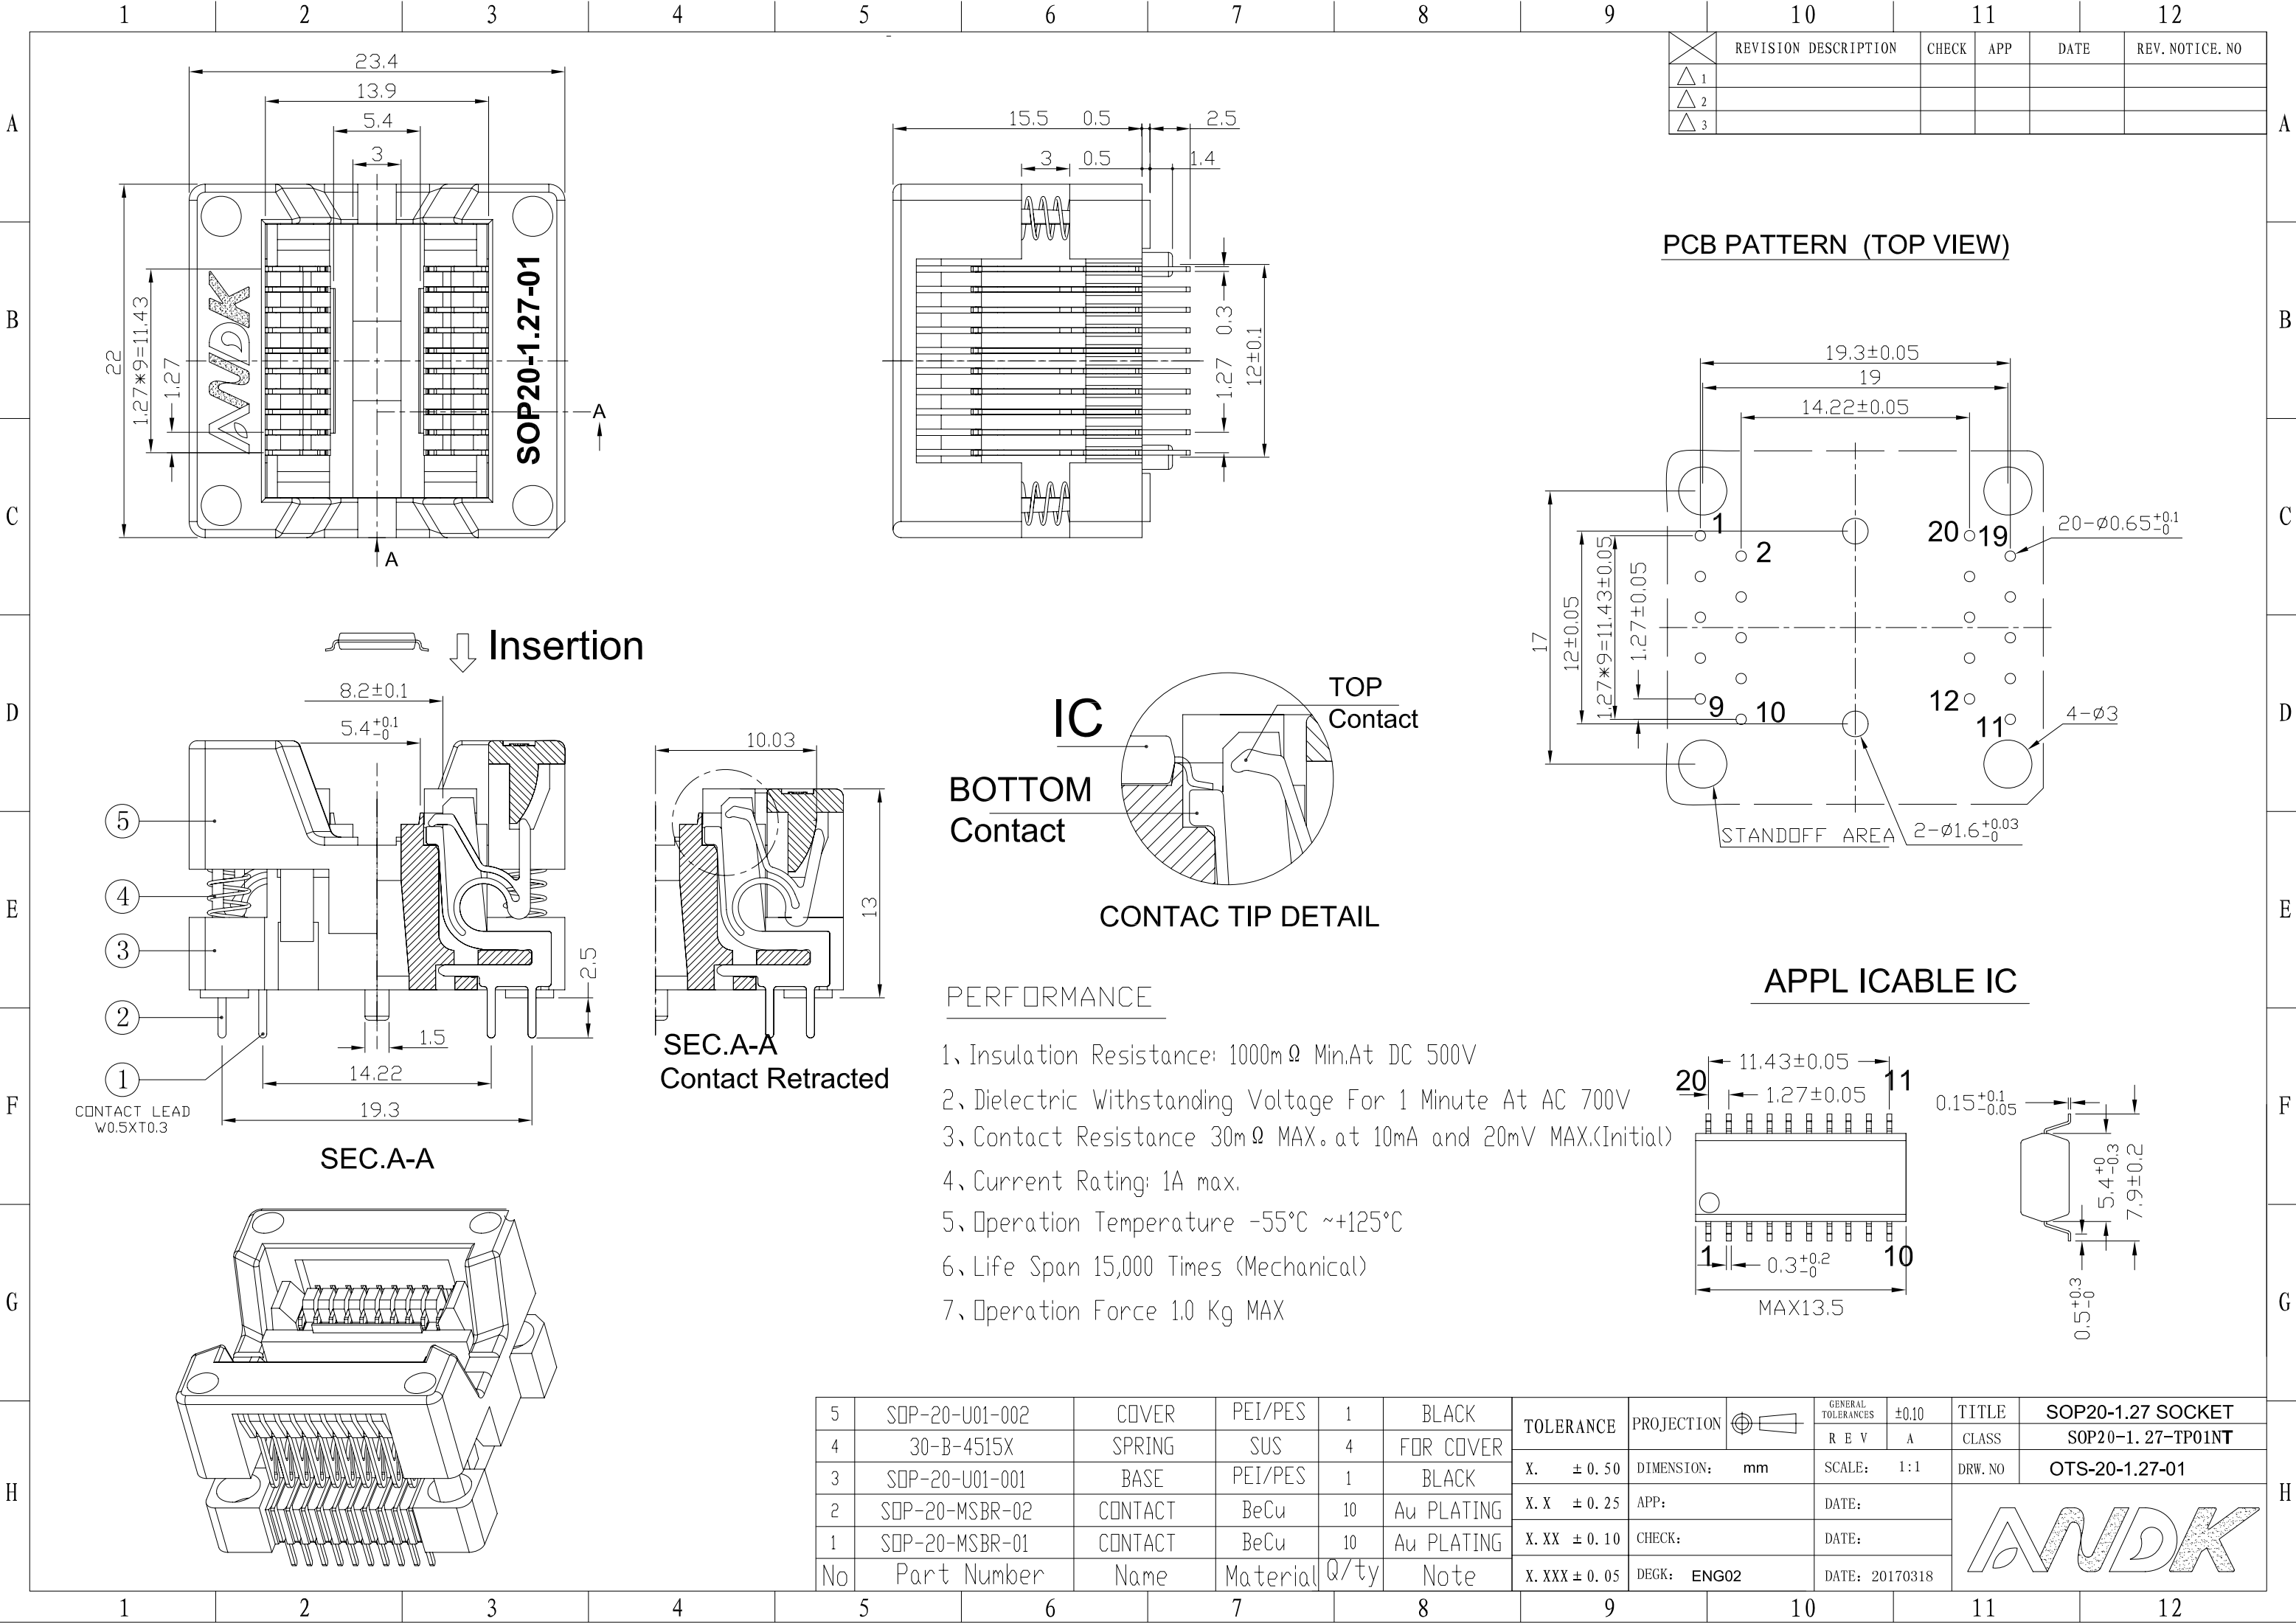


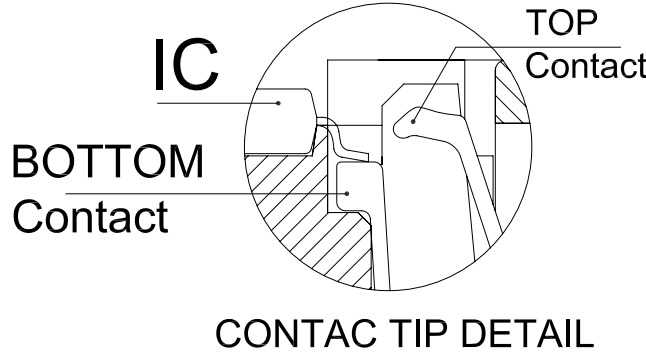

REVISION	DESCRIPTION	CHECK	APP	DATE	REV. NOTICE. NO
1					
2					
3					


PCB PATTERN (TOP VIEW)

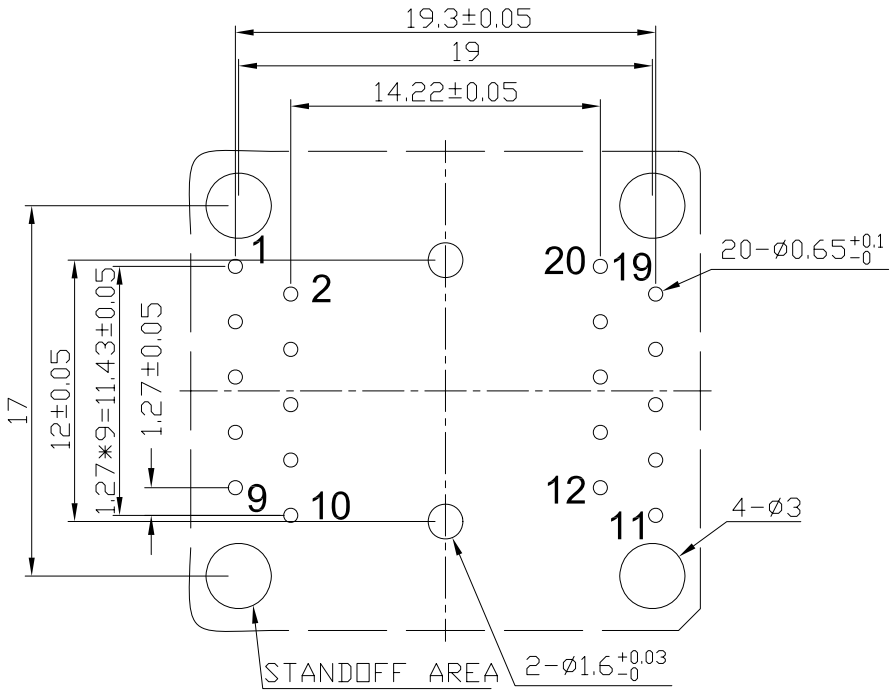

PERFORMANCE

1. Insulation Resistance: 1000mΩ Min.At DC 500V
2. Dielectric Withstanding Voltage For 1 Minute At AC 700V
3. Contact Resistance 30mΩ MAX. at 10mA and 20mV MAX.(Initial)
4. Current Rating: 1A max.
5. Operation Temperature -55°C ~+125°C
6. Life Span 15,000 Times (Mechanical)
7. Operation Force 1.0 Kg MAX

APPL ICABLE IC

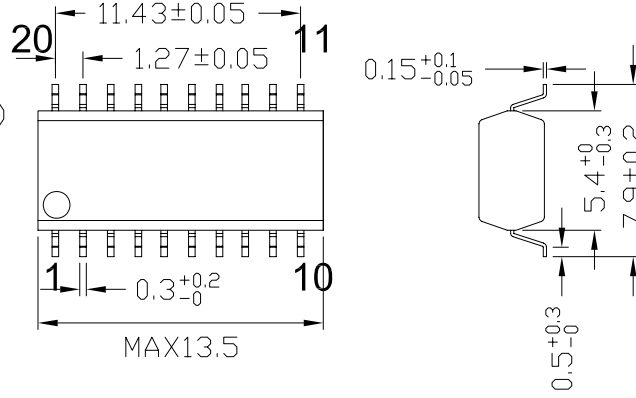

5	SOP-20-U01-002	COVER	PEI/PES	1	BLACK	TOLERANCE	PROJECTION		GENERAL TOLERANCES	±0.10	TITLE	SOP20-1.27 SOCKET
4	30-B-4515X	SPRING	SUS	4	FOR COVER	X. X	± 0. 50	DIMENSION: mm	R E V	A	CLASS	SOP20-1. 27-TP01NT
3	SOP-20-U01-001	BASE	PEI/PES	1	BLACK	X. XX	± 0. 25	APP:	SCALE: 1:1	DRW. NO	OTS-20-1.27-01	
2	SOP-20-MSBR-02	CONTACT	BeCu	10	Au PLATING	X. XXX	± 0. 10	CHECK:	DATE:			
1	SOP-20-MSBR-01	CONTACT	BeCu	10	Au PLATING			DEGK: ENG02	DATE: 20170318			
No	Part Number	Name	Material	Q/ty	Note							

