

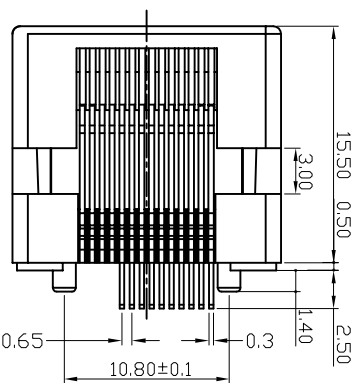



REVISION	DESCRIPTION	CHECK APP	DATE	REV/NOTICE NO
Δ1				
Δ2				
Δ3				

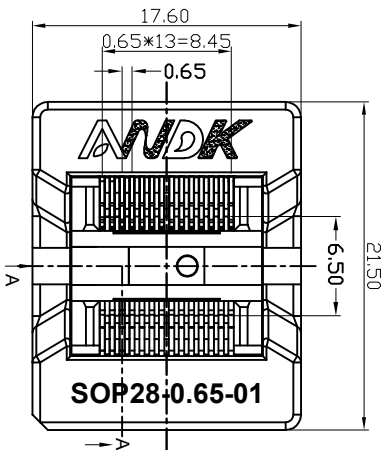


PCB PATTERN (TOP VIEW)

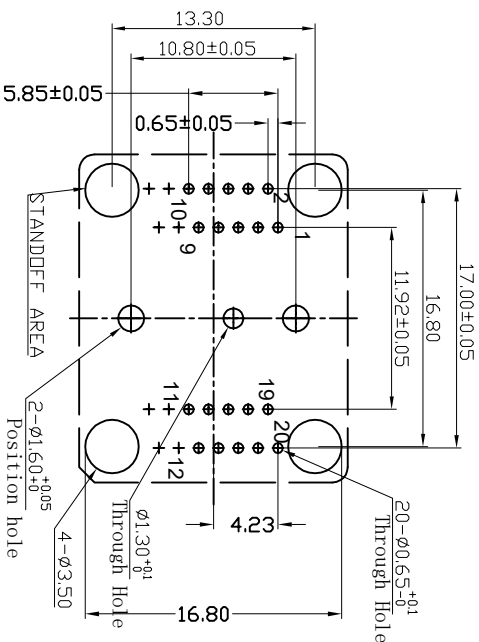

Insertion

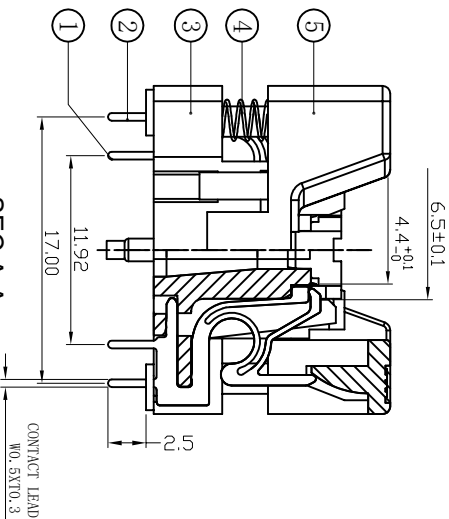


SEC.A-A

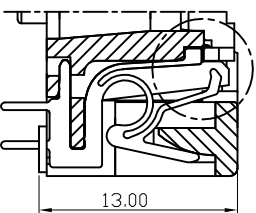

SEC.A-A

Contact Retracted

CONTACT TIP DETAIL

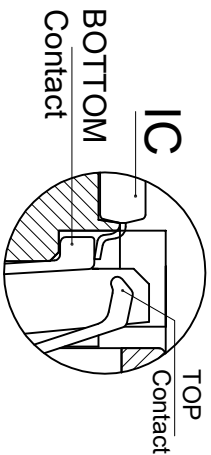


PERFORMANCE


- 1, Insulation Resistance: 1000MΩ Min.At DC 500V
- 2, Dielectric Withstanding Voltage For 1 Minute At AC 700V
- 3, Contact Resistance 50mΩ MAX. at 10mA and 20mV MAX.(Initial)
- 4, Current Rating: 1A max.
- 5, Operation Temperature -55°C ~+155°C
- 6, Life Span 15,000 Times (Mechanical)
- 7, Operation Force 1.0 Kg MAX

APPLICABLE IC

TOP VIEW

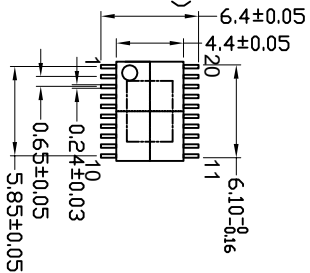

SIDE VIEW

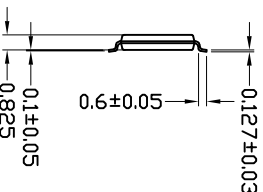

No	Part No.	Part name	Material	QTY	TIPS	TOLERANCE	PROJECTION	GENERAL TOLERANCES	REVISION	CLASS	DRW. NO	TITLE
5	SOP-28-101-002	Lid	PEI/PES	1	Black			±0.10				SOP28-0.65 SOCKET
4	10-B-2007	Spring	SUS	4	Silver	X. ±0.50		A				SOP20 (28)-0.65-TF02GT
3	SOP-28-101-001	Body	PEI/PES	1	Black	X. ±0.25	DIMENSION:	SCALE: 1:1				OTS-20(28)-0.65-01A
2	SOP-28-MSR-02	Spring	BeCu	10	Gold	X.XX ±0.10	APP:	DATE:				
1	SOP-28-MSR-01	Spring	BeCu	10	Gold	X.XX ±0.10	CHECK:	DATE:				
No	Part No.	Part name	Material	QTY	TIPS	X.XXX±0.05	DECK: ENG03	DATE: 20230703				

