

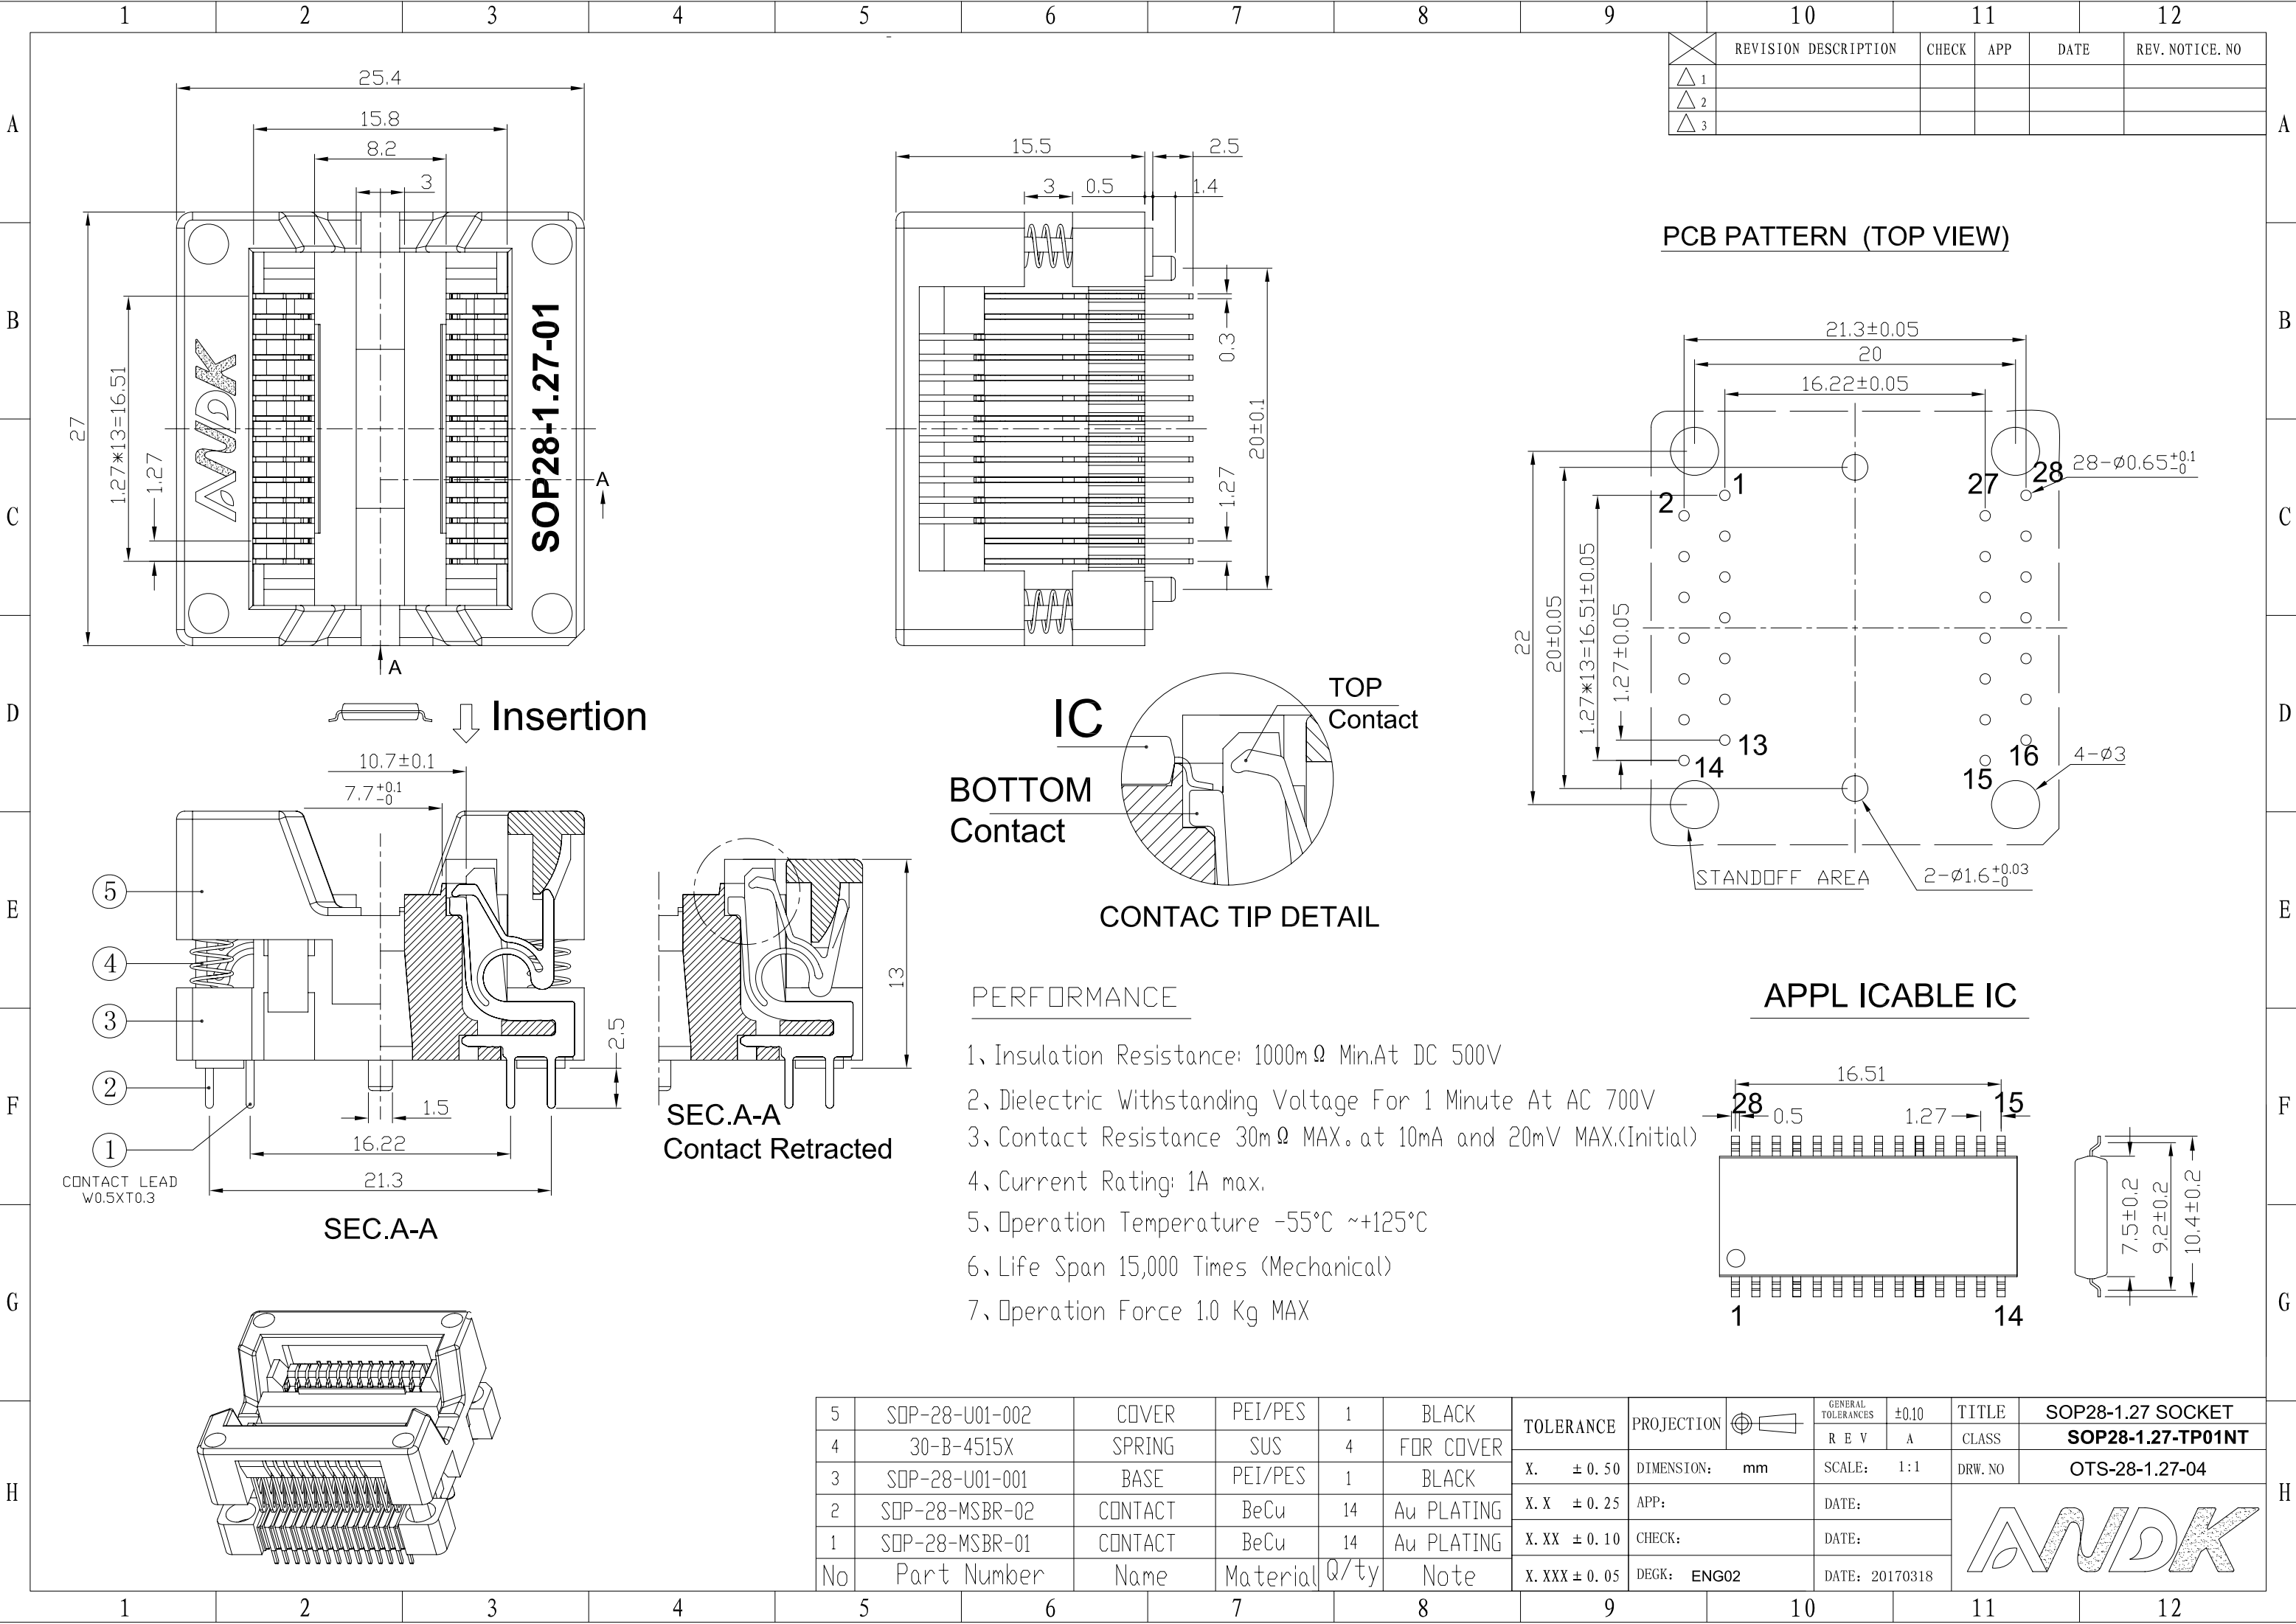


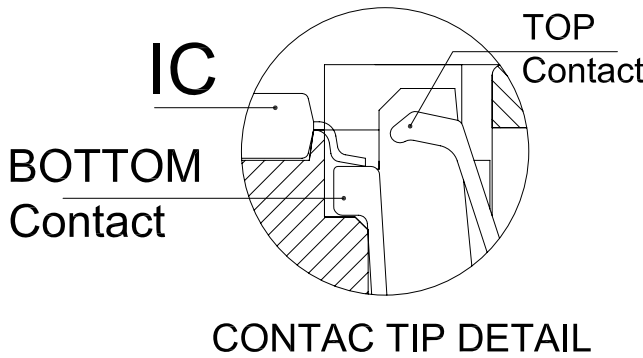

	REVISION	DESCRIPTION	CHECK	APP	DATE	REV. NOTICE NO
△ 1						
△ 2						
△ 3						


PCB PATTERN (TOP VIEW)

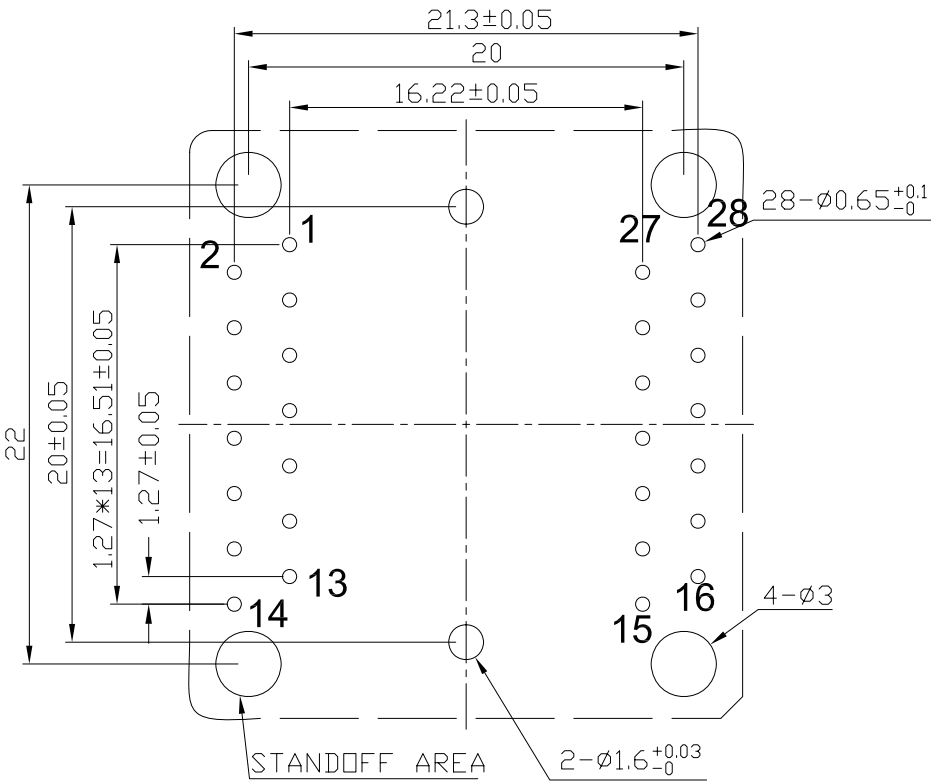

PERFORMANCE

1. Insulation Resistance: 1000mΩ Min.At DC 500V
2. Dielectric Withstanding Voltage For 1 Minute At AC 700V
3. Contact Resistance 30mΩ MAX.at 10mA and 20mV MAX.(Initial)
4. Current Rating: 1A max.
5. Operation Temperature -55℃ ~+125℃
6. Life Span 15,000 Times (Mechanical)
7. Operation Force 1.0 Kg MAX

APPL ICABLE IC

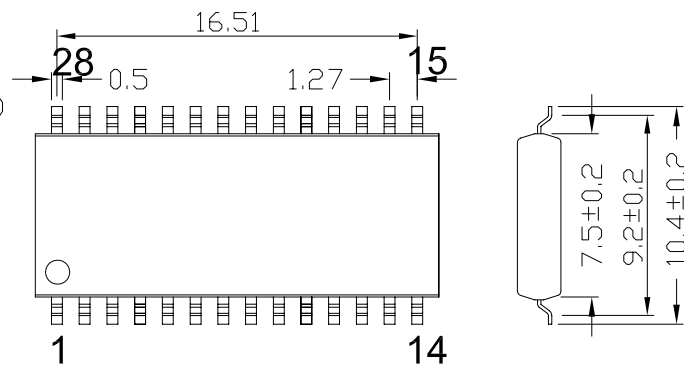

5	SOP-28-U01-002	COVER	PEI/PES	1	BLACK	TOLERANCE	PROJECTION		GENERAL TOLERANCES	±0.10	TITLE	SOP28-1.27 SOCKET
4	30-B-4515X	SPRING	SUS	4	FOR COVER				R E V	A	CLASS	SOP28-1.27-TP01NT
3	SOP-28-U01-001	BASE	PEI/PES	1	BLACK	X. ± 0.50	DIMENSION:	mm	SCALE:	1:1	DRW. NO	OTS-28-1.27-04
2	SOP-28-MSBR-02	CONTACT	BeCu	14	Au PLATING	X. X ± 0.25	APP:		DATE:			
1	SOP-28-MSBR-01	CONTACT	BeCu	14	Au PLATING	X. XX ± 0.10	CHECK:		DATE:			
No	Part Number	Name	Material	Q/ty	Note	X. XXX ± 0.05	DEGK:	ENG02	DATE:	20170318		