

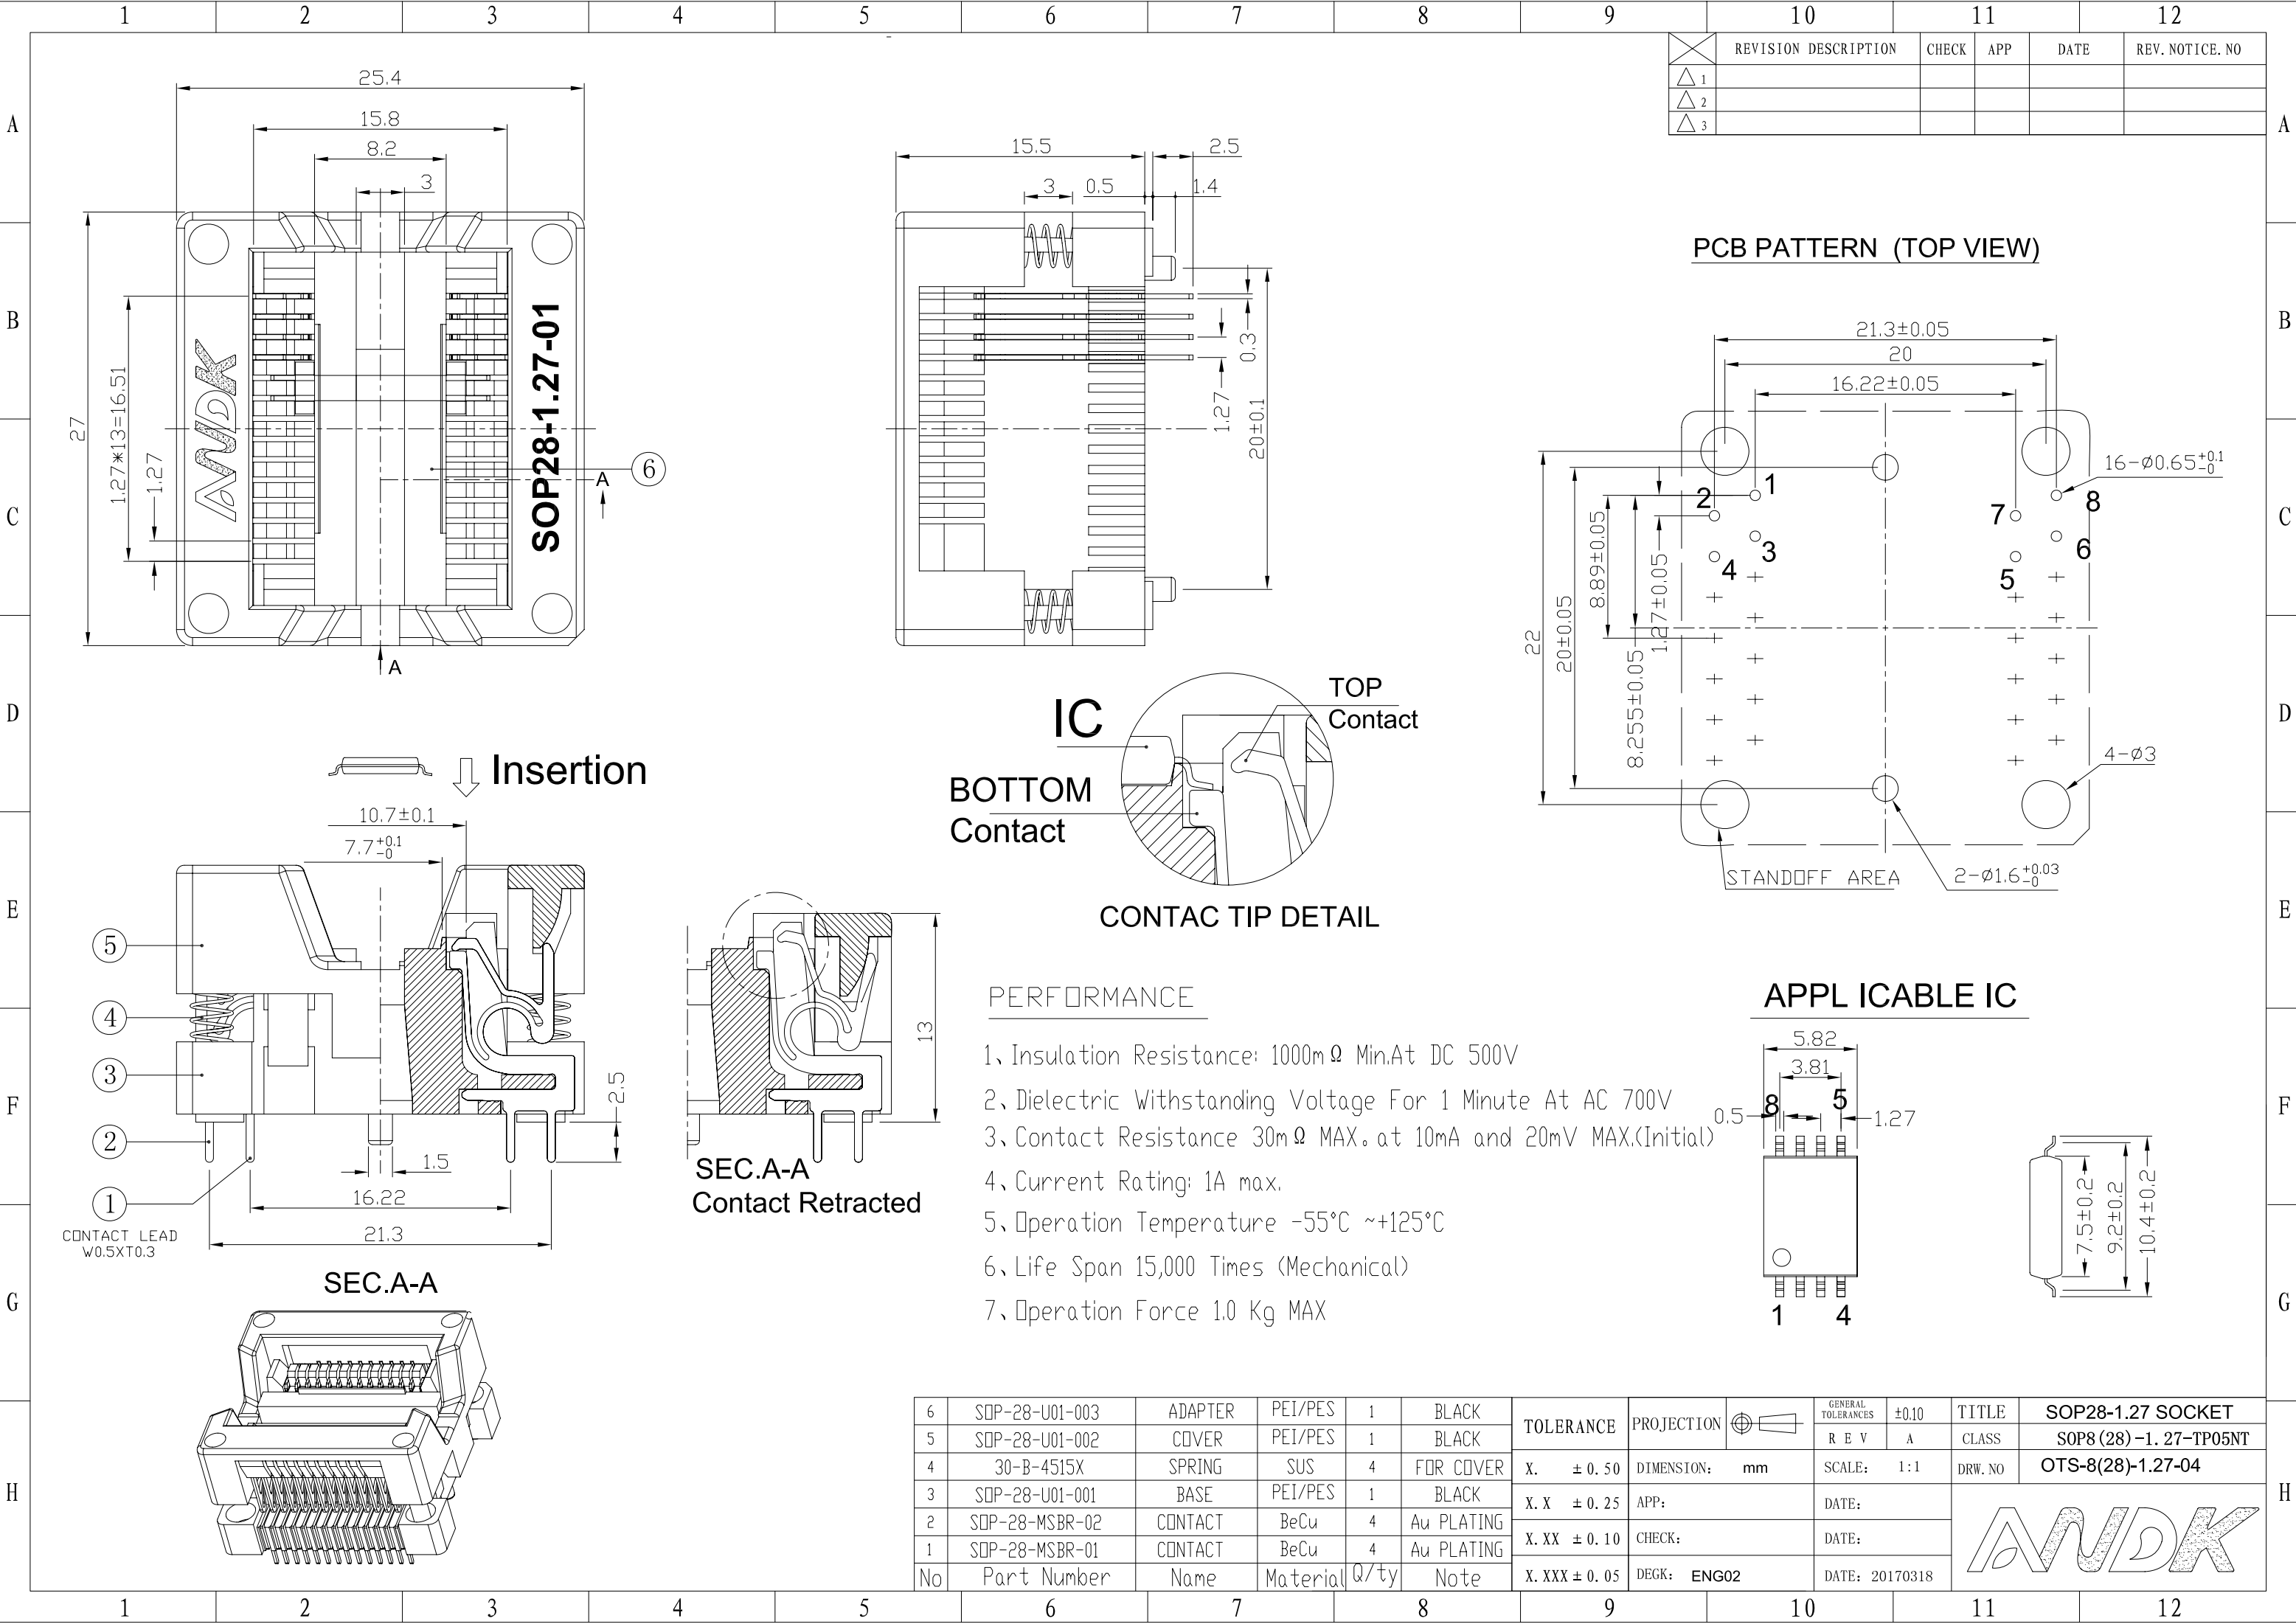


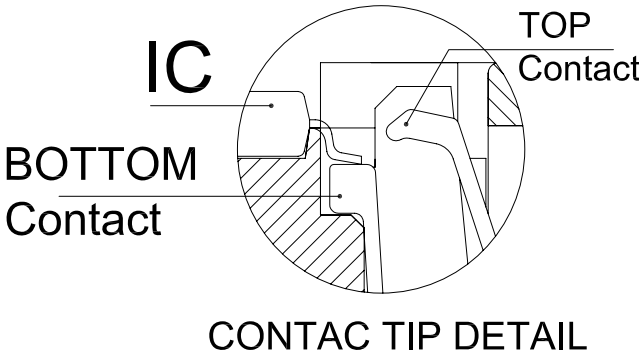

	REVISION	DESCRIPTION	CHECK	APP	DATE	REV. NOTICE. NO
△ 1						
△ 2						
△ 3						


PCB PATTERN (TOP VIEW)

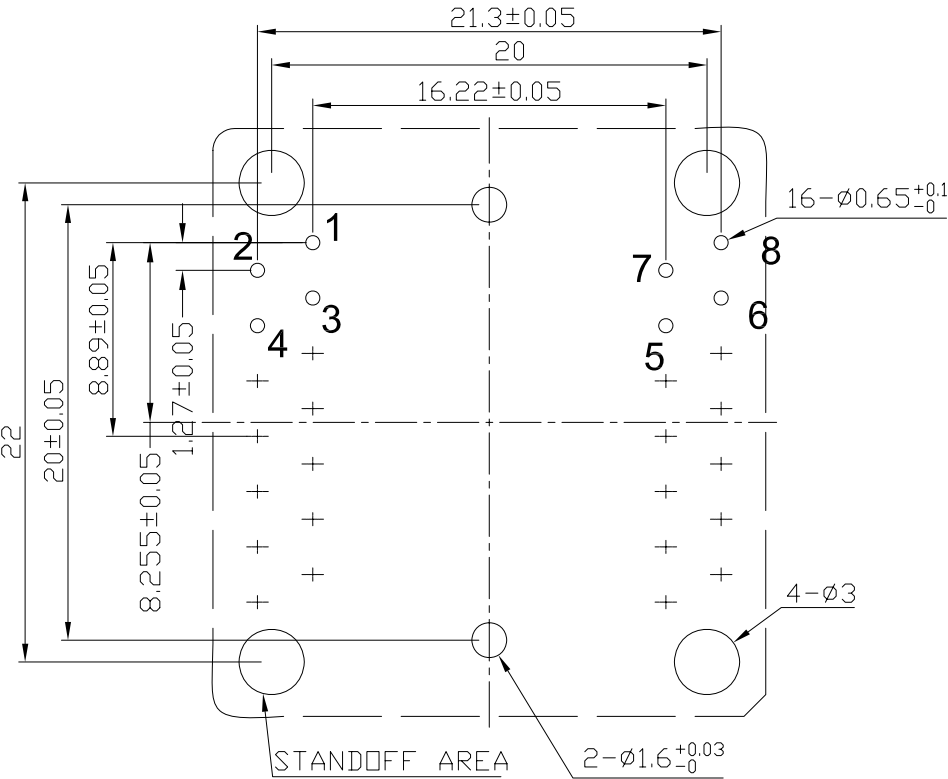

PERFORMANCE

- Insulation Resistance: 1000mΩ Min.At DC 500V
- Dielectric Withstanding Voltage For 1 Minute At AC 700V
- Contact Resistance 30mΩ MAX. at 10mA and 20mV MAX.(Initial)
- Current Rating: 1A max.
- Operation Temperature -55°C ~+125°C
- Life Span 15,000 Times (Mechanical)
- Operation Force 1.0 Kg MAX

APPL ICABLE IC

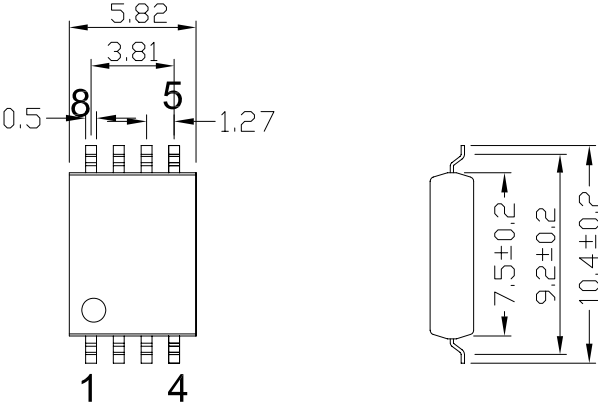

6	SDP-28-U01-003	ADAPTER	PEI/PES	1	BLACK	TOLERANCE	PROJECTION		GENERAL TOLERANCES	±0.10	TITLE	SOP28-1.27 SOCKET
5	SDP-28-U01-002	COVER	PEI/PES	1	BLACK				R E V	A	CLASS	SOP8 (28) -1. 27-TP05NT
4	30-B-4515X	SPRING	SUS	4	FOR COVER	X. ± 0. 50	DIMENSION: mm		SCALE: 1:1		DRW. NO	OTS-8(28)-1.27-04
3	SDP-28-U01-001	BASE	PEI/PES	1	BLACK	X. X ± 0. 25	APP:		DATE:			
2	SDP-28-MSBR-02	CONTACT	BeCu	4	Au PLATING	X. XX ± 0. 10	CHECK:		DATE:			
1	SDP-28-MSBR-01	CONTACT	BeCu	4	Au PLATING	X. XXX ± 0. 05	DEGK: ENG02		DATE: 20170318			
No	Part Number	Name	Material	Q/ty	Note							